

2025 Version


GPD
AUTOMOBILE ELECTRONIC


Regulator Rectifier

Design And Manufacturing







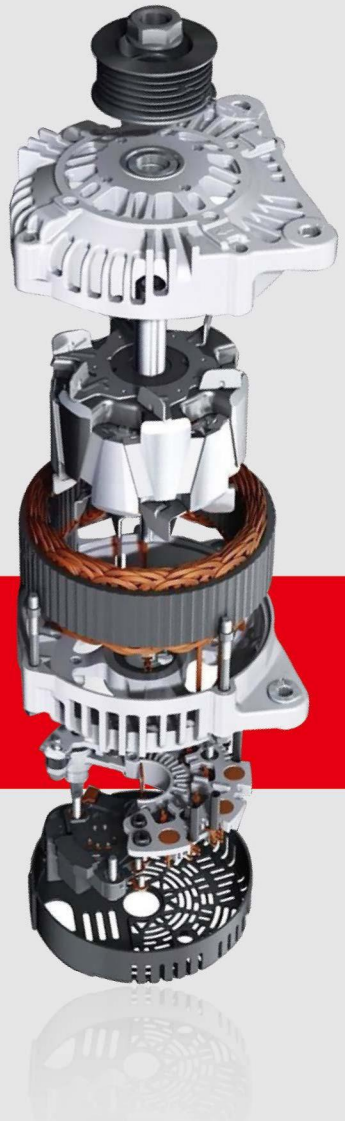

NEWEST PRODUCT CATALOG

RUIAN HENGHAO AUTOPARTS FACTORY

REGULATOR

1. BOSCH SERIES ... 01-18
2. DELCO SERIES ... 19-29
3. FORD SERIES ... 30-32
4. HITACHI SERIES ... 33-42
5. ISKRA ... 43
6. KIA HYUNDAI SERIES ... 44-46
7. LADA SERIES ... 47-49
8. LUCAS SERIES ... 50
9. MAGNETI MARELLI SERIES ... 51-52
10. MITSUBISHI SERIES ... 53- 62
11. NIPPONDENSO SERIES ... 63-75
12. VALEO SERIES ... 76-82
13. VL-PARIS RHONZ ... 83
14. NEW ITEM ... 84-93

IGNITION MODULE

1. IGNITION MODULE ... 94

BRUSH HOLDER

1. BRUSH HOLDER ... 95-96

TERMIAI BIOCK

1. TERMIAI BIOCK ... 97

RECTIFIER

1. BOSCH SERIES ... 98-106
2. DELCO SERIES ... 107-112
3. FORD SERIES ... 113-115
4. HITACHI SERIES ... 116-122
5. KOREA (MANDO) SERIES ... 123-124
6. LUCAS SERIES ... 125-126
7. MAGNETI MARELLI SERIES ... 127-128
8. MITSUBISHI SERIES ... 129-143
9. NIPPONDENSO SERIES ... 144-151
10. VL -PARIS RHONZ SERIES ... 152-153
11. LADA SERIES ... 154-155
12. NEW ITEM ... 156-159

RECTIFIER ASSY

1. RECTIFIER ASSY ... 160-165

RECTIFIER WITH BRACKETS


1. RECTIFIER WITH BRACKETS ... 166-168

HB002

FEATURES: Regulation: A -Circuit
Voltage Set Point 28.4 V

REFERENCES..

YUNYI	13400200/04-002
VOLTAG	ARP9402
UTM	RP9402A
ZAUFER	310N10159Z




HB005

FEATURES: Regulation:A-Circuit
Voltage Setpoint: 14.3 V
Terminal Identification:
Lamp-IGN-Sense Terminals

REFERENCES..

MOBILETRON	VR-B510
WAI / TRANSPO	IB510
AS	ARE0062
BOSCH	1197311540




HB033

FEATURES: Regulation:B-Circuit
Voltage Set Point:28.3V

REFERENCES..

BOSCH	0192033001
BOSCH	0192033002
WAI/TRANSPO	IB033
MOBILETRON	VR-B199-3




HB037

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.60 V
Low Cut-in Speed
Slip Ring OD: 32mm

REFERENCES..

YUNYI	13403200/04-067
WAI	IK402
MOBILETRON	VR-IK01
ISKRA	11125165




HB037B

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.1V

OEM NO :

GPD	HB037B




HB045

FEATURES: Regulation: A -Circuit
Voltage Set Point 14.5 V

REFERENCES..

WAI / TRANSPO	IK403
YUNYI	13404200/04-096
AS	ARE9070S
MOBILETRON	VR-IK02



HB305

FEATURES: B-Circuit
Voltage Set Point 14.10 V

REFERENCES..

YUNYI	13440900
WAI/TRANSPO	IB305
MOBILETRON	VR-B190
AS	ARE0232S



HB307

FEATURES: Voltage Setpoint: 28.3
VRegulation: B-Circuit

REFERENCES..

BOSCH	14406B2440
BOSCH	8320083
BOSCH	83200836




HB160

FEATURES: Regulation:B-Circuit
Voltage Set Point 14.50V Soft Start 30 %
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM Function
Self Exciting Function

REFERENCES..


YUNYI	13423200/04-129
WAI/TRANSPO	IB160
AS	ARE0067
MOBILETRON	VR-B160



HB206

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.5V
L-DFM Terminals
w/ LRC


REFERENCES..
WAI / TRANSPO IB206
AS ARE0013
MOBILETRON VR-B255
BOSCH F000RS0103



HB214

FEATURES: Regulation: A - Circuit
Voltage Set Point 14.5 V
S-DFM-L Terminals


REFERENCES..
WAI / TRANSPO IB214
AS ARE0040
MOBILETRON VR-B253
BOSCH F00M144183



HB220

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.60V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM Function


REFERENCES..
YUNYI 13421200/04-042
WAI / TRANSPO IB220
AS ARE0009
MOBILETRON VR-B256



HB225

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.60 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM function


REFERENCES..
YUNYI 13420700/04-0221
WAI/TRANSPO IB225
AS ARE0008
MOBILETRON VR-B254



HB229

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.60 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM function


REFERENCES..
YUNYI 13420900/04-026
WAI / TRANSPO IB229/IB229HD
AS ARE0041
MOBILETRON VR-B369/VR-B221



HB231

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.60 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM function


REFERENCES..
YUNYI 13420800/04-024
WAI / TRANSPO IB231
AS ARE0012
MOBILETRON VR-B252



HB235

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.60V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM function


REFERENCES..
YUNYI 13420500/04-020
WAI / TRANSPO IB235
AS ARE0040
MOBILETRON VR-B253



HB236

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 32% LRC 5 sec
Field, Shorted Circuit Protection
Sense IG Open Indication
Under Voltage Indication
Over Voltage Indication DFM Function


REFERENCES..
YUNYI 13421900/04-071
WAI / TRANSPO IB236
AS ARE0045
MOBILETRON VR-B243



HB238

FEATURES: Regulation: A -Circuit
Voltage Set Point 14.5 V
L-FR Terminals
Soft start

REFERENCES..
WAI / TRANSPO IB238
MOBILETRON VR-B271
BOSCH F00M144128
BOSCH F00M144154




HB239

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.5V
Slipring OD:14mm
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM function

REFERENCES..

YUNYI	13420400/04-015
WAI / TRANSPO	IB239
ASE	ARE0018
MOBILETRON	VR-B251




HB241

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.60 V
Soft Start 30 % ,LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication DFM Function

REFERENCES..

YUNYI	13423400/04-134
WAI/TRANSPO	IB241
AS	ARE0116
MOBILETRON	VR-B259




HB247

FEATURES:
A-Circuit
Voltage Set Point 14.60V
Soft Start 30% LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM function

REFERENCES..

YUNYI	13422100/04-086
WAI / TRANSPO	IB247
MOBILETRON	VR-B247
BOSCH	F00M144138




HB248

FEATURES:
Regulation: A -Circuit
Voltage Set Point 14.5V
Active Lamp
Soft Start
2.5 sec. LRC
Short Circuit Proection

REFERENCES..

WAI / TRANSPO	IB248
AS	ARE0087
MOBILETRON	VR-B264
BOSCH	F00M144139




HB251

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.60 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM Function

REFERENCES..

YUNYI	13421400/04-045
WAI/TRANSPO	IB251
AS	ARE0051
MOBILETRON	VR-B360




HB252

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.50V Soft Start 30 %
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke
DFM Function
Self Exciting Function

REFERENCES..

YUNYI	13421600/04-053
WAI / TRANSPO	IB252
AS	ARE0052
MOBILETRON	VR-B263




HB260

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.60 V
Soft Start 30 %
LRC 5 sec
Field Shorted Circuit Protection
Under/ Over Voltage Indication
DFM Function
Self Exciting Function

REFERENCES..

YUNYI	13422000/04-082
WAI / TRANSPO	IB260
AS	ARE0102
MOBILETRON	VR-B363




HB261

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.50V Soft Start 30 %
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke
DFM Function

REFERENCES..

WAI / TRANSPO	IB261
AS	ARE0159(BOSCH)
BOSCH	F00M144153
MOBILETRON	VR-B300




HB298

FEATURES:
Regulation:B-Circuit
Voltage Set Point 28.20V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
IG Open Indication
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM function

REFERENCES..

YUNYI	13425800 / 04-164
WAI / TRANSPO	IB298
AS	ARE0042
MOBILETRON	VR-B396




HB266

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.20 V
Soft Start 30 %,LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM function

REFERENCES..

YUNYI	13422900/04-125
WAI/TRANSPO	IB266
AS	ARE0066
MOBILETRON	VR-B883




HB283

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.60 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM function

REFERENCES..

YUNYI	13420300/04-014
WAI / TRANSPO	IB283
AS	ARE0043
MOBILETRON	VR-B371




HB297

FEATURES:
Regulation:B-Circuit
Voltage Set Point 28.50 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Sense / IG Open Indication
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM Function

REFERENCES..

YUNYI	13425900/04-165
WAI / TRANSPO	IB297
AS	ARE0054
MOBILETRON	VR-B268




HB370

FEATURES:
Regulation: A-Circuit
Voltage Set Point 15.0 V
For 32mm OD slip ring

REFERENCES..

WAI / TRANSPO	IB370
AS	ARE0001
MOBILETRON	VR-B193M
BOSCH	0192052003




HB348

FEATURES:
Regulation: A -Circuit
Voltage Set Point 15.0 V
For 32mm OD slip ring

REFERENCES..

WAI / TRANSPO	IB348
YUNYI	13410600/04-034
AS	ARE0001
MOBILETRON	VR-B193MA




HB350

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.4V
Slip ring OD:32mm

REFERENCES..

YUNYI	13410600/ 04-034
WAI / TRANSPO	IB350
AS	ARE0001
MOBILETRON	VR-B193ML




HB351

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.5V
Slip ring OD:32mm

REFERENCES..

YUNYI	13410600/ 04-034
WAI / TRANSPO	IB351
AS	ARE0001
MOBILETRON	VR-B193M




HB352

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.2V
Slip ring OD:28mm

REFERENCES..

YUNYI	13403800/04-084
WAI / TRANSPO	IB352
AS	ARE0002
MOBILETRON	VR-B195ML




HB353

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.5V
Slip ring OD:28mm

REFERENCES..

WAI / TRANSPO	IB353
AS	ARE0014
MOBILETRON	VR-B195M
BOSCH	1197311013




HB354

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.1V
Slip ring OD:28mm
With 120 Ohm Resistor

REFERENCES..

WAI / TRANSPO	IB354
AS	ARE0016
BOSCH	2197311008
MOBILETRON	VR-B196ML




HB355

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.5V
120 ohm Resistor
For 28mm Dia. Slip Ring

REFERENCES..

WAI / TRANSPO	IB355
AS	ARE0003
MOBILETRON	VR-B196MH
BOSCH	1197311003




HB356

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.8V
Slip ring OD:28mm
With 120 Ohm Resistor

REFERENCES..

WAI / TRANSPO	IB356
AS	ARE0004
CASCO	CRE10117AS
BOSCH	1197311018




HB360

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.1V
Slip ring OD:28mm

REFERENCES..

YUNYI	13411100/ 04-072
WAI / TRANSPO	IB360
AS	ARE0021
MOBILETRON	VR-B202




HB362

FEATURES:
Regulation:A-Circuit
Voltage Set Point:28.0V
Slip ring OD:28mm

REFERENCES..

WAI / TRANSPO	IB362
AS	ARE0005
BOSCH	0192053011
MOBILETRON	VR-B209




HB387

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.5V
Slipring OD:14mm
With 180 Ohm Resistor

REFERENCES..

YUNYI	13400700/04-008
WAI / TRANSPO	IB387
AS	ARE0007
MOBILETRON	VRB201




HB363

FEATURES:
Regulation:A-Circuit
Voltage Set Point:28.5V
Slip ring OD:28mm

REFERENCES..

YUNYI	13412300/04-110
WAI / TRANSPO	IB363
AS	ARE0022
MOBILETRON	VR-B209



HB368

FEATURES:
Regulation:A-Circuit
Voltage Set Point: 14.1V

REFERENCES..

BOSCH	1197311032
YUNYI	13402400/04-055
MOBILETRON	VR-B260
WAI / TRANSPO	IB368




HB369

FEATURES:
Regulation:A-Circuit
Voltage Set Point:28.0V
Slip ring OD:32mm

REFERENCES..

YUNYI	13402500/04-056
WAI / TRANSPO	IB369
AS	ARE0026
MOBILETRON	VR-B260B




HB374

FEATURES:
Regulation:A-Circuit
Voltage Set Point 28.0V
For 28mm Dia.Slip Ring

REFERENCES..

WAI / TRANSPO	IB374
YUNYI	13413500/04-158
AS	ARE0027
MOBILETRON	VR-B198




HB376

FEATURES:
Regulation: A -Circuit
Voltage Set Point 28.0 V
For 32mm OD slip ring

REFERENCES..

WAI / TRANSPO	IB376
AS	ARE0015
MOBILETRON	VR-B197
BOSCH	0192053001




HB379

FEATURES:
Regulation:A-Circuit
Voltage Set Point:28.3V
Slipring OD:28mm

REFERENCES..

WAI / TRANSPO	13411800/04-095
WAI	IB379
AS	ARE0027
CQ	CQ1010023




HB358

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.5V
Slip ring OD:32mm

REFERENCES..

YUNYI	13411600/04-087
WAI / TRANSPO	IB358
AS	ARE0001
MOBILETRON	VR-B192




HB381

FEATURES:
Regulation:A-Circuit
Voltage Set Point:28.1V
Slipring OD:28mm

REFERENCES..

YUNYI	13400500/04-006
WAI / TRANSPO	IB381
AS	ARE0032
MOBILETRON	VR-B206




HB382

FEATURES:
Regulation:A-Circuit
Voltage Set Point:28.8V
Slipring OD:28mm

REFERENCES..

YUNYI	13400500/04-006
WAI / TRANSPO	IB382
BOSCH	F00M405220
MOBILETRON	VR-B206




HB385

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

WAI / TRANSPO	IB385
YUNYI	13401400/04-031
AS	ARE0006
MOBILETRON	VR-B200H




HB384

FEATURES:
Regulation: A-Circuit
Voltage Set Point 14.5 V
68 Ohm Resistor
For 14mm Dia.Slip Ring

REFERENCES..

WAI	IB384
MOBILETRON	VR-B208H
BOSCH	1197311514
BOSCH	1197311239




HB388

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.6V
Slip Ring OD:14mm
Without 180 Ohm Resister

REFERENCES..

WAI / TRANSPO	IB388
AS	ARE0011
MOBILETRON	VR-B222
YUNYI	13402300/04-054




HB679

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.3V
Active Lamp Soft Start
5.0 sec. LRC Short Circuit Protection
Self-Exciting

REFERENCES..

WAI / TRANSPO	IB679
AS	ARE0202(BOSCH)
MOBILETRON	VR-B363
BOSCH	F00M144177




HB885

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.2V LIN 1.3
COM01: LIN 1-1
COM02: LIN1-H-1 B
19200 Baud Rate (4 Byte)
ID Code: 24

REFERENCES..

YUNYI	13430330
WAI / TRANSPO	IB885
AS	ARE0133P
MOBILETRON	VR-B885




HB178

FEATURES:
Regulation: A -Circuit
Voltage Set Point 28.2 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under/ Over Voltage Indication
DFM Function

REFERENCES..

WAI / TRANSPO	IB125
YUNYI	04-104/13422300
BOSCH	F00M144178




HB5225

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.60 V
Soft Start 30 %,LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM function
Self Exciting Function

REFERENCES..

YUNYI	13420700/04-0221
WAI / TRANSPO	IB5225
AS	ARE0008
MOBILETRON	VR-B254




HB6150

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.2V LIN 1.3
COM01: LIN 1-1
COM02: LIN1-H-1 B
19200 Baud Rate (4 Byte) ID Code: 8

REFERENCES..

YUNYI	13430200/04-140
WAI / TRANSPO	IB6150
AS	ARE0081
MOBILETRON	VR-B150




HB6197

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.1V LIN 1.3
COM01: LIN 1-1 COM02: LIN1-H-1 B
19200 Baud Rate (4 Byte) ID Code: 24

REFERENCES..

WAI / TRANSPO	IB6197
AS	ARE0119P
BOSCH	F00M144151
MOBILETRON	VR-B4197




HB6003

FEATURES:
Regulation: B - Circuit
Voltage Set Point 14.5 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
L Terminal Drives Choke
Under/ Over Voltage Indication
DFM Function

REFERENCES..

YUNYI	13440500/04-128
BOSCH	1275200003
BOSCH	272220703
MOBILETRON	VR-B703




HB731

FEATURES:
Regulation: B - Circuit
Voltage Set Point 14.5V
L-FR Terminals Soft Start
2.5 Sec. LRC
Short Circuit Protection

REFERENCES..

WAI / TRANSPO	IB731
AS	ARE0165
MOBILETRON	VR-B0701
BOSCH	0272220701




HB843

FEATURES:
Regulation: B - Circuit
Voltage Set Point 14.3V LIN 1.3
COM01:LIN 1-1
COM02:LIN 1-H-4 B
19200 Baud Rate (4 Byte) ID Code：32

REFERENCES..

YUNYI	13445460
WAI / TRANSPO	IB843
BOSCH	0272220813
MOBILETRON	VR-B843




HB6020

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.30 V
Soft Start 25 %,LRC 3 sec
Self Exciting Function
LIN Regulator

REFERENCES..

YUNYI	13451810
WAI / TRANSPO	IB6020
AS	ARE0225S
MOBILETRON	VR-B020




HB6026

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.5V
Soft Start 8.5 sec. LRC
Short Circuit Protection
FR is in phase with F
L-DFM Terminals

REFERENCES..

YUNYI	13450100/04-078
WAI / TRANSPO	IB6026
AS	ARE0061
MOBILETRON	VR-B026




HB6037

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.40 V
COM ID Code:56
LIN(COM) Regulator
LIN-NA Terminals

REFERENCES..

YUNYI	13450800/04-145
WAI / TRANSPO	IB6037
AS	ARE0077
MOBILETRON	VR-B021




HB6056

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 13.8V LIN 1.3
COM01: LIN 1-1
COM02: LIN1-M-1 B
9600 Baud Rate (4 Byte) ID Code: 88

REFERENCES..

YUNYI	13451700/04-118
BOSCH	F00M346005
BOSCH	F00M346056
MOBILETRON	VR-B0506




HB6165

FEATURES:
Regulation:B-Circuit
Voltage Set Point 13.70 V
Soft Start 25 %,LRC 3 sec
Self Exciting Function
LIN Regulator

REFERENCES..

YUNYI	13451900
WAI/TRANSPO	IB6165
AS	ARE0107
MOBILETRON	VR-B057



HB6011

FEATURES:
B-Circuit
Voltage Set Point 14.50V
Soft Start 19% LRC 9 sec
Field, Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke
DFM function

REFERENCES..

WAI / TRANSPO	IB6011
MOBILETRON	VR-B340
AS	ARE0064
YUNYI	13450200/04-089



HB6129

FEATURES:
B-Circuit
Voltage Set Point 14.30V
Soft Start 12% LRC 3 Sec
Self Exciting Function
LIN1.3 Class 4 LIN Regulator

REFERENCES..

BOSCH	F00M346129
MOBILETRON	VR-B6129
WAI / TRANSPO	IB6129
YUNYI	13452020




HB6112

FEATURES:
Regulation:B-Circuit
Voltage Set Point:14.3V

REFERENCES..

BOSCH	F00M346112
BOSCH	0125813002
MOBILETRON	VRB112
YUNYI	13450410




HB343

FEATURES:
Regulation:A-Circuit
Voltage Set Point: 14.4V

REFERENCES..

WAI / TRANSPO	IB343
YUNYI	13412600-04-124
MOBILETRON	VR-B393
BOSCH	9191067043



HB366

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.6V

REFERENCES..

BOSCH	1197311323
BOSCH	0120469102
WAI / TRANSPO	IB366
MOBILETRON	VR-B203




HB545

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 32 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFM function Active lamp - with output

REFERENCES..

YUNYI	13460100/04-025
WAI/TRANSPO	IB545
AS	ARE0010
MOBILETRON	VR-B238




HB529

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.1V

REFERENCES..

BOSCH	1197311529
WAI / TRANSPO	IB529
YUNYI	13402800/04-063
MOBILETRON	GA1089IR




HB392

FEATURES: Regulation: A -Circuit
Voltage Set Point 14.3 V
28mm Dia. Slip Ring
L-S Terminals

REFERENCES..

WAI / TRANSPO	IB392
YUNYI	13413200/04-149
AS	ARE0050(OEM)
MOBILETRON	VR-B392




HB501

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.50 V

REFERENCES..

YUNYI	13412200/04-103
WAI/TRANSPO	IB501
AS	ARE0033
MOBILETRON	VR-B250



HB543

FEATURES: Regulation:B-Circuit
Voltage Set Point: 28.5V

REFERENCES..

WAI / TRANSPO	IB543
MOBILETRON	VR-B543B
AS	ARE0053
YUNYI	S04-043/13460300



HB558

FEATURES: Regulation:B-Circuit
Voltage Set Point: 25.6V

REFERENCES..

WAI / TRANSPO	IB558
AS	ARE0056
YUNYI	13460200/04-027
MOBILETRON	VR-B558B



HB547

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.4V

REFERENCES..

YUNYI	13460100/04-025
MOBILETRON	VR-B238
WAI / TRANSPO	IB547
BOSCH	1197311547



HB520

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.6V

REFERENCES..

BOSCH	1197311518
BOSCH	1197311520
MOBILETRON	VR-B229
WAI / TRANSPO	IB520



HB227

FEATURES:
A-Circuit
Voltage Set Point 14.70V
Soft Start 30% LRC 5 sec
Field Shorted Circuit Protection
Under/Over Voltage Indication
L Terminal Drives Choke
DFM Function

REFERENCES..

BOSCH	F00M145227
MOBILETRON	VR-B265
WAI / TRANSPO	IB227
YUNYI	13423300/04-133




HB313

FEATURES:
Soft Start 2.5 sec. LRC
Short Circuit Protection
Self Exciting
Voltage Set Point: 14.5V

REFERENCES..

BOSCH	F00M144129
AS	ARE0131
MOBILETRON	VRB129
WAI / TRANSPO	IB313

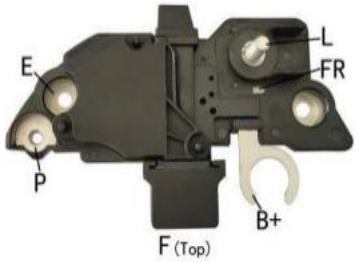


HB5369

FEATURES:
A-Circuit Voltage Set Point 14.60V
Soft Start 30% LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM function
Self Exciting Function

REFERENCES..

BOSCH	F00MA45211
MOBILETRON	VR-B369
YUNYI	13427300/04-0261
WAI / TRANSPO	IB5369




HB5379

FEATURES:
B-Circuit
Voltage Set Point 13.70V
Soft Start 25%
LRC 3 sec
Self Exciting Function
LIN Regulator

REFERENCES..

BOSCH	F00M145311
MOBILETRON	VR-B379
WAI / TRANSPO	IB5379
YUNYI	13424000/04-162




HB696

FEATURES:
B-Circuit
RVC=0 V set=13.80V
RC=70% V set=14.45V
Soft Start 18.75%
LRC 2.5 sec
DFM function
RVC Regulator

REFERENCES..

BOSCH	F00M145314
YUNYI	13430400/04-146
WAI / TRANSPO	IB696
MOBILETRON	VR-B4191




HB276

FEATURES:
A-Circuit Voltage Set Point 14.60V
Soft Start 30% LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke
DFM function Self Exciting Function

REFERENCES..

BOSCH	F00M145276
YUNYI	13423000/04-126
MOBILETRON	VR-B242
WAI / TRANSPO	IB276




HB200

FEATURES:
A-Circuit
Voltage Set Point 14.60V
Soft Start 30% LRC 5 sec
Field Shorted Circuit Protection
IG Open Indication
Under Voltage Indication
Over Voltage Indication

REFERENCES..

BOSCH	F00M225200
MOBILETRON	VR-B394
AS	ARE0055
YUNYI	13421100/04-035

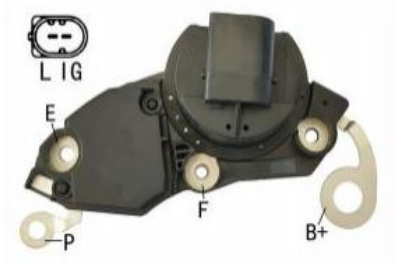


HB201

FEATURES:
A-Circuit
Voltage Set Point 14.60V
Soft Start 30% LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indic ation
Over Voltage Indication
L Terminal Drives Choke

REFERENCES..

YUNYI	13421000/04-028
AS	ARE0044
MOBILETRON	VR-B257
WAI / TRANSPO	IB201

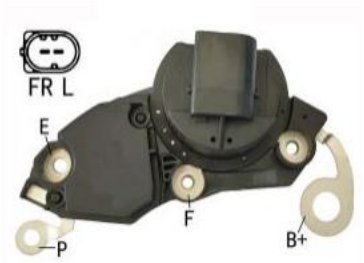


HB1500

FEATURES:
Regulation:B-Circuit
Voltage Set Point:14.5V

REFERENCES..

GPD	HB1500



HB209

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.3V

REFERENCES..

YUNYI	1341AF00
BOSCH	F002G90078




HB212

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.4V

REFERENCES..

BOSCH	F002G10376
BOSCH	F002G90088
MOBILETRON	VR-B269
AS	ARE0210

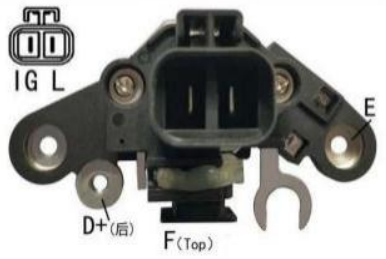


HB286

FEATURES: B-Circuit Voltage Set Point 14.50V
Soft Start 30% LRC 5 sec
Lamp Shorted Circuit Protection
Field Shorted Circuit Protection
Under/Over Voltage Indication
L Terminal Drives Choke
DFM Function Self Exciting Function

REFERENCES..

YUNYI	13421800/04-069
MOBILETRON	VR-B270
AS	ARE0057
WAI / TRANSPO	IB286



HB347

FEATURES: A-Circuit
Voltage Set Point 14.60V
Soft Start 18% LRC 5 sec
Sense Loss Indication
Field Shorted Circuit Protection
Under/Over Voltage Indication
Self Exciting Function

REFERENCES..

BOSCH	F00M145207
YUNYI	13429500
MOBILETRON	VR-B267
WAI / TRANSPO	IB347




HB875

FEATURES: A-Circuit Voltage Set Point 14.50V
Soft Start 32% LRC 5 sec
Field Shorted Circuit Protection
IG/Sense Open Indication
Under/Over Voltage Indication
L Terminal Drives Choke
DFM Function

REFERENCES..

BOSCH	F00M145332
BOSCH	F00M145391
YUNYI	13440300/04-114
WAI / TRANSPO	IB875




HB262

FEATURES: A-Circuit
Voltage Set Point 14.30V
Soft Start 20%
LRC 3 sec
Self Exciting Function
BSS Regulator

REFERENCES..

WAI / TRANSPO	IB262
MOBILETRON	VR-B880
YUNYI	13422500/04-107
AS	ARE0078




HB5881

FEATURES: A-Circuit
Voltage Set Point 14.30V
Soft Start 25%
LRC 3 sec
Self Exciting Function
BSS_3 ID=31 BSS Regulator

REFERENCES..

BOSCH	F00M145881
MOBILETRON	VR-B657
YUNYI	13422520
WAI / TRANSPO	IB5881




HB5235

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.4V

REFERENCES..

GPD	HB5235
BOSCH	F00MA45235



HB226

FEATURES: A-Circuit
Voltage Set Point 14.60V
Soft Start 18% LRC 2.5 Sec
Field Lamp Shorted Circuit Protection
Under/Over Voltage Indication
DFM Function

REFERENCES..

BOSCH	F00M144172
YUNYI	1342AH00
MOBILETRON	VR-B372
WAI / TRANSPO	IB226




HB5330

FEATURES:
B-Circuit
Voltage Set Point 14.70V
Soft Start 30% LRC 5 sec
Field Shorted Circuit Protection
Under/Over Voltage Indication
DFM Function

REFERENCES..

BOSCH	F00M145330
MOBILETRON	VR-B330
AS	ARE0114
YUNYI	13440600/04-131



HB2725

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.7V

REFERENCES..

GPD	HB2725



HB5300

FEATURES:
B-Circuit
Voltage Set Point25.6V
Soft Start 30%
LRC 5 sec Field Shorted Circuit Protection
IG Open Indication
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM function

REFERENCES..

BOSCH	F00M144106
WAI / TRANSPO	IB5300
MOBILETRON	VR-B122B
YUNYI	13423700/04-150




HB678

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.3V

REFERENCES..

MOBILETRON	VRB278
BOSCH	F00M145278
BOSCH	F00MA45218
WAI / TRANSPO	IB678



HB2704

FEATURES:
B-Circuit
Voltage Set Point 28.40V
Soft Star 12.5%
Self Exciting Function
Field Shorted Circuit Protection
Under/Over Voltage Indication DFM Function

REFERENCES..

BOSCH	0124655307
BOSCH	ALB5327UX
AS	ARE0237S
YUNYI	1342AZ00




HB280

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.3V

REFERENCES..

BOSCH	F00M145280
BOSCH	F00M145679
YUNYI	13423600/04-147
MOBILETRON	VR-B280




HB293

FEATURES:
A-Circuit
Voltage Set Point 14.30V
Soft Start 20% LRC 3 sec
Self Exciting Function
BSS Regulator

REFERENCES..

YUNYI	13422400/04-106
BOSCH	F00M145293
MOBILETRON	VR-B385
WAI / TRANSPO	IB293




HB2712

FEATURES:
B-Circuit
Voltage Set Point 28.3V
Soft Start 25%
Self Exciting Function
LIN Regulator:12V
LIN BUS
LIN 2.1

REFERENCES..

BOSCH	0272222012
BOSCH	F00M415203
YUNYI	1342GA00




HB5301

FEATURES:
B-Circuit
Voltage Set Point 14.30V
Soft Start 25% LRC 3 Sec
Self Exciting Function
LIN Regulator

REFERENCES..

YUNYI	13430220
WAI / TRANSPO	IB5301
MOBILETRON	VR-B301
BOSCH	F00MA45301




HB5289

FEATURES:
A-Circuit
Voltage Set Point 14.30V
Soft Start 25%
Self Exciting Function
BSS_3 ID=12
BSS Regulator

REFERENCES..

MOBILETRON	VR-5223
YUNYI	13422530
BOSCH	F00M145656
WAI / TRANSPO	IB5289




HB5887

FEATURES:
B-Circuit
Voltage Set Point 14.30V
Soft Start 25%
LRC 3 Sec
Self Exciting Function
LIN Regulator

REFERENCES..

BOSCH	F00M144159
BOSCH	F00M145887
YUNYI	13430320




HB5378

FEATURES:
B-Circuit
Voltage Set Point 14.30 V
LRC 3 sec
Self Exciting Function
LIN Regulator LIN1.3

REFERENCES..

BOSCH	F00M144158
YUNYI	13430340
MOBILETRON	VR-B378
WAI / TRANSPO	IB5378



HB6164

FEATURES:
B-Circuit
Voltage Set Point 14.30V
Soft Start 25% LRC 3 sec
Self Exciting Function
LIN1 Class 08 LIN Regulator

REFERENCES..

MOBILETRON	VR-B6164
BOSCH	F00M346152
BOSCH	F00M346164
YUNYI	13450910



HB6070

FEATURES:
B-Circuit
Voltage Set Point 14.30V
Soft Start 20% LRC 3 Sec
Self Exciting Function
BSS_3 ID=1 BSS Regulator

REFERENCES..

BOSCH	F00M346051
MOBILETRON	IB6070
YUNYI	13452200
AS	ARE0178




HB6090

FEATURES:
B-Circuit
Voltage Set Point 14.30V
Soft Start 25%
Self Exciting Function
BSS_3 ID=6 Class 3 BSS Regulator

REFERENCES..

BOSCH	F00M346042
MOBILETRON	VR-B6138
YUNYI	13452210
AS	ARE0172



HB6137

FEATURES:
B-Circuit Voltage Set Point 14.50V
Soft Start 30%
Field, Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke DFM Function

REFERENCES..

BOSCH	F00M346028
YUNYI	13451000
MOBILETRON	VRB029/VRB137
WAI / TRANSPO	IB6137



HB6025

FEATURES:
B-Circuit
BSS Connections
ID Code: 1

REFERENCES..

MOBILETRON	VR-B088
BOSCH	F00M346025
BOSCH	F00M346032
YUNYI	13452802




HB6024

FEATURES:
B-Circuit
BSS 3 Connections
for testing
ID Code: 6

REFERENCES..

YUNYI	13452100
MOBILETRON	VR-B033
BOSCH	F00M346019
WAI / TRANSPO	IB6024



HB6158

FEATURES:
Voltage Set Point: 14.3V
LIN 1.3
COM01: LIN 1-1
COM02: LIN1-A-4 B
9600 & 19200 Baud Rate (4 Byte)
testing ID Code: 64

REFERENCES..

BOSCH	F00M346158
YUNYI	13451820
MOBILETRON	VR-B6164




HB742

FEATURES:
Regulation:B-Circuit
Voltage Set Point:28.2V

REFERENCES..

BOSCH	0272220742
KRAUF	ARB1816AN
UTM	RB1816A
YUNYI	1344AA00




HB835

FEATURES:
B-Circuit
Voltage Set Point 14.30V
Soft Start 25% LRC 3 Sec
Self Exciting Function
LIN1 Class 02 LIN Regulator

REFERENCES..

BOSCH	0272220835
MOBILETRON	VR-B835
YUNYI	13445450
BOSCH	0125711113




HB854

FEATURES:
B-Circuit
Voltage Set Point 14.30V
Soft Start 12.5%
LRC 3 Sec
Self Exciting Function LIN Regulator

REFERENCES..

BOSCH	ALB3805UX
BOSCH	F000BL0805
MOBILETRON	VR-B854
YUNYI	13445410




HB839

FEATURES:
B-Circuit
Voltage Set Point 14.30V
Soft Start 25%
LRC 3 Sec
Self Exciting Function
LIN1 Class 03 LIN Regulator

REFERENCES..

BOSCH	F00M346151
BOSCH	0125711055
MOBILETRON	VR-B839
YUNYI	13445430



HB807

FEATURES:
B-Circuit
Voltage Set Point 14.30V
Soft Start 25%
LRC 3 Sec
Self Exciting Function
LIN2 Class 08 LIN Regulator

REFERENCES..

BOSCH	F00M346152
WAI / TRANSPO	IB807
YUNYI	13445440
MOBILETRON	VR-B807




HB822

FEATURES:
Voltage Set Point: 14.3V LIN 1.3
COM01: LIN 1-1 COM02: LIN1-H-4 B
19200 Baud Rate (4 Byte)
Requires COM01 or COM02 test adaptor for testing
ID Code:80ID Code:80

REFERENCES..

BOSCH	0272220822
BOSCH	0125812057
MOBILETRON	VR-B822
WAI / TRANSPO	IB822



HB925

FEATURES:
Regulation:B-Circuit
Voltage Set Point:14.3V

REFERENCES..

BOSCH	0272220925
WAI / TRANSPO	IB925



HB927

FEATURES:
Regulation:B-Circuit
Voltage Set Point:14.3V

REFERENCES..

BOSCH	0272220927
GPD	HB927




HB844

FEATURES: Voltage Set Point: 14.0V LIN 1.3
COM01: LIN 1-1
COM02: LIN1-H-4 B
for testing ID Code: 24

REFERENCES..

BOSCH	0272220844
MOBILETRON	VR-B844
WAI / TRANSPO	IB844
BOSCH	0272220814




HB823

FEATURES: B-Circuit
Voltage Set Point: 13.7V LIN 2.0
COM01: LIN 2-1
COM02: LIN2-H-2 F
19200 Baud Rate (4 Byte)
testing ID Code: 88

REFERENCES..

BOSCH	0272220823/0125711041
BOSCH	0125812012/0125812037
WAI / TRANSPO	IB823
MOBILETRON	VR-B823




HB867

FEATURES: B-Circuit
Voltage Set Point 13.70V
Soft Start 12.5%
LRC 5 Sec
Self Exciting Function
LIN1 Class 11
LIN Regulator

REFERENCES..

BOSCH	0272220828/0272220867
MOBILETRON	VR-B867
WAI / TRANSPO	IB867
YUNYI	1344AN00




HB879

FEATURES: B-Circuit
Voltage Set Point 13.70V
Soft Start 12.5%
Self Exciting Function
LIN1.3 Class 8
LIN Regulator

REFERENCES..

YUNYI	1344AU10
BOSCH	0272220879
UTM	RB9879A




HB817

FEATURES: B-Circuit Voltage Set Point: 14.3V
LIN 1.3 COM01: LIN 1-1
COM02: LIN1-A-3 E
19200 Baud Rate
testing ID Code: 88

REFERENCES..

BOSCH	0272220817
BOSCH	0125812002
MOBILETRON	VR-B817
UTM	RB6158A




HB818

FEATURES: B-Circuit Voltage Set Point: 14.3V
LIN 1.3 COM01: 1-1
COM02: LIN1-A-3 E
9600/19200 Baud Rate (4 Byte)
testing ID Code: 120

REFERENCES..

YUNYI	1344AU20
MOBILETRON	VR-B0818
BOSCH	027220818/F00M346112
WAI / TRANSPO	IB818




HB704

FEATURES: B-Circuit
Voltage Set Point 14.50V
Soft Start 30% LRC 5 sec
Field Shorted Circuit Protection
Under/Over Voltage Indication
L Terminal Drives Choke
DFM Function Self Exciting Function

REFERENCES..

MOBILETRON	VR-B704
YUNYI	13450500/04-121
BOSCH	0272220704
BOSCH	F000BL0605




HB550

FEATURES: B-Circuit RVC=0 Vset=13.80V
RC=70% Vset=14.45V
Soft Start 18.75%
LRC 2.5 sec
DFM function RVC Regulator

REFERENCES..

BOSCH	0272220776
BOSCH	F000BL06W8
MOBILETRON	VR-B776
YUNYI	1344AM00




HB827

FEATURES: B-Circuit Voltage Set Point 14.30V
Soft Start 25%
Self Exciting Function
LIN Regulator
ID 48 Class 6

REFERENCES..

BOSCH	F000BL0814
YUNYI	13448760
MOBILETRON	VR-B827
WAI / TRANSPO	IB827




HB5651

FEATURES:
A-Circuit
Voltage Set Point 14.30V
Soft Start 25% LRC 3 sec
Self Exciting Function
BSS Regulator

REFERENCES..

BOSCH	F00M145651
OEM NO :	F00MA45302
WAI / TRANSPO	IB5302
YUNYI	13423610




HB840

FEATURES:
B-Circuit Voltage Set Point 14.30V
Soft Start 25% LRC 3 Sec
Self Exciting Function
LIN1 Class 01
LIN Regulator

REFERENCES..

BOSCH	0272220810
YUNYI	13448710
WAI / TRANSPO	IB840
MOBILETRON	VR-B840




HB882

FEATURES:
Voltage Set Point: 14.3V LIN 2.0
COM01: LIN 2-1
COM02: LIN2-H-2 F
19200 Baud Rate (4 Byte)
testing ID Code: 24

REFERENCES..

MOBILETRON	VR-B882
AS	UD18756ARE
KRAUF:	ARB1141
BOSCH	0272220882




HB0706

FEATURES:
Regulation: B - Circuit
Voltage Set Point 14.5V
L-FR Terminals
Soft Start 2.5 Sec. LRC
Short Circuit Protection

REFERENCES..

KRAUF	ARB0408AD
YUNYI	13440800-04-155
AS	ARE0136
BOSCH	0272220706




HB739

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.50 V
Soft Start 25 % LRC 5 Sec
C Terminal Regulator
Field Shorted Circuit Protection
Self Exciting Function
DFM Function

REFERENCES..

BOSCH	0272220709
KRAUF	ARB1099
MOBILETRON	VR-B709
AS	ARE0245S




HB718

FEATURES:
Regulation:B-Circuit
Voltage Set Point:14.5V

REFERENCES..

BOSCH	0272220718
UTM	RB3451A
KRAUF	ALB7667UX
KRAUF	F000BL06H9




HB5027

FEATURES:
Regulation:B-Circuit
Voltage Set Point:14.5V

REFERENCES..

KRAUF:	ARR6781DD
UTM:	RR6781A/RR6781B
ZAUFER:	310N10353Z
ZAUFER:	ALR3781YX



HB5028

FEATURES:
Regulation:B-Circuit
Voltage Set Point:14.3V

REFERENCES..

BOSCH	F000BL0567
BOSCH	F000BL0657
YUNYI	13446000
MOBILETRON	VR-B0757




HB890

FEATURES:
B-Circuit
Voltage Set Point 13.80V
Soft Start 12%
Self Exciting Function
LIN1.3 Class 26
LIN Regulator

REFERENCES..

BOSCH	0272220890
BOSCH	F000BL0132
TOYOTA:	277000L100
YUNYI	1344AU00




HB3102

FEATURES:
B-Circuit
RVC=0 Vset=13.80V
RVC=75% Vset=14.60V
Soft Start 22 %
LRC 2.5 sec
DFM function RVC Regulator

REFERENCES..

BOSCH	0272223102
BOSCH	0272223105
MOBILETRON	VR-B3102
YUNYI	1348060




HB3010

FEATURES:
B-Circuit
Voltage Set Point: 14.3V LIN 1.3
COM01: LIN 1-1
COM02: LIN1-A-3 E
9600 & 19200 Baud Rate (4 Byte)
testing ID Code: 64

REFERENCES..

BOSCH	0272223010
BOSCH	0126312014
BOSCH	0126312016
MOBILETRON	VR-B3010




HB3011

FEATURES:
Regulation:B-Circuit
Voltage Set Point:13.9V

REFERENCES..

BOSCH	0272223011
BOSCH	0126312086
YUNYI:	13480400
KRAUF	ARB1121LP




HB874

FEATURES:
Regulation:B-Circuit
Voltage Setpoint: 12 V
LIN-Regulator

REFERENCES..

BOSCH	12318571357
BOSCH	0272223003
BOSCH	0125814004
MOBILETRON	VR-B3003




HB3021

FEATURES:
Voltage Set Point: 14.0V LIN 1.3
COM01: LIN 1-1
COM02: LIN1-H-4 B
19200 Baud Rate (4 Byte)
ID Code: 24

REFERENCES..

BOSCH	0272223021
BOSCH	FOOM465240
MOBILETRON	VR-B3021
JEEP	50050829




HB3023

FEATURES:
B-Circuit
Voltage Set Point: 14.3V LIN 1.3
COM01: 1-1
COM02: LIN1-A-3
9600/19200 Baud Rate (4 Byte)
Requires COM01 or COM02 test adaptor for testing ID Code: 104

REFERENCES..

BOSCH	0272223023
BOSCH	0126712054
MOBILETRON	VR-B3023
BMW	12318671634




HB3024

FEATURES:
B-Circuit
Voltage Set Point: 14.2V LIN 1.3
COM01: LIN 1-1
COM02: LIN1-H-4 B
19200 Baud Rate (4 Byte)
testing ID Code: 104

REFERENCES..

BOSCH	0272223024
BOSCH	0125716009
MOBILETRON	VR-B3024
WAI / TRANSPO	IB3024




HB3028

FEATURES:
Voltage Set Point: 14.0V LIN 2.0
COM01: LIN 2-1
COM02: LIN2-H-2 F
19200 Baud Rate (4 Byte)
ID Code: 32

REFERENCES..

BOSCH	0272223028
BOSCH	0272223022
MOBILETRON	VR-B3028




HB3003

FEATURES:
Voltage Set Point: 14.3V LIN 1.3
COM01: LIN 1-1
COM02: LIN1-A-3 E
19200 Baud Rate (4 Byte)
ID Code: 96
Regulation: B Circuit

REFERENCES..

BOSCH	0272223003
BOSCH	0125814004
WAI / TRANSPO	IB3003
MOBILETRON	VR-B3003



HB185

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.4V

REFERENCES..
OEM NO : JFZ171/JFZ176/JFZ172
OEM NO : RQ8381A
ZAUFER 310N10923Z



HD10AC

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.6V

REFERENCES..

WAI / TRANSPO	D10AC
CAT	358228/3N3754
UNIPOINT	YR814SC
YUNYI	13120800/01-046




HD10

FEATURES:
Regulation: A -Circuit
Voltage Set Point 14.8 V

OEM NO :

WAI	D10
LUCAS	UCB701
CATERPILLAR	358228
DELCO	D668




HD21N

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.0 V

OEM NO :

WAI	D21N
AS	ARE1075S
MOBILETRON	VR-D682
CARGO	233204




HD27

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.00 V

OEM NO :

YUNYI	13120100 / 01-010
WAI	D27
ASE	ARE1034
MOBILETRON	VR-D718




HD33

FEATURES:
Voltage Setpoint: 14.1 V
Regulation:A-Circuit

OEM NO :

YUNYI	13120100
WAI	D33
ASE	ARE1034
MOBILETRON	VR-D718




HD101

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.8V

OEM NO :

YUNYI	13120700
ASE	ARE1001
WAI	D101
WOODAUTO	VRG3693A




HD102

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.0V

OEM NO :

YUNYI	13120900 / 01-047
ASE	ARE1002
WAI / TRANSPO	D102HD
WOODAUTO	VRG3693F




HD104

FEATURES:
Regulation:A-Circuit
Voltage Set Point 28.10 V

OEM NO :

YUNYI	13120600
ASE	ARE1002
WAI	D104HD
WOODAUTO	VRG3693F




HD604

FEATURES:
Regulation:A-Circuit
Voltage Set Point: 14.7V

REFERENCES..

DELCO	4982614
MOBILETRON	VR-D670C
WAI / TRANSPO	DE604/35146




HD605

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.8V

REFERENCES..

DELCO	3493029
DELCO	3493030
MOBILETRON	VR-D674
WAI / TRANSPO	DE605




HD608

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.6V

REFERENCES..

DELCO	94648534
DELCO	1116433
WAI / TRANSPO	DE608
MOBILETRON	VR-D690




HD609

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.8V

REFERENCES..

DELCO	21226043
MAGNETI MARELLI	940038033
WAI / TRANSPO	DE609
MOBILETRON	VR-D671C



HD606

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

DELCO	0986192015
MOBILETRON	VR-D673C
MAGNETI MARELLI	940038032
WAI / TRANSPO	D673/DE606




HD403

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.7V

REFERENCES..

YUNYI	13100100/01-001
WAI / TRANSPO	D403
MOBILETRON	VR-D276
WOODAUTO	VRG36289




HD408

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.6V

REFERENCES..

MOBILETRON	VR-D675/VR-D675H
WAI / TRANSPO	D408/D408XHD
KRAUF	ARD2408UT




HD411

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.7V
Soft Start 30 %
Load Response Control-2.5sec.
P-L-I-S
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	310-070/01-013
AS	ARE1003
WAI / TRANSPO	D411
MOBILETRON	VR-D694HD




HDE701

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.80 V

REFERENCES..

YUNYI	13100300 / 01-004
WAI / TRANSPO	DE701
AS	ARE1005
MOBILETRON	VR-D701




HD702

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.7V
Soft Start 30 %
LRC 2.5 sec
Under Voltage Indication
Over Voltage Indication Terminal
Identification:P-L-I-S

REFERENCES..

YUNYI	13100600/01-008
WAI / TRANSPO	D702
AS	ARE1004
MOBILETRON	VR-D702H




HD705

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.70 V
Soft Start 30 %
LRC 2.5 sec
Under / Over Voltage Indication
DFM Function

REFERENCES..

YUNYI	1310050/01-007
WAI / TRANSPO	D705-1
AS	ARE1033
MOBILETRON	CQ1010502



HD708

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HD708
AS	ARE1006
GM	10493240
WAI / TRANSPO	DE708/DE708HD




HD937

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.55 V

REFERENCES..

YUNYI	13110500/01-037
WAI / TRANSPO	D910
AS	ARE1020
MOBILETRON	VR-D271




HD940

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.60 V

REFERENCES..

YUNYI	13110700/01-054
WAI / TRANSPO	D940
AS	ARE1025
MOBILETRON	VR-D740




HD941

FEATURES:
Regulation: A -Circuit
Voltage Set Point 14.5 V

REFERENCES..

WAI / TRANSPO	D941
AS	ARE1020
MOBILETRON	VR-D271
DAEWOO	93740796




HD940-1

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.60 V

REFERENCES..

GPD	HD940-1
DAEWOO	93740797




HD1621

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.4 V
S-IG-L Terminals
2.5 sec. LRC

REFERENCES..

WAI / TRANSPO	ID1621
DEICO	JFZ1621-530
DEICO	MH-D1621
MOBILETRON	VR-Y002




HD1621A

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.5 V

REFERENCES..

GPD	HD1621A
OEM NO :	JFZ193-600




HD1723

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.5V

REFERENCES..

GPD	HD1723
OEM NO :	JFZ1723（75/100A）




HD2022

FEATURES: Regulation:B-Circuit
RVC=0 Vset=13.80V
RC=70% Vset=14.45V
RVC Regulator

REFERENCES..

YUNYI	13150200 / 01-065
WAI / TRANSPO	D2022
AS	ARE1054
MOBILETRON	VR-D583




HD2023

FEATURES: Regulation:B-circuit
RVC=0 Vset=13.80V
RC=70% Vset=14.45V
Soft Start 18.75 %
LRC 2.5 sec
DFM function
RVC Regulator

REFERENCES..

YUNYI	13150500
WAI / TRANSPO	D2023
AS	ARE1056
MOBILETRON	VR-D580




HD2024

FEATURES: Regulation:B-Circuit
RVC=0 Vset=13.80V
RC=70% Vset=14.45V
Soft Start 18.75 %
LRC 2.5 sec
DFM function
RVC Regulator

REFERENCES..

YUNYI	13150100 / 01-063
WAI / TRANSPO	D2024
AS	ARE1053
MOBILETRON	VR-D186



HD2025

FEATURES: Regulation: A -Circuit
Voltage Set Point 14.5 V
Soft Start 18%
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

WAI / TRANSPO	D2025
YUNYI	1313CV00
AS	ARE1063S
MOBILETRON	VR-D502




HD2198

FEATURES: Regulation: A -Circuit
Voltage Set Point 14.3 V
D-IG-L-P Terminals

REFERENCES..

WAI / TRANSPO	D2198
YUNYI	13130600/01-023
AS	ARE1026
NUMBER	220198-8C-28




HD2206

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13130500/01-021
AS	ARE1041
WAI / TRANSPO	D2206
MOBILETRON	VR-D717




HD2206A

FEATURES: Regulation:B-Circuit
Voltage Set Point 14.70 V Soft Start 30 %
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
Self Exciting Function

REFERENCES..

YUNYI	13130200 / 01-019
UTM	RD2019A
ZAUFER	310N10427Z
KRAUF	ARD2206AD




HD2206B

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.6 V
NA-IG-L Terminals

REFERENCES..

YUNYI	13130300 / 01-020
WAI / TRANSPO	D2262
AS	ARE1040
MONBILETRON	VR-D716




HD2207

FEATURES: Regulation: A -Circuit
Voltage Set Point 14.5 V
Soft Start 18%
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

WAI / TRANSPO	D2025
YUNYI	1313CV00
DELCO	220116
MOBILETRON	VR-D502

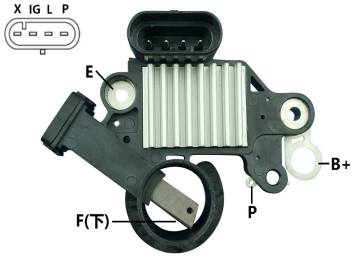


HD1756

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.5V
L-IG Terminal

REFERENCES..

GPD	HD1756
DECO	JFZ1728发电机




HD1955

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.5V

REFERENCES..

GPD	HD1955




HD3579

FEATURES: Regulation: B - Circuit
Voltage Set Point 14.80V
S-F-L-P Terminals
Soft Start 2.5 sec. LRC

REFERENCES..

WAI / TRANSPO	D3579
YUNYI	13113900
AS	ARE1072S
MOBILETRON	VR-D579H




HD1726

FEATURES: Regulation:A-Circuit
Voltage Set Point14.5V
L-IG Terminal

REFERENCES..

GPD	HD1726
DECO	JFZ1726
DECO	JFZ193-1




HD1904

FEATURES: Regulation:B-Circuit
Voltage Set Point 14.50V
Soft Start 12.5% LRC 2.5 Sec
Field Shorted Circuit Protection
Under/Over Voltage Indication
L Terminal Drives Choke

REFERENCES..


YUNYI	13452600
FIT UNIT	ALB0499LP
MOBILETRON	VR-B732
BOSCH	F000BL0118



HD08-29

FEATURES: Regulation:B-Circuit
Voltage Set Point 14.50 V Soft Start 30 %
Field, Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
L Terminal Drives Choke
DFM Function

OEM NO :	
GPD	HD08-29




HD3587

FEATURES: Regulation: B-Circuit
Voltage Setpoint: 13.8 V
Terminal Identification: F-L • Vset controlled by vehicle RVC system
RVC Regulator

REFERENCES..

YUNYI	13140100 / 01-049
WAI/TRANSPO	D3587
AS	ARE1043
MOBILETRON	VR-D755




HD4152

FEATURES: Regulation: B - Circuit
Voltage Set Point 14.40 V
Soft Start 30 %
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication DFM Function
Self Exciting Function

REFERENCES..


WAI / TRANSPO	D4152
YUNYI	13110100/01-005
AS	ARE1032
FIT UNIT	M2710051



HD200

FEATURES: Regulation:B-Circuit
Voltage Set Point 14.70 V
Soft Start 30 %
LRC 5 sec
Field Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFM function

OEM NO :	
WAI	D200
ASE	ARE1027
CQ	CQ1010160
MOBILETRON	VR-D235




HD503

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HD503



HD1054

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..

DEICO	10542172
YUNYI	1313FZ00



HD2206D

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..

YUNYI	13130200/01-019
DEICO	96627029
KRAUF	ARD0118AD



HD2206C

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

DELCO	96408588
DELCO	3140085Z00
MOBILETRON	VR-D715
AS	ARE1077S



HD2198B

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.3V

REFERENCES..

YUNYI	13130900
WAI / TRANSPO	D2198
DEICO	19020209
KRAUF	ALD7209LP



HD2210A

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.7V

REFERENCES..

KRAUFGPD	ALD7711BS
OEM NO :	A6T11540202
ZAUFER	310N10071Z
YUNYI	1313E800



HD2024A

FEATURES: Regulation:B-Circuit
Voltage Set Point: 13.8V

REFERENCES..

YUNYI	13150800
AS	ARE1068S
OPEL UNIT	1202190
FIT UNITS	222732



HD5009

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14V

REFERENCES..

GPD	HD5009



HD5372

FEATURES: Regulation:A-Circuit
Voltage Set Point:28.2V

REFERENCES..

GPD	HD5372



HD200B

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.5V

REFERENCES..

GPD	HD200B



HD201

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.6V

REFERENCES..

DELCO	10494747
MOBILETRON	VR-D747HD
WAI / TRANSPO	D201XHD



HD202

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.2V

REFERENCES..

YUNYI	13110600/01-039
DELCO	10458201
MOBILETRON	VR-D233A
AS	ARE1028




HD8052

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.3V

REFERENCES..

DELCO	10532951
DELCO	8400306
YUNYI	13140600



HD8053

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.3V

REFERENCES..

GPD	HD8053



HD8051

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..

ZAUFER	310N10831Z
DELCO UNIT	8400224
DELCO	10544595
YUNYI	13140700




HD8061

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HD8061



HD8062

FEATURES: Regulation:B-Circuit
Voltage Set Point: 28.5V

REFERENCES..

YUNYI	13114400
DELCO	10522893
LESTER	20406
FIT UNIT	8600498



HD8063

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..

YUNYI	
WAI / TRANSPO	
DEICO	
KRAUF	



HD1334

FEATURES: Regulation:B-Circuit
Voltage Set Point: 28V

REFERENCES..

YUNYI	13180700
DELCO	10527711
WAI / TRANSPO	D1334
UTM	RD9299B



HD1332

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..

DELCO	10521332
YUNYI	13180500
MOBILETRON	VR-D720
WAI / TRANSPO	D1332



HD3588

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..

WAI / TRANSPO	D3588
AS	ARE1030
CAEGO	331774
YUNYI	13140300/01-051



HD7637

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.1V

REFERENCES..

FIT UNITS	8600566
LESTER	12738
ZAUFER	310N10569Z
YUNYI	13170100



HD3579B

FEATURES: Regulation:B-Circuit
Voltage Set Point: 28.2V

REFERENCES..

GPD	HD3579B



HD1951

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HD1951



HD9232

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..

HYUNDAI	3737003800
HYUNDAI	3737003805
HYUNDAI	8400339
KRAUF	ARD9232KR



HD8081

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.7V

REFERENCES..

UTM	RD0500A
DELCO	8600127
DELCO	18700018
YUNYI	13140500



HD8091

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.6V

REFERENCES..

DELCO	F000BL0730
DELCO	8400280



HD1750

FEATURES: SPECS:12 Volt, B-Circuit, L-FR Terminals, 14.9 Vset
SPECS FOR:Delco LT744 Series 190A/12V Liquid Cooled Alternators

REFERENCES..

MOBILETRON	VR-D745
WAI / TRANSPO	DE1750
YUNYI	13160100/01-055
DELCO	236563



HD7806

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HD7806



HD810

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HD810



HD1650

FEATURES: SPECS:12 Volt, B-Circuit, L-FR Terminals, 14.3 Vset
SPECS FOR:Delco LT744 Series 190A/12V Liquid Cooled Alternators

REFERENCES..

GPD	HD518
WAI / TRANSPO	DE1650




HD1753

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

YUNYI	S34-002/13132502
UTM	RQ9342A/RQ9342B
CHERY	S111MV3701111BA
KRAUF	ARQ9342AD




HD2360

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.5V

REFERENCES..

UTM	RQ9016A
ZAUFER	310N11022Z




HD1726-1

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.2V

REFERENCES..

YUNYI	13132302/33-070




HD1952

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HD1952

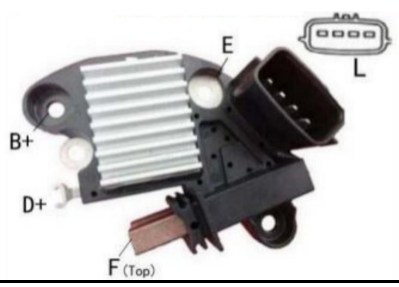

HD4686

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

	61004686
GPD	HD4686




HD5491

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.3V

REFERENCES..

MOBILETRON	VR-D291
UTM	RD5660A
ZAUFER	310N10401Z
HYUNDAI	373002F300

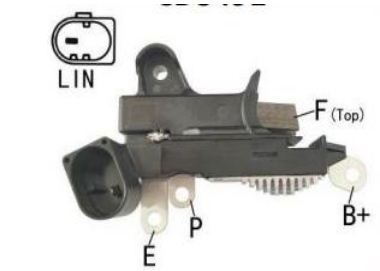


HD5470

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..

YUNYI	13104300
LESTER	21548
FIT UNIT	373002A900
ZAUFER	310N10954Z

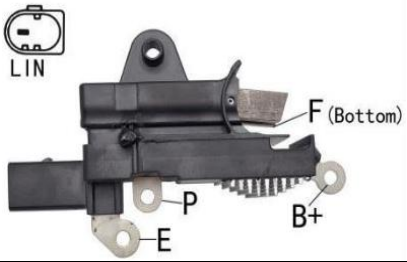


HD2298

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..

MOBILETRON	VR-D298
YUNYI	13103100
WAI / TRANSPO	D2298
VOLTAG	ARD3730

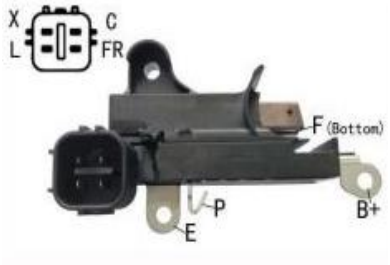

HD320

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..

MOBILETRON	VR-D299
YUNYI	13103210
DELCO	8400320
HYUNBAI	37300-2E700




HD1916

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.3V

REFERENCES..

GPD	HD1916



HDE1338

FEATURES: Regulation:B-Circuit
Voltage Set Point: 28.5V

REFERENCES..

DELCO	10501338
WAI / TRANSPO	DE1338
MERCEBES-BENZ	011154860280
YUNYI	13113700



HD513

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..

YUNYI	S34-033/13134302



HD5013

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HD5013




HD1950

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

DELCO	JFZ1992
YUNYI	13102102
UTM	RQ9340A
KRAUF	ARQ9340AD



HD1756

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

DELCO	JFZ1756
YUNYI	S34-015/13133002
UTM	RQ9345A



HRR1757

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HRR1757




HD970

FEATURES: Voltage Set Point:14.3V
Regulation:B-Circuit

REFERENCES..

GPD	HD970
DAEWOO	202.052.001




HD8001

FEATURES: Regulation:A-Circuit
Voltage Set Point 24 V

REFERENCES..

GPD	HD8001
OEM NO :	FTD2504E




HB2568

FEATURES: Regulation:B-Circuit
Voltage Set Point 28.30 V Soft Start 30 %
Field Shorted Circuit Protection
Under/ Over Voltage Indication L Terminal
Drive Choke

REFERENCES..

GPD	HB2568




HD9716

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5 V

REFERENCES..

GPD	HD9716
UTM	RD9005A
USI	71-10059




HD8003

FEATURES: Regulation:A-Circuit
Voltage Set Point 28.30 V

REFERENCES..

GPD	HD8003
OEM NO :	FTD245G




HD8005

FEATURES: Regulation:A-Circuit
Voltage Set Point 28.3 V

REFERENCES..

GPD	HD8005
OEM NO :	FTD245B




HD9758

FEATURES: Regulation:A-Circuit
Voltage Set Point 28.45V

REFERENCES..

YUNYI	13130700 / 01-038
AS	ARE1042
UTM	RD2038A
ELECTROLOG	REG2007i




HF540

FEATURES: Regulation:B-Circuit
Voltage Set Point 14.3v

REFERENCES..

WAI / TRANSPO	F540/F540XHD
FORD	D9PZ10316A
MOTORCRAFT	GR540
MOTORCRAFT	GR-540A




HF600

FEATURES: Regulation: A -Circuit
Voltage Set Point 14.5 V
S-D-L Terminals
L Terminal Does not Drive Choke
Gray Cover

REFERENCES..

WAI / TRANSPO	F600
YUNYI	13220100/02-003
AS	ARE9015
MOBILETRON	VR-F900




HF601

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.0V
LI-RC-S Terminals
PMC control

REFERENCES..

YUNYI	13220600 / 02-011
WAI / TRANSPO	F601
AS	ARE9033
MOBILETRON	VR-F910




HF602

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.4V
Soft Start 30 %
LRC 5 sec
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13220800 / 02-016
WAI / TRANSPO	F602
AS	ARE9016
MOBILETRON	VR-F920




HF603

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.45 V
Soft Start 30 % LRC 5 sec
Under Voltage Indication
Over Voltage Indication
White with Orange Cover

REFERENCES..

YUNYI	13220200 / 02-004
WAI / TRANSPO	F603
AS	ARE9017
MOBILETRON	VR-F930




HF605

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.45 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
Gray with Green Cover

REFERENCES..

YUNYI	13220400 / 02-007
WAI / TRANSPO	F605
AS	ARE9038
MOBILETRON	VR-F901




HF606

FEATURES: Regulation: A-Circuit
Voltage Set Point 14.4 V
Soft Start 30 % LRC 5 sec
Field, Lamp Shorted Circuit Protection
Sense Loss Indication
Under Voltage Indication
Over Voltage Indication DFM function
Black with Black Cover

REFERENCES..

WAI / TRANSPO	F606
YUNYI	13220900/02-017
AS	ARE9034
MOBILETRON	VR-F931




HF610

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.30 V
Soft Start 30 %
Field, Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13230200/02-013
WAI/TRANSPO	F610
AS	ARE9035
MOBILETRON	VR-VN002



HF611

FEATURES: Regulation: A -Circuit
Voltage Set Point 13.8V

REFERENCES..

YUNYI	13230100/02-012
WAI / TRANSPO	F611
AS	ARE9026
MOBILETRON	VR-VN001




HF784B

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.6V

REFERENCES..

YUNYI	13200500 / 02-014
WAI / TRANSPO	F784B
AS	ARE9009
MOBILETRON	VR-F786BH




HF794

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

YUNYI	13200800/02-0021
WAI / TRANSPO	F794
AS	ARE9005
MOBILETRON	VR-G36272




HF794B

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

YUNYI	13200100 / 02-001
WAI / TRANSPO	F794
AS	ARE9011
MOBILETRON	VR-F786H




HF796

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.45 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13210100 / 02-005
WAI / TRANSPO	F796
AS	ARE9013
MOBILETRON	VR-F815




HF797

FEATURES: Regulation: A -Circuit
Voltage Set Point 14.0 V
LI-RC-AS Terminals
Regulated Voltage Control(RVC)

REFERENCES..

WAI / TRANSPO	F797
YUNYI	13210300/02-018
AS	ARE9039
MOBILETRON	VR-F822




HF798

FEATURES: Regulation: A -Circuit
Voltage Set Point 14.45 V
Field Shorted Circuit Protection
Over Voltage Indication

REFERENCES..

WAI / TRANSPO	F798
YUNYI	13210200/02-006
AS	ARE9014
MOBILETRON	VR-F817




HF784

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.6V

REFERENCES..

WAI / TRANSPO	F784
AS	ARE9003
MOBILETRON	VR-F784H
REAL	20550301BN



HF785

FEATURES: Regulation: A -Circuit
Voltage Set Point：14.6V

REFERENCES..

FORD	F3AU10316AA
FORD	F3AZ10316A
MOBILETRON	VR-F811
YUNYI	SQFDR785




HF786

FEATURES: Regulation: A -Circuit
Voltage Set Point：14.6V

REFERENCES..

MOBILETRON	VR-F818
AS	ARE9010
WAI / TRANSPO	F786
YUNYI	13200300/02-009




HF795

FEATURES: Regulation: A -Circuit
Voltage Set Point：14.6V

REFERENCES..

WAI / TRANSPO	F795
AS	ARE9012
MOBILETRON	VR-F814
YUNYI	13200400-02-010




HH022A

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.5 V

REFERENCES..

GPD	HH022A




HH028

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.70 V

REFERENCES..

YUNYI	13521000/05-028
AS	ARE2045
CQ	CQ1010139
MOBILETRON	VR-H2000-36

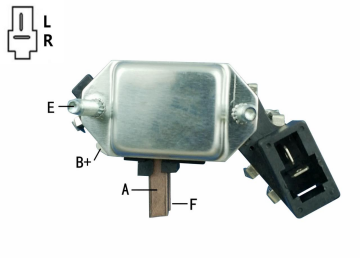


HH107

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.45 V
Soft Start 30 %
Field Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13503700 / 05-107
NISSAN	23215ED300
MOBILETRON	VR-H2000-87
FIT UNIT	ALH3281RN




HH203

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.3V

REFERENCES..

YUNYI	13523300 / 05-076
MOBILETRON	VR-H2000-37
MEGNETI MARE	AMP0246
BOSCH	986192028

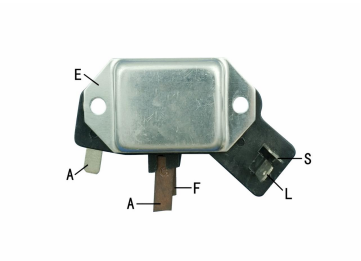


HH204

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.70 V

REFERENCES..

YUNYI	13530200 / 05-027
WAI / TRANSPO	IH204
AS	ARE2044
HITACHI	LR15078B




HH205

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V
S-L Terminals

REFERENCES..

YUNYI	13520300 / 05-007
WAI / TRANSPO	IH205
AS	ARE2040
MOBILETRON	VR-H2000-30




HH205A

FEATURES: Voltage Set Point:14.6V
Regulation:A-Circuit

REFERENCES..

YUNYI	13522100 / 05-046
HITACHI	L15023156
NISSAN	2313380W01
FIT UNIT	ALH0754UX

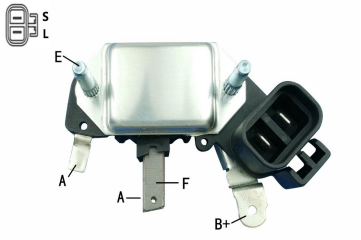


HH242

FEATURES: Voltage Set Point:14.3V
Regulation:A-Circuit

REFERENCES..

WAI / TRANSPO	IH242
AS	ARE2012
MOBILETRON	VR-H2000-5H
POWERMAX	81116165




HH249

FEATURES: Regulation:A-Circuit
Voltage Setpoint: 14.6 V
Terminal Identification: S-Lterminals

REFERENCES..

WAI / TRANSPO	IH249
AS	ARE2023
CQ	CQ1010199
MOBILETRON	VR-H2000-20




HR1552-R

FEATURES:
Regulation: A -Circuit
Voltage Set Point 14.5 V

REFERENCES..

GPD	HR1552-R




HH251

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.5V
S-IG-L Terminals

REFERENCES..

WAI / TRANSPO	IH251
YUNYI	05-101
MOBILETRON	VR-H2000-24
HITACHI	GD002642-A




HH252

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.3V
S-IG-L

REFERENCES..

YUNYI	13522200 / 05-048
WAI / TRANSPO	IH252
AS	ARE2004
MOBILETRON	VR-H2000-29

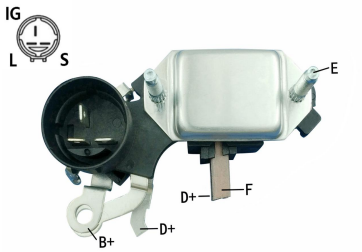


HH253

FEATURES:
Regulation:A-Circuit
Voltage Set Point:28.2V
For regulator only use IH716.

REFERENCES..

YUNYI	13520600 / 05-012
WAI / TRANSPO	IH253
AS	ARE2005
MOBILETRON	VR-H2000-29B




HH254

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.5V
S-L-W-IG Terminals

REFERENCES..

YUNYI	13522500 / 05-056
WAI / TRANSPO	IH254
AS	ARE2006
MOBILETRON	VR-H2000-47




HR1302

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.40 V
Soft Start 30 %
Field Shorted Circuit Protection
Under/ Over Voltage Indication
Sense Open Indication

REFERENCES..

YUNYI	13501400 / 05-042




HH711

FEATURES:
Regulation: A - Circuit
Voltage Setpoint: 14.3 V
S-L Terminals

REFERENCES..

WAI/TRANSPO	IH711
AS	ARE9090
MOBILETRON	VR-K05
POWERMAX	81119871




HR1352-R

FEATURES:
Regulation:A-Circuit
Voltage Set Point 28.40 V
Soft Start 30 %
Field Shorted Circuit Protection
Sense Open Indication
Under/ Over Voltage Indication

REFERENCES..

YUNYI	13500700 / 05-016
WAI / TRANSPO	IH786
AS	ARE2033




HH739

FEATURES:
Regulation:A-Circuit
Voltage Set Point: 14.4V

REFERENCES..

GPD	HH739




HH737

FEATURES:
Regulation: A -Circuit
Voltage Set Point 14.4 V
Soft Start 30 % LRC 10 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

WAI / TRANSPO	IH737
YUNYI	05-112/350-410
AS	ARE2065
MOBILETRON	VR-H2000-45




HH738

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.40 V
Soft Start 30 %
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13500100 / 05-001
AS	ARE2025
MOBILETRON	VR-H2000-44
POWERMAX	81116083




HH741

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.30 V
Soft Start 26 % LRC 4 sec
Vset of "C" is controlled by duty cycle

REFERENCES..

YUNYI	13503000/05-096
WAI/TRANSPO	IH741
AS	ARE2072
MOBILETRON	VR-H2000-73




HH742

FEATURES:
Regulation:B-Circuit
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFM Function Self exciting function

REFERENCES..

YUNYI	13501300 / 05-041
WAI / TRANSPO	IH742
AS	ARE2062
MOBILETRON	VR-H2000-63




HH744

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.40 V
Soft Start 30 %
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13501800 / 05-054
WAI / TRANSPO	IH744
AS	ARE2038
MOBILETRON	VR-H2000-62




HH748

FEATURES:
Regulation: A -Circuit
Voltage Set Point 14.4 V

REFERENCES..

WAI / TRANSPO	IH748
HITACHI UNIT	LR1110-501
HITACHI UNIT	LR1110-501BAM
ISUZU UNIT	8-97967-301-1




HH758

FEATURES:
Regulator for Hitachi on Mazda Miata
PD Regulator

REFERENCES..

YUNYI	13503900 / 05-109
WAI / TRANSPO	IH758
AS	ARE2063
MOBILETRON	VR-H2000-51




HH761

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.40 V
Over Voltage Indication

REFERENCES..

YUNYI	13510100 / 05-052
WAI / TRANSPO	IH761
AS	ARE2015
MOBILETRON	VR-H2000-16




HH762

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.3V

REFERENCES..

YUNYI	13510200 / 05-088
AS	ARE2022
WOODAUTO	VRG46833
MOBILETRON	VR-H2000-18




HH765

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 30 %
Under/ Over Voltage Indication

REFERENCES..

YUNYI	13500900 / 05-025
WAI / TRANSPO	IH765
HITACHI	LR180-742
MOBILETRON	VR-H2000-27

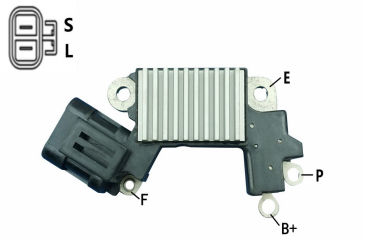


HH766

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 30 %
Under/ Over Voltage Indication

REFERENCES..

YUNYI	13500300 / 05-008
WAI / TRANSPO	IH766
AS	ARE2011
MOBILETRON	VR-H2000-28




HH767

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 30 %
Under/ Over Voltage Indication

REFERENCES..

YUNYI	13501600 / 05-047
WAI / TRANSPO	IH767
AS	ARE2017
POWERMAX	81113568
MOBILETRON	VR-H2000-38




HH769

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 30 %
Under/ Over Voltage Indication
W-L Terminals

REFERENCES..

YUNYI	13503100 / 05-099
WAI / TRANSPO	IH769
AS	ARE2008
MOBILETRON	VR-H2000-50

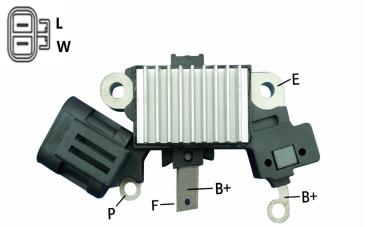


HH774

FEATURES:
Regulation: A - Circuit
Voltage Set Point 14.4 V
S-L Terminals

REFERENCES..

WAI / TRANSPO	IH774
AS	ARE2019
MOBILETRON	VR-H2000-46
CQ	CQ1010102




HH776

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 30 %
Under/ Over Voltage Indication

REFERENCES..

YUNYI	13500200 / 05-004
AS	ARE2009
CASCO	CRE20105AS
MOBILETRON	VR-H2000-41




HH784

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.5 V

REFERENCES..

YUNYI	13509400
WAI/TRANSPO	IH784
MOBILETRON	VR-H2000-72
HITACHI	L1401315

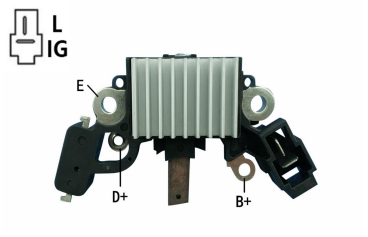


HH785

FEATURES:
Regulation: A -Circuit
Voltage Set Point 28.5 V
L Terminal
Soft Start
Short Circuit Protection

REFERENCES..

WAI / TRANSPO	IH785
YUNYI	05-037
MOBILETRON	VR-H2000-76B
HITACHI	LR250-517




HH7249

FEATURES:
Regulation: A - Circuit
Voltage Set Point 14.5 V

REFERENCES..

GPD	HH7249
YUNYI	13501500/05-043



HH716

FEATURES: Regulation: A -Circuit
Voltage Set Point 28.5 V
B-S-R-L-F-E Terminals

REFERENCES..

WAI / TRANSPO	IH716
AS	ARE2007
MOBILETRON	VR-H2000-3A
CQ	CQ1010714



HH717

FEATURES: Regulation: A -Circuit
Voltage Set Point 14.3 V
B-S-R-L-F-E Terminals

REFERENCES..

WAI / TRANSPO	IH717
AS	ARE2003
MARELLI	940038080
HITACHI	L150-23155




HH708

FEATURES: Regulation: A -Circuit
Voltage Set Point 28.3 V
R-L-F-C-E Terminals

REFERENCES..

WAI / TRANSPO	IH708
YUNYI	05-060/13531400
AS	ARE2051
MOBILETRON	VR-H2001-3



HH707

FEATURES: Regulation:A-Circuit
Voltage Set Point:28.5V

REFERENCES..

NISSAN	2350099008
WAI/TRANSPO	IH707
MOBILETRON	VR-H2000-2B
CARGO	135026



HH215

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.2V

REFERENCES..

WAI/TRANSPO	IH215
NISSAN	2350099010
MOBILETRON	VR-H2000-2
CARGO	132434




HH210

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

NISSAN	23125F2500
HITACHI	TR1Z27/TR1Z33
AS	ARE2002
MOBILETRON	VR-H2000-1



HH212

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.3V
For heavy duty version use
IH717

REFERENCES..

YUNYI	13547400 / 05-021
WAI / TRANSPO	IH212
AS	ARE2003
MOBILETRON	VR-H2000-3



HH254 24V

FEATURES: Regulation:A-Circuit
Voltage Set Point:28V

REFERENCES..

GPD	HH254




HH205B

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.4V

REFERENCES..

HITACHI	L2259315
NISSAN	23528C8601
AS	ARE2035
YUNYI	S05-032/13521300



HH782

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

HITACHI	L170G6315
NISSAN	232150W400
MOBILETRON	VR-H2000-43
YUNYI	S05-047/13501600



HH782BH

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HH782BH




HH728

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28V

REFERENCES..

MOBILETRON	VRH200080B
HITACHI	LR250508
HITACHI	LR250707
HITACHI	89718605511

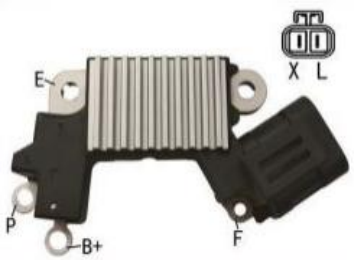


HH728BH

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28V

REFERENCES..

YUNYI	S05-103/13503300
MOBILETRON	VR-H2000-80BA
HITACHI	8980750260
AS	ARE2059




HH783

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

HITACHI	LR180509
ISUZU	2902768100
MOBILETRON	VR-H2000-56
WAI / TRANSPO	IH783



HH767BH

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HH767BH




HH767

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HH767

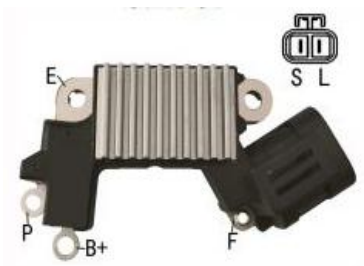


HH767BH-L

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HH767BH-L




HH760

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.6V

REFERENCES..

HITACHI	L17033152
AS	ARE2014
WAI / TRANSPO	IH760
MOBILETRON	VR-H2000-14



HH669

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

HITACHI	LR1100507
AS	ARE2032
MOBILETRON	VR-H2000-64
YUNYI	S05-053/13501700




HH670

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.4V

REFERENCES..

YUNYI	S05-099/13503100



HH743

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.3V

REFERENCES..

MOBILETRON	VRH200073
WAI / TRANSPO	IH743
YUNYI	13509000
HITACHI	LR1110724



HH775

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.3V

REFERENCES..

GPD	HH775




HH746

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.4V

REFERENCES..

NISSAN	231241A965
MOBILETRON	VR-H2000-85
WAI / TRANSPO	IH746
YUNYI	S05-091/13502700



HH238

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

HITACHI	L1903315
NISSAN	2310085
WAI / TRANSPO	IH238
MOBILETRON	VR-H2000-4H



HH711BH

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

AS	ARE2058
CARGO	235522
POWERMAX	81119871
PACIFIC	67-007




HH711

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

SUBARU	23815AA050
KIA	0K01218300
MOBILETRON	VR-H2000-52
WAI / TRANSPO	IH768




HH740

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.4V

REFERENCES..

UTM	RH5057A
UTM	2310072B01
MOBILETRON	VR-H2000-57
YUNYI	S05-065/13502100

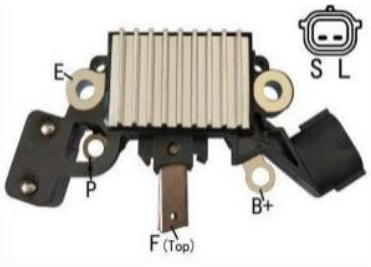

HH247

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

HITACHI	GD211509A
MOBILETRON	VR-H2000-15




HH772

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.6V

REFERENCES..

WAI / TRANSPO	IH772
MOBILETRON	VR-H2000-4H



HH747

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.30 V
Soft Start 26 % LRC 4 sec
Vset of "C" is controlled by

REFERENCES..

WAI / TRANSPO	IH747
MOBILETRON	



HH111

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.3V

REFERENCES..

NISSAN	23142ED300
HITACHI	LR1140803
MOBILETRON	VR-H2000-91
YUNYI	S05-111/13504000



HR1351-R

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.7V

REFERENCES..

KRAUF	ARH5024AD
WAI / TRANSPO	255713W
YUNYI	S05-024/13506500
AS	ARE2034



HH207

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

GPD	HH207



HH208

FEATURES: Regulation:A-Circuit
Voltage Set Point:28.5V

REFERENCES..

YUNYI	S05-005/13520100



HH201

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.3V

REFERENCES..

HITACHI	L135N13151
MITSUBISHI	A001T24571
WAI / TRANSPO	IH201
MOBILETRON	VR-H2000-31



HH203-1

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.4V

REFERENCES..

GPD	HH03-1




HH262

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.4V

REFERENCES..

KRAUF	ALM9100LP
KRAUF	ARQ1413LP



HH263

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

YUNYI	S33-040/13523902
UTM	RQ9740A
ZAUFER	310N10981Z



HH264

FEATURES: Regulation:A-Circuit
Voltage Set Point:28V

REFERENCES..

GPD	HH264



HH265

FEATURES: Regulation:A-Circuit
Voltage Set Point:28.4V

REFERENCES..

UTM	RQ8335A
ZAUFER	310N11046Z



HH5542

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.5V

REFERENCES..

MOBILETRON	170750
WAI / TRANSPO	MP300
DESCO	1E32215G01
DESCO	ALG2565UX



HH554

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

YUNYI	S33-037/13523602
KRAUF	ARQ8111AD
MOBILETRON	9RC2106
UTM	RQ8111A



HH654

FEATURES: Regulation:A-Circuit
Voltage Set Point:28.5V

REFERENCES..

YUNYI	S33-041/13524002
UTM	RQ9741A
ZAUFER	310N10751Z




HH1054

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

UTM	RQ9713A
ZAUFER	310N10939Z



HH5541

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.5V

REFERENCES..

GPD	HH5541




HH5546

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.7V

REFERENCES..

YUNYI	S05-002/13506700
KRAUF	ARH5002
UTM:	RH5002A
ZAUFER	310N11056Z



HH240

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.7V

REFERENCES..

CARGO	135029
HITACHI	L1706315
MOBILETRON	VR-H2000-13
WAI / TRANSPO	IH240



HH258

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.4V

REFERENCES..

WAI / TRANSPO	IH258
HITACHI	LR140-708
HITACHI	31105MN5005



HH246

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

CARGO	135020
HITACHI	L1655315
MOBILETRON	VR-H2000-19
WAI / TRANSPO	IH246




HR1354-R

FEATURES: Regulation:A-Circuit
Voltage Set Point 28.60 V

REFERENCES..

YUNYI	13506600 / 05-003
AS	ARE2060
GAUSS	GA904
MOBILETRON	VR-H2000-86B



HH248

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.3V

REFERENCES..

HITACHI	L1808315
MOBILETRON	VR-H2000-17
AS	ARE2013
WAI / TRANSPO	IH248




HR2223

FEATURES:
A-Circuit
Voltage Set Point 14.60V
Soft Start 18% LRC 2.5 Sec
Field Shorted Circuit Protection
Sense Open Indication
Under/Over Voltage Indication

REFERENCES..

YUNYI	1350F000



HK401

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.6V

REFERENCES..

WAI / TRANSPO	IK401
AS	ARE9007
CQ	CQ1010058
MOBILETRON	VR-B193N




HK404

FEATURES: Regulation:A-Circuit
Voltage Set Point:28.0V

REFERENCES..

YUNYI	1341A910
WAI / TRANSPO	IK404
AS	ARE9065S
MOBILETRON	VR-IK029




HK543

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.4V

REFERENCES..

YUNYI	1341A600
WAI / TRANSPO	IK543
AS	ARE9008
MOBILETRON	VR-IK149



HK700

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.5V

REFERENCES..

WAI / TRANSPO	IK700




HK584

FEATURES: Regulation:B-Circuit
Voltage Set Point 28.00 V

REFERENCES..

GPD	HK584




HK585

FEATURES: Regulation:B-Circuit
Voltage Set Point:12V

REFERENCES..

MOBILETRON	VR-B212
REFERENCES..	9120450077
REFERENCES..	9120450085
REFERENCES..	9190457006




HY028

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

WAI / TRANSPO	IY028
AS	ARE5044
CQ	CQ1010634
MOBILETRON	VR-MD06




HY058

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

YUNYI	13604100 / 06-067
WAI / TRANSPO	IY058
AS	ARE9006
MOBILETRON	VR-H2009-86




HY094

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

YUNYI	13603900 / 06-065
WAI / TRANSPO	IY094
AS	ARE9020
MOBILETRON	MOBILETRON




HY116

FEATURES: Regulation:A-circuit
Voltage Set Point 14.5V
S-L Terminals

REFERENCES..

WAI/TRANSPO	IY116
AS	ARE9096P
HYUNDAI / KIA	G6G20-M023




HY126

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.40 V
DFM Function

REFERENCES..

YUNYI	13620300/06-111
WAI/TRANSPO	IY126
AS	ARE5129
MOBILETRON	VR-H2009-106




HY145

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.4 V
NF-S-L-FR Terminals

REFERENCES..

WAI/TRANSPO	IY145
MOBILETRON	VR-MD08




HY146

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.50 V
DFM Function

REFERENCES..

YUNYI	13620400/06-112
WAI/TRANSPO	IY146
AS	ARE5083
MANDO	AB112145




HY422

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

YUNYI	13601600 / 06-029
WAI / TRANSPO	IY422
AS	ARE9002
MOBILETRON	VR-MD01




HY510

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.6V

REFERENCES..


YUNYI	13604800 / 06-078
WAI / TRANSPO	IY510
AS	ARE9022
MOBILETRON	VR-K04



HY511

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.6V


REFERENCES..
GPD HY511



HY702

FEATURES: Regulation: A -Circuit
Voltage Set Point 14.50 V
S-L Terminals


REFERENCES..
WAI / TRANSPO IY702
YUNYI 06-081/13605000
AS ARE5077
MOBILETRON VR-MD12



HY727

FEATURES: Regulation: A -Circuit
Voltage Set Point 14.4 V
S-L Terminals


REFERENCES..
WAI / TRANSPO IY727
YUNYI 06-056/13603200
AS ARE3079
MOBILETRON VR-H2009-128



HY742

FEATURES: Regulation:A-circuit
Voltage Set Point:14.5V
L-S Terminals


REFERENCES..
WAI / TRANSPO IY742
OEM NO TA500C03101
OEM NO TA500C0310A
OEM NO 37300-35560



HY794

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V


REFERENCES..
YUNYI 13606000 / 06-093
AS ARE5049
GHIBAUDI RTR4023
MOBILETRON VR-H2009-116



HY903

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.2V


REFERENCES..
YUNYI 13604000 / 06-066
WAI / TRANSPO IY903
AS ARE5044
MOBILETRON VR-MD06



HY917-2

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V


REFERENCES..
YUNYI 13640300 / 06-070
WAI / TRANSPO PG101
AS ARE9023
WOODAUTO VRG46911



HY917-3

FEATURES: Regulation:A-Circuit
Voltage Set Point:28.3V

REFERENCES..
YUNYI 13640400 / 06-079
WAI / TRANSPO PG133
NEW-ERA IVR-403
MOBILETRON VR-K01B



HY918

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..
YUNYI 13640100 / 06-068
KIA 62124520



HY919

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..
YUNYI 13640200 / 06-069
WAI / TRANSPO PG104





HRR2006

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

OEM NO	ARR7019KL
OEM NO	7302.3702




HRR2008

FEATURES: Regulation:A-Circuit
Voltage SetPoint 14.50V

REFERENCES..

GPD	HRR2008
OEM NO	7901.3702A3




HRR2012

FEATURES: Regulation:A-Circuit
Voltage Set Point： 14.50V

REFERENCES..

GPD	HRR2012
OEM NO	62.3702




HRR2020

FEATURES: Regulation:A-Circuit
Voltage Set Point： 28.40 V

REFERENCES..

YUNYI	13531000 / 12-012
WAI / TRANSPO	IZ229
AS	ARE9032
NEW-ERA	IVR-606




HRR2024

FEATURES: Regulation:A-Circuit
Voltage Set Point：14.40 V

REFERENCES..

OEM NO	57.3702
OEM NO	21100-3701500-82
OEM NO	2110-3701500



HL680

FEATURES: Regulation.A-Circuit
Voltage Set Point: 28.40V

REFERENCES..

YUNYI	13400900/04-010
LADA NO	612370206
ZAUFER	310N10230Z
VOLTAG	ARR9010




HL702

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5 V

REFERENCES..

LADA	2108-3701500
OEM NO :	04-130
OEM NO :	13404500




HL684

FEATURES: Regulation:B-CircuitVoltage Set Point 14.50 VSoft Start 30% LRC 5 secField Shorted Circuit ProtectionUnder Voltage IndicationOver Voltage IndicationDFM function Self exciting function

REFERENCES..

YUNYI	13402700/04-058
VOLTAG	ARR9058
LADA NO	79303702




HL685

FEATURES: Regulation:B-CircuitVoltage Set Point 14.50 VSoft Start 30% LRC 5 secField Shorted Circuit ProtectionUnder Voltage IndicationOver Voltage IndicationDFM function Self exciting function

REFERENCES..

GPD	HL685



HRR1406

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V


REFERENCES..
GPD HRR1406



HRR1505

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
OEM NO JFZ163/166/172L
YUNYI S31-020/1332A002



HRR8833

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
OEM NO JFZ1928
YUNYI S31-029/1332A402
UTM RQ9629A/ALN4926MQ



HRR1416

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
UTM RQ9282A
ZAUFER 310N10914Z



HRR1407

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
OEM NO JFZ168
YUNYI S30-002/13327002
UTM RQ9282A



HRR1426

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
GPD HRR1426



HRR1410

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V


REFERENCES..
OEM NO JFZ1712
YUNYI S30-001/13326902
UTM RQ9281A
ZAUFER 310N11062Z



HRR1411

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
OEM NO JFZ1658
YUNYI S30-018/13327202
UTM RQ9218A
ZAUFER 310N11057Z

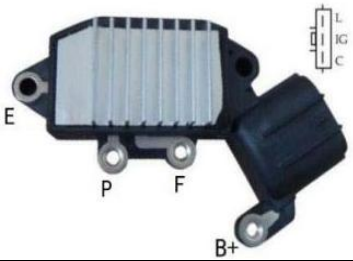

HRR1468

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
OEM NO JFZ168A
YUNYI S30-011/13327102
ZAUFER 310N11040Z



HRR1713

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
OEM NO JFZ1712A
YUNYI S30-021/13327302



HRR1470

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..
GPD HRR1470



HRR1408

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
GPD JFZ1910
YUNYI S31-001/13328102
UTM RQ8311A
ZAUFER 310N10917Z



HRR1405

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
GPD HRR1405



HRR1910

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.4V

REFERENCES..
GPD HRR1910



HRR1911

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.4V

REFERENCES..
GPD HRR1911



HRR0396

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.3V

REFERENCES..
GPD HRR0396



HRR2036

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
YUNYI S34-026/1340AB02




HL112

FEATURES: Regulation: A -Circuit
Voltage Set Point 14.3 V
Inactive Lamp

REFERENCES..

AS	ARE4055S
MOBILETRON	VR-LC112
CQ	CQ1010260
WOODAUTO	VRG47380




HL211

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.3V

REFERENCES..

YUNYI	13010100 / 00-002
WAI / TRANSPO	IL211
AS	ARE4042
CQ	CQ1010063




HL219

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.3V

REFERENCES..

WAI / TRANSPO	IL219
AS	ARE4049
CQ	CQ1010469
MOBILETRON	VR-LC200



HL223

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.4V

REFERENCES..

WAI / TRANSPO	IL223
AS	ARE4001
CQ	CQ1010009
MOBILETRON	VR-LC111




HL225

FEATURES: Regulation: A -Circuit
Voltage Set Point 28.3 V

REFERENCES..

WAI / TRANSPO	IL225
YUNYI	13000200/00-003
AS	ARE4002
MOBILETRON	VR-LC111B




HL218

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

YUNYI	13540800/12-016



HZ226

FEATURES: Regulation:A-Circuit
Voltage Set Point:28.5V

REFERENCES..

ISUZU	1812510040
NIKKO	1440000580
WAI / TRANSPO	IZ226
CARGO	132092




HZ227

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.6V

REFERENCES..

GPD	HZ227



HZ228

FEATURES: Regulation:A-Circuit
Voltage Set Point:29.3V

REFERENCES..

CARGO	135296
MOBILETRON	VRH20032B
NIKKO	0337190031
TRANSPO	IZ228




HX017

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 32 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13711000 / 07-017
WAI / TRANSPO	IX491
AS	ARE4014
MOBILETRON	VR-F157




HX036

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.20 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Sense Open Indication
Under/ Over Voltage Indication
DFM Function

REFERENCES..

YUNYI	13710100 / 07-006
WAI / TRANSPO	IX320
TOYOTA	27060-0D190
DENSO	MS1012100890




HX106

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.2V
Terminal Identification: Red D+, Green DF, Case D-

REFERENCES..

WAI / TRANSPO	IX106
AS	ARE4009
REAL	20504301BN
MOBILETRON	VR-F114A




HX108

FEATURES:
Regulation:A-Circuit
Voltage Set point: 28.1 V

REFERENCES..

LUCAS	21222119 / ULB807
MAGNETI MARE	64808141
TRANSPO	IX108
MOBILETRON	VR-F114B




HX110

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.4V

REFERENCES..

YUNYI	13700100 / 07-001
TRANSPO	IX110
CQ	CQ1010006
MOBILETRON	VR-F119




HX112

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.7V
Dim:50mm lead length

REFERENCES..

TRANSPO	IX 112
HUCO	130793
CARGO	138795
MAGNETI MARE	RTE119AC




HX118

FEATURES:
Regulation:A-Circuit
Voltage Setting 14.5V

REFERENCES..

WAI / TRANSPO	IX118
AS	ARE4007
CQ	CQ1010515
MOBILETRON	VR-F118




HX121

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 32 % LRC 5 sec
Field Shorted Circuit Protection
Under /Over Voltage Indication
Active lamp function-with output Self-exciting

REFERENCES..

YUNYI	13710800 / 07-014
WAI / TRANSPO	IX121
AS	ARE4004
MOBILETRON	VR-F151A




HX122

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.4 V
W/LRC

REFERENCES..

WAI / TRANSPO	IX122
AS	ARE4004
MARELLI	RTM151A
MOBILETRON	VR-F151A




HX123

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.5V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under / Over Voltage Indication
Active lamp function-with output

REFERENCES..

YUNYI	13712200 / 07-032
WAI / TRANSPO	IX123
AS	ARE4005(OEM)
MOBILETRON	VR-F153A




HX127

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.60 V
Soft Start 32 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13720300 / 07-021
WAI / TRANSPO	IX127
HUCO	130796
MOBILETRON	VR-F121T




HX131

FEATURES:
Regulation:A-Circuit
RC=0 Vs=13.50V
RC=55% Vs=14.25V
PCM Regulator

REFERENCES..

YUNYI	13711300 / 07-019
WAI / TRANSPO	IX131
AS	ARE4011
MOBILETRON	VR-F156



HX138

FEATURES:
Regulation:B-Circuit
Voltage Set Point:14.4V
2.5 sec. LRC
W/Short Circuit Protection

REFERENCES..

WAI / TRANSPO	IX138
MOBILETRON	VR-F161




HX595

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.4V
W/Short Circuit Protection

REFERENCES..

WAI / TRANSPO	IX595
MOBILETRON	VR-F159

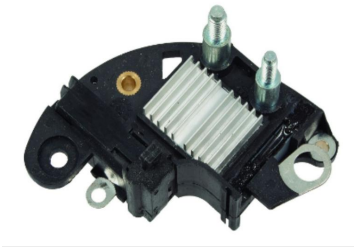

HX111

FEATURES:
Regulation:A-Circuit
L-D+ Terminals
Voltage Set Point:28.3V

REFERENCES..

WAI / TRANSPO	IX111
MOBILETRON	VR-F119B




HIM204

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.6V

REFERENCES..

YUNYI	13610900 / 06-020
AS	ARE5169S
MOBILETRON	VR-H2009
WAI / TRANSPO	IM204

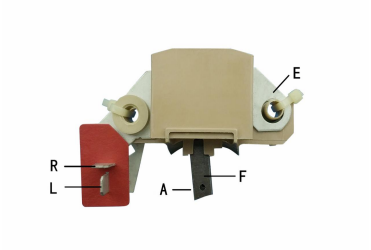


HIM205

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.6V

REFERENCES..

YUNYI	13610300 / 06-009
WAI / TRANSPO	IM205
AS	ARE5002
MOBILETRON	VR-H2009-18

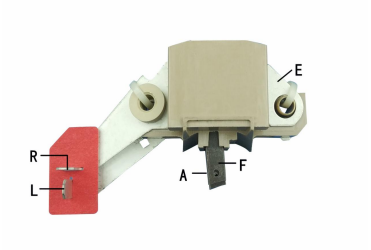


HIM212

FEATURES: Voltage Set Point:28.6V
Regulation:A-Circuit

REFERENCES..

YUNYI	13610500 / 06-011
WAI / TRANSPO	IM212
AS	ARE3173
MOBILETRON	VR-H2009-47

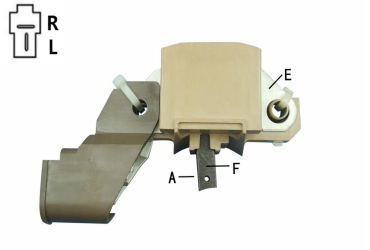


HIM213

FEATURES: A-Circuit
Voltage Set Point 28.50V

REFERENCES..

YUNYI	13610100
MOBILETRON	VR-H2009-12
WAI/TRANSPO	IM1213
AS	ARE5062




HIM216

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

YUNYI	13600100 / 06-001
WAI / TRANSPO	IM216
AS	ARE5004
MOBILETRON	VR-H2009-4A




HIM217

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V
Dim: 26mm

REFERENCES..

YUNYI	13600300 / 06-004
WAI / TRANSPO	IM217
AS	ARE5005S
MOBILETRON	VR-H2009-6H




HIM222

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

YUNYI	13600500 / 06-006
AS	ARE5020
WAI / TRANSPO	IM222
MOBILETRON	VR-H2009-38

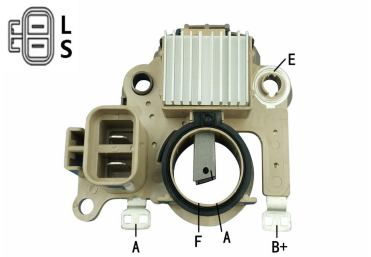


HIM225

FEATURES: Voltage Set Point:14.5V
Regulation:A-Circuit

REFERENCES..

YUNYI	13611700 / 06-049
AS	ARE5032
WAI / TRANSPO	IM225
MOBILETRON	VR-H2009-3




HIM265

FEATURES: Voltage Set Point:14.5V
Regulation:A-Circuit

REFERENCES..

YUNYI	13607700 / 06-118
WAI / TRANSPO	IM265
AS	ARE5011
MOBILETRON	VR-H2009-7H




HIM280

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V
Dim: 26mm ID Slip Ring Cover

REFERENCES..

YUNYI	13601700 / 06-030
WAI / TRANSPO	IM280
AS	ARE5018
FORD	GRE805

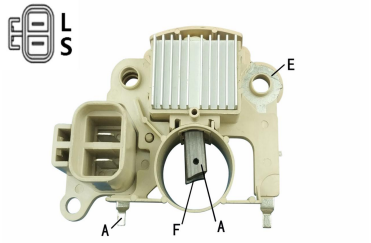


HIM281

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V
39mm ID Slip Ring Cover

REFERENCES..

YUNYI	13601000 / 06-013
WAI / TRANSPO	IM281
AS	ARE5006
MOBILETRON	VR-H2009-28




HIM282

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V
Dim: 39mm

REFERENCES..

WAI / TRANSPO	IM282
AS	ARE5030
CASCO	CRE35107AS
MOBILETRON	VR-H2009-30




HIM286

FEATURES: Regulation:A-Circuit
Voltage Set Point 28.70 V

REFERENCES..

YUNYI	13660300 / 06-052
WAI / TRANSPO	IM286
AS	ARE5070
MOBILETRON	VR-H2009-69B

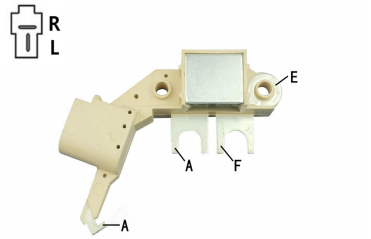


HIM290

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.7V
L-R Terminals

REFERENCES..

WAI / TRANSPO	IM290
AS	ARE5025
CARGO	138309
MOBILETRON	VR-H2009-63




HIM292

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.4V
Dim: 24mm

REFERENCES..

YUNYI	13601800 / 06-031
WAI / TRANSPO	IM292
AS	ARE5034
MOBILETRON	VR-H20009-45




HIM318

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.70 V
Under Voltage Indication

REFERENCES..

YUNYI	13607300/06-114
WAI / TRANSPO	IM318
AS	ARE5091
MOBILETRON	VR-H2009-62

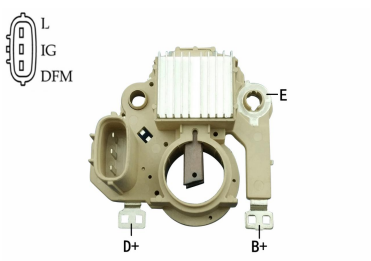


HIM341

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.60 V Soft Start 30 %
Field, Lamp Shorted Circuit Protection
Sense Loss Indication
Under Voltage Indication
Over Voltage Indication DFM function

REFERENCES..

YUNYI	13606200 / 06-096
AS	ARE5035
CARGO	138340
MOBILETRON	VR-H2009-70




HIM345

FEATURES: Voltage Set Point:14.3V
Regulation:A-Circuit
Dim: 24mm

REFERENCES..

YUNYI	13602000 / 06-034
WAI / TRANSPO	IM345
AS	ARE5019S
MOBILETRON	VR-H2009-95




HIM350

FEATURES: Regulation:A-Circuit Voltage Set Point 14.40V
Soft Start 30 % LRC 2.5 Sec
Field Shorted Circuit Protection
Sense Open Indication
Under Voltage Indication
Over Voltage Indication
Dim: 24mm ID Slip Ring Cover

REFERENCES..

YUNYI	13606900/ 06-106
WAI / TRANSPO	IM350
AS	ARE5102
MOBILETRON	VR-H2009-115

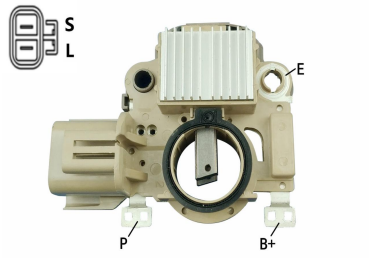


HIM362

FEATURES: Regulation:A-Circuit Voltage Set Point 14.40 V
Soft Start 30 % LRC2 5 Sec
Field Shorted Circuit Protection
Sense Open Indication
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13602100 / 06-035
WAI / TRANSPO	IM362
AS	ARE5040
MOBILETRON	VR-H2009-118

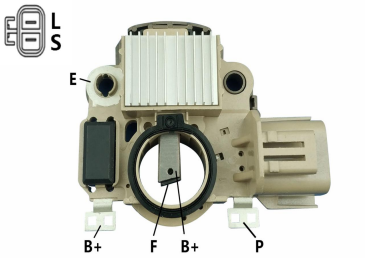


HIM369

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.5 V
S-L Terminals
Soft Start 30 %
Sense Open Indication

REFERENCES..

YUNYI	1360DT00
WAI / TRANSPO	IM369
AS	ARE5156S
MOBILETRON	VR-H2009-108




HIM381

FEATURES: Regulation:A-Circuit
Voltage Set Point 12V
Soft Start 30 % LRC 5 sec
Field Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13607500 / 06-116
WAI / TRANSPO	IM381
AS	ARE5092
MOBILETRON	VR-H2009-90

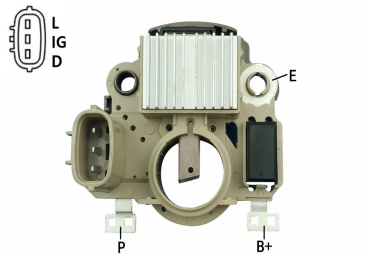


HIM383

FEATURES: Regulation:A-Circuit
Voltage Set Point:28.2V

REFERENCES..

AS	ARE5057
CARGO	238949
POWERMAX	81111543
MOBILETRON	VR-H2009-135B

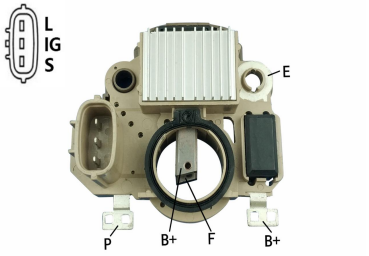


HIM396

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.60 V
Soft Start 30% LRC 5Sec
Field Shorted Circuit Protection
Sense Open Indication
Under / Over Voltage Indication

REFERENCES..

YUNYI	1360EN00
WAI / TRANSPO	IM826
AS	ARE5089
MOBILETRON	VR-H2009-120




HIM472

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 30%
Sense Open Indication
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	1360DP00
WAI / TRANSPO	IM472
AS	ARE5106
MOBILETRON	VR-H2009-109

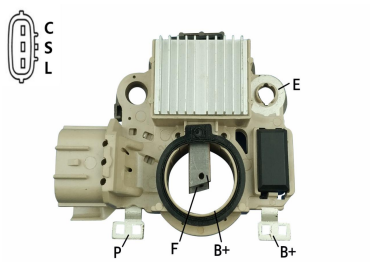


HIM476

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.60V
Soft Start 30 % LRC 5 Sec
Field Shorted Circuit Protection
Sense Open Indication
Under / Over Voltage Indication

REFERENCES..

YUNYI	13602800 / 06-050
WAI / TRANSPO	IM476
AS	ARE5036
MOBILETRON	VR-H2009-99

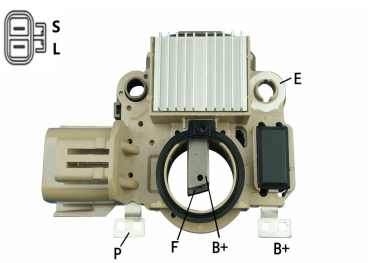


HIM481

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 30 % LRC 2.5 Sec
Field Shorted Circuit Protection
Sense Open Indication
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13609200 / 06-139
WAI / TRANSPO	IM473
CARGO	332861
MOBILETRON	VR-H2009-122




HIM498

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 30 % LRC 5 sec
Field, Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFM function

REFERENCES..

YUNYI	13606300 / 06-097
WAI / TRANSPO	IM498
AS	ARE5038
MOBILETRON	VR-H2009-105

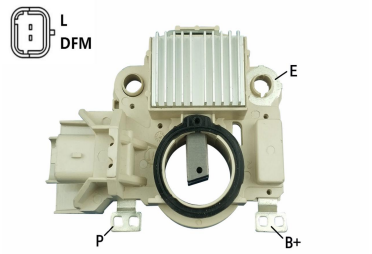


HIM503

FEATURES:
Regulation:A-Circuit
RC=0 Vs=13.50V
RC=55% Vs=14.25V
PCM Rejulator

REFERENCES..

YUNYI	13604400/06-074
WAI / TRANSPO	IM503
AS	ARE5046
MOBILETRON	VR-H2009-102




HIM505

FEATURES:
Regulation:A-Circuit
Voltage Setpoint: 14.4 V
Terminal Identification: (N/C)-D-P
3-pin connector but only D-P are used

REFERENCES..

YUNYI	13620100 / 06-100
WAI / TRANSPO	IM505
AS	ARE5054
MOBILETRON	VR-H2009-114




HIM547

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 25%
Sense Open Indication Regulated
Voltage Control(RVC)

REFERENCES..

YUNYI	13622100
WAI / TRANSPO	IM547
AS	ARE5110
MOBILETRON	VR-H2009-130

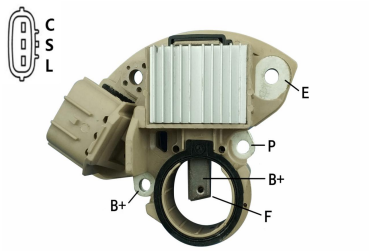


HIM558

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.5 V
Soft start 30%
LRC 5 sec
DFM function

REFERENCES..

YUNYI	13607100 / 06-109
WAI / TRANSPO	IM558
AS	ARE5082
MOBILETRON	VR-H2009-113




HIM582

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 30%
Field，Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFM Function

REFERENCES..

YUNYI	1360ER00
WAI / TRANSPO	IM582
AS	ARE5116
MOBILETRON	VR-H2009-119




HIM622

FEATURES:
Regulation:A-Circuit
RC=0 Vs=13.50V
RC=55% Vs=14.25V
PCM Regulator

REFERENCES..

YUNYI	13620600 / 06-124
WAI / TRANSPO	IM622
AS	ARE5164S
MOBILETRON	VR-H2009-140




HIM624

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50V
Soft Start 12.5 %,LRC 8 Sec
Self Exciting Function
LIN Regulator

REFERENCES..

YUNYI	13621400
WAI / TRANSPO	IM624
AS	ARE5139S
HONDA	AHGA88




HIM630

FEATURES:
Voltage Set Point :14.4V
Regulation:A-Circuit
PD Regulator

REFERENCES..

YUNYI	13622900
WAI / TRANSPO	IM630
AS	ARE5121
MOBILETRON	VR-H2009-209




HIM688

FEATURES:
Regulation:A-Circuit
Voltage Set Point 28.40 V
Field rating 5 Amps
Soft Start 30 % Under Voltage Indication
Over Voltage Indication

REFERENCES..

WAI / TRANSPO	IM688
VALEO	21289221
KHD	1183118
MOBILETRON	VR-H2009-125B




HIM691

FEATURES:
Regulation:A-Circuit
Voltage Set Point 28.50 V
Soft Start 30 % Field
Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	1360EZ00
WAI / TRANSPO	IM691
AS	ARE5053
MOBILETRON	VR-H2009-183B




HIM699

FEATURES:
Regulation:A-Circuit
Voltage Set Point 28.50 V Soft Start 30 %
Field, Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFM function

REFERENCES..

YUNYI	1360CF00
AS	ARE5088
CARGO	330970
MOBILETRON	VR-H2009-132




HIM829

FEATURES:
Regulation:A-Circuit
Voltage Setpoint: 14.5 V
Terminal Identification: S-LTerminals
26mm ID Slip Ring Cover

REFERENCES..

WAI / TRANSPO	IM829
AS	ARE5200S
MAZDA	F2G818W70
MOBILETRON	VR-H2009-35




HIM830

FEATURES:
Regulation:A-Circuit
Voltage Setpoint: 14.5 V
Terminal Identification: S-Lterminals

REFERENCES..

YUMYI	13601900 / 06-032
WAI / TRANSPO	IM830
AS	ARE5008
MOBILETRON	VR-H2009-22




HIM831

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.4V

REFERENCES..

YUNYI	13605600 / 06-088
WAI / TRANSPO	IM831
AS	ARE5013
MOBILETRON	VR-H2009-78




HIM832

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

YUNYI	13607200 / 06-110
WAI / TRANSPO	IM832
AS	ARE5168S
MOBILETRON	VR-H2009-37




HIM834

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

YUNYI	13608700 / 06-134
WAI / TRANSPO	IM834
AS	ARE5134




HIM835

FEATURES:
Regulation:A-Circuit
Voltage Setpoint: 14.7 V
Terminal Identification: C-FR-IG-L

REFERENCES..

MITSUBISHI	A001T06092
HONDA	31100-P05-C02
HONDA	31100-P08-024RM
WAI / TRANSPO	IM835




HIM843

FEATURES:
Regulation:A-Circuit
Voltage Set Point 28.5 V
S-L Terminals

REFERENCES..

YUNYI	13660100 / 06-019
WAI / TRANSPO	IM843
AS	ARE5039
MITSUBISHI	A866X26070

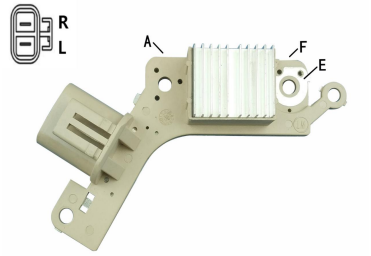


HIM843A

FEATURES:
Regulation:A-Circuit
Voltage Set Point 28.40 V
Active Lamp
DFM Function

REFERENCES..

YUNYI	13660600
WAI / TRANSPO	IM635
AS	ARE5120
MOBILETRON	VR-H2009-197B




HIM845

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.4V
C(G)-S-L-FR
Terminals

REFERENCES..

YUNYI	13620500 / 06-122
WAI / TRANSPO	IM845
AS	ARE5021
MOBILETRON	VR-H2009-73




HIM846

FEATURES:
Regulation:A-Circuit
Voltage Set Point:28.6V

REFERENCES..

YUNYI	13600700 / 06-008
WAI / TRANSPO	IM846
ASE	ARE5009
MOBILETRON	VR-H2009-80B

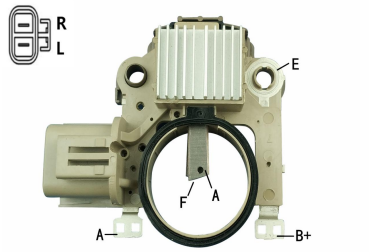


HIM846A

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.80V

REFERENCES..

YUNYI	13604900 / 06-080
WAI / TRANSPO	IM849
ASE	ARE5108
MITSUBISHI	A866X57172




HIM847

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

YUNYI	13600200 / 06-002
WAI / TRANSPO	IM847
AS	ARE5010
MOBILETRON	VR-H2009-67




HIM848

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.40 V
Soft Start 30 % LRC 5 Sec
Field Shorted Circuit Protection
Sense Open Indication
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13605900 / 06-092
WAI / TRANSPO	IM848
AS	ARE5031
MOBILETRON	VR-H2009-107

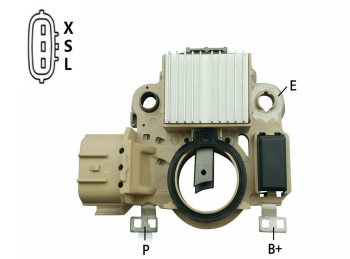


HIM850

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50 V
DFM Function

REFERENCES..

YUNYI	13607600/06-117
WAI / TRANSPO	IM850
AS	ARE5022
MOBILETRON	VR-H2009-71




HIM851

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.5 V
Soft start 30% LRC 5 sec
DFM function

REFERENCES..

YUNYI	13607000 / 06-108
WAI / TRANSPO	IM851
AS	ARE5047
MOBILETRON	VR-H2009-94




HIM853

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 30 %
LRC 5 sec
Field Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13607900/06-120
WAI / TRANSPO	IM853HD
AS	ARE5113
MOBILETRON	VR-H2009-152




HIM854

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.40V

REFERENCES..

YUNYI	13605300 / 06-085
WAI / TRANSPO	IM854
AS	ARE5017
MOBILETRON	VR-H2009-79




HIM1006

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.50V

REFERENCES..

YUNYI	13605000 / 06-081
WAI / TRANSPO	IY702
AS	ARE5077
MOBILETRON	VR-MD12




HIM1009

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.40 V

REFERENCES..

YUNYI	13602500 / 06-043
WAI / TRANSPO	IY108
AS	ARE9024
DAEWOO	93740980




HIM1011

FEATURES: Regulation:A-Circuit
Voltage Set Point 28.70 V

REFERENCES..

YUNYI	13606500 / 06-102
LESTER	20059
MITSUBISHI	ME108147
MITSUBISHI	A003TA8199




HIM1012

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.80 V

REFERENCES..

YUNYI	13602700 / 06-046
AS	ARE5041
CARGO	230502
MOBILETRON	VR-H2009-58




HIM1013

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.40 V

REFERENCES..

YUNYI	13602700 / 06-046
AS	ARE5041
MITSUBISHI	A2T2094B
MOBILETRON	VR-H2009-58




HIM1014

FEATURES: Voltage Set Point 14.50V
Regulation:A-Circuit

REFERENCES..

YUNYI	13603500 / 06-060
FIT UNIT	JFZ182
MANDO	TA500C00101
MOBILETRON	VR-H2009-117




HIM1015

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.50V

REFERENCES..

YUNYI	13603200 / 06-056
AS	ARE3079
VALEO	TA500C11601
MOBILETRON	VR-H2009-128




HIM1016

FEATURES: Voltage Set Point 28.65V
Regulation:A-Circuit

REFERENCES..

YUNYI	13604200 / 06-072
WAI / TRANSPO	IY713
AS	ARE5131
MOBILETRON	VR-H2009-191B




HIM1017

FEATURES: Voltage Set Point 28.65V
Regulation:A-Circuit

REFERENCES..

YUNYI	13604300 / 06-073
WAI / TRANSPO	IY704
AS	ARE9076
MOBILETRON	VR-H2009-192B




HIM1018

FEATURES: Regulation:A-Circuit
Voltage Set Point 28.65V

REFERENCES..

YUNYI	13605100 / 06-082
FIT UNIT	MT003




HIM1019

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.80V

REFERENCES..

YUNYI	13606600 / 06-103




HIM1020

FEATURES: Voltage Set Point 14.50V
Regulation:A-Circuit

REFERENCES..

YUNYI	13605800 / 06-090
AS	ARE5048
NEW-ERA	216183
MITSUBISHI	A866X41072




HIM1021

FEATURES:
Regulation:A-Circuit
Voltage Set Point 28.35 V

REFERENCES..

YUNYI	13650100 / 06-095
AS	ARE5052
MITSUBISHI	A0037A8591
FIT UNIT	JFZ1731




HIM1025

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.45 V
S-L Terminals Soft Start
Short Circuit Protection

REFERENCES..

MOBILETRON	VR-H2009-121




HIM1029

FEATURES: Regulation:A-Circuit
Voltage Set Point 28.50 V

REFERENCES..

YUNYI	1360ET00
MITSUBISHI	A866X51472
OEM	5001866377
MOBILETRON	VR-H2009-154B




HIM1812

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.40V

REFERENCES..

GPD	HIM1812




HIM9001

FEATURES: Regulation:A-Circuit
Voltage Set Point 28.50 V

REFERENCES..

YUNYI	13606900/ 06-106
MITSUBISHI	ME192607
MITSUBISHI	MITA3TN5188
MITSUBISHI	A866X54172




HIM529

FEATURES: A-Circuit
RC=0 Vs=13.50V
RC=55%
Vs=14.25V
PCM Regulator

REFERENCES..

YUNYI	13620200/06-101
WAI/TRANSPO	VR-H2009-98
MOBILETRON	1M529
AS	ARE5055



HIM564

FEATURES: A-Circuit
Voltage Set Point 14.50V
Soft Start 30%
LRC 5 Sec
Field Shorted Circuit Protection Sense
Open Indication
Under/Over Voltage Indication

REFERENCES..

YUNYI	13620700/06-125
WAI/TRANSPO	IM564
MOBILETRON	VR-H2009-148
AS	ARE5096



HIM757

FEATURES: A-Circuit
Voltage Set Point 14.40 V

REFERENCES..

YUNYI	13601100/06-014
MOBILETRON	VR-H2009-82
WAI/TRANSPO	IM757
AS	ARE5007




HIM465

FEATURES: Regulation:A-CircuitVoltage Set Point:14.4v24mmID Slip Ring Cover
D-P Teminals

REFERENCES..

YUNYI	13602900/06-051
MOBILETRON	VR-HI2009-100
WAI/TRANSPO	IM465
AS	ARE5042




HIM527

FEATURES: A-Circuit
RVC=0 Vset=13.80V
RC=70%
Vset=14.45V
Soft Start 31%
DFM function RVC Regulator

REFERENCES..

YUNYI	1360DH00
MOBILETRON	VR-H2009-172
WAI/TRANSPO	IM527
AS	ARE5117



HIM569

FEATURES: A-Circuit
Voltage Set Point 14.50V
Soft Start 18%
Field Lamp Shorted Circuit Protection
Under/Over Voltage Indication
DFM Function

REFERENCES..

YUNYI	13623200
MOBILETRON	VR-H2009-139
WAI/TRANSPO	IM569
AS	ARE5059



HIM293

FEATURES: A-Circuit
Voltage Set Point 14.80V

REFERENCES..

YUNYI	1360DR00
MOBILETRON	VE-H2009-64
WAI/TRANSPO	IM293
AS	ARE5107




HIM278

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V
Dim: 26mm

REFERENCES..

GPD	13602400 / 06-041
WAI / TRANSPO	IM278
AS	ARE5016
MOBILETRON	VR-H2009-103



HIM625

FEATURES:
A-Circuit
Voltage Set Point 14.50 V
Soft Start 25%
LRC 5 Sec
Field，Lamp Shorted Circuit Protection
Sense Loss Indication
Under / Over Voltage Indication

REFERENCES..

YUNYI	13622800
MOBILETRON	VR-H2009-210
WAI/TRANSPO	IM625
AS	ARE5122




HIM1027

FEATURES:
A-Circuit
Voltage Set Point 14.50V
Field Lamp Shorted Circuit Protection
Sense Loss Indication
C Terminal Regulator
Self Exciting Function

REFERENCES..

YUNYI	13624000
MOBILETRON	VR-H2009-173



HIM404

FEATURES:
A-Circuit
Voltage Set Point 14.50V
Soft Start 12.5%
LRC 8 Sec
Self Exciting Function
LIN Regulator

REFERENCES..

YUNYI	13621700
MOBILETRON	VR-H2009-171
WAI/TRANSPO	IM404
AS	ARE5123




HIM1027

FEATURES:
A-Circuit
Voltage Set Point 14.70V
Soft Start 18%
Field Shorted Circuit Protection
Under/Over Voltage

REFERENCES..

YUNYI	1360DY00
FIT UNIT	A7TA3577B




HIM518

FEATURES:
A-Circuit
Voltage Set Point 14.30V

REFERENCES..

YUNYI	13605500/06-087
MOBILETRON	VR-H2009-153
WAI/TRANSPO	IMM518




HIM636

FEATURES:
12 Volt, A-Circuit, L-FR Terminals, 14.5 Vset
Mitsubishi IR/IF Alternators
4 Second LRC
Soft Start

REFERENCES..

WAI/TRANSPO	IM636
MOBILETRON	VR-H2009-195
KREUF	ARM4382
MITSUBISHI	A004TJ0382




HN033

FEATURES: Regulation:A-Circuit
Voltage Set Point 28.80 V

REFERENCES..

YUNYI	13350400/03-024
AS	ARE9040
CQ	CQ1010581
MOBILETRON	VR-2005-102B




HN033A

FEATURES: Regulation:A-Circuit
Voltage Set Point 28.80 V

REFERENCES..

YUNYI	13351900
UNIPOINT	YR669
MOBILETRON	VR-2005-102B
FIT UNIT	2011520210

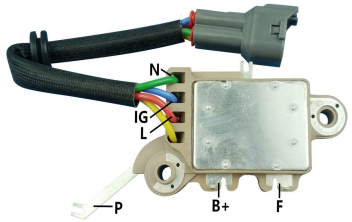


HN46-82202

FEATURES: Voltage Set Point 12 V
Terminal Block

REFERENCES..

WAI / TRANSPO	46-82202
AS	ATR6002S
MOBILETRON	TB-ND160
ELECTROLOG	TCB6002i




HN053

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.4V

REFERENCES..

GPD	HN053




HN215

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 30 % LRC 3 Sec
C Terminal Regulator
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication 63.5mm
Mounting

REFERENCES..

YUNYI	1332C100/03-040
WAI / TRANSPO	IN215
AS	ARE6141S
MOBILETRON	VR-H2005-77




HN217B

FEATURES: Regulation:A-Circuit
Voltage Set Point:28.35V

REFERENCES..

YUNYI	13340300/03-015
WAI / TRANSPO	IN217 with brush hold
AS	ARE6056
MOBILETRON	VR-H2005-12




HN218B

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.2V

REFERENCES..

YUNYI	13340400/03-029
WAI / TRANSPO	IN218 with brush hold
AS	ARE6003
MOBILETRON	VR-H2005-11




HN220

FEATURES: Regulation:A-Circuit
VoltageSetPoint14.40V
Soft Start30% LRC 3sec
Field Shorted Circuit Protection
Sense Open Indication
Active lamp function-with output
Under/OverVoltage Indication
63.5mmMounting

REFERENCES..

YUNYI	13324000/03-056
WAI / TRANSPO	IN220
AS	ARE6001
MOBILETRON	VR-H2005-4A




HN221

FEATURES: Regulation:A-Circuit
Voltage SetPoint14.50V
Soft Start 30% LRC 3sec
Field Shorted Circuit Protection
Under/OverVoltage Indication
63.5mmMounting

REFERENCES..

YUNYI	13325100/03-079
WAI / TRANSPO	IN221
AS	ARE6004
MOBILETRON	VR-H2005-5H




HN224

FEATURES:
Regulation:A-Circuit
Voltage Set：Point：14.50V
L Terminal Drives Choke
DFM Function
63.5mm Mounting

REFERENCES..

YUNYI	13322500/03-036
WAI / TRANSPO	IN224
AS	ARE6022
MOBILETRON	VR-H2005-10




HN225

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.5V
D-FR-IG-L Terminals
Active lamp function - with output 63.5mm Mtg. Length

REFERENCES..

WAI / TRANSPO	IN225
AS	ARE6005
CQ	CQ1010309
MOBILETRON	VR-H2005-8




HN226

FEATURES:
Regulation:A-Circuit Voltage Set Point:14.5V
Soft Start 30 % LRC 3 sec
Field Shorted Circuit Protection
IG / Sense Open Indication
Under / Over Voltage Indication
DFM Function
63.5mm Mounting

REFERENCES..

YUNYI	13322700/03-038
WAI / TRANSPO	IN226
AS	ARE6006S
MOBILETRON	VR-H2005-9




HN233

FEATURES:
Regulation:A-Circuit
Voltage Set Point 28.30 V

REFERENCES..

YUNYI	13340500/03-060
WAI / TRANSPO	IN233
AS	ARE6046
CQ	CQ1010606




HN248

FEATURES:
Regulation:A-Circuit Voltage Set Point:14.5V
Soft Start 30 % LRC 5 sec
Field, Shorted Circuit Protection
L Terminal Drives Choke
Under Voltage Indication
Over Voltage Indication
63.5mm Mounting

REFERENCES..

YUNYI	13324900/03-077
WAI / TRANSPO	IN248
AS	ARE6065
NEW-ERA	IVR-5002
MOBILETRON	VR-H2005-172




HN250

FEATURES:
Regulation:A-Circuit Voltage SetPoint 14.50V
Soft Start 30% LRC 2.5sec
Field Shorted Circuit Protection
SenseOpenIndication
Activelampfunction-withoutput
Under/OverVoltageIndication
57.5mmMounting

REFERENCES..

YUNYI	13320400/03-007
WAI / TRANSPO	IN250
AS	ARE6008
MOBILETRON	VR-H2005-23A




HN251

FEATURES:
Regulation:A-Circuit
Voltage Set Point：14.50V
SoftStart 30% LRC 2.5sec
Field Shorted Circuit Protection
Under/OverVoltage Indication
57.5mm Mounting

REFERENCES..

YUNYI	13323100/03-044
WAI / TRANSPO	IN251
AS	ARE6009
MOBILETRON	VR-H2005-24




HN252

FEATURES:
Regulation:A-Circuit
Voltage Set Point：14.50V
SoftStart 30%
LRC 2.5sec
Field Shorted Circuit Protection
Under/OverVoltage Indication
57.5mm Mounting

REFERENCES..

YUNYI	13321300/03-019
WAI / TRANSPO	IN252
AS	ARE0052
MOBILETRON	VR-H2005-25




HN253

FEATURES:
Regulation:A-Circuit
Voltage Set Point：14.50V
Soft Start 30%
LRC 2.5sec
Field Shorted Circuit Protection
Under/OverVoltageIndication
57.5mmMounting

REFERENCES..

YUNYI	13325200/03-080
AS	ARE6019
WAI / TRANSPO	IN253
MOBILETRON	VR-H2005-26A




HN254

FEATURES:
Regulation:A-Circuit
Voltage Set Point：14.50V
Soft Start 30% LRC 2.5sec
Field Shorted Circuit Protection
Under/OverVoltageIndication
57.5mmMounting

REFERENCES..

YUNYI	13320300/03-005
WAI / TRANSPO	IN254
AS	ARE6028T
CQ	CQ1010441
MOBILETRON	VR-H2005-39




HN255

FEATURES:
Regulation:A-Circuit
Voltage Set Point：14.50V
Soft Start 30%
Field Shorted Circuit Protection
Under/OverVoltage Indication
57.5mm Mounting

REFERENCES..

YUNIY	13324200/03-066
WAI / TRANSPO	IN255
AS	ARE6062
MOBILETRON	VR-H2005-15H




HN256

FEATURES:
Regulation:A-Circuit Voltage SetPoint 14.50V
Soft Start 30% LRC 2.5sec
Field Shorted Circuit Protection
SenseOpen Indication
Active lamp function-with output
Under/OverVoltageIndication
57.5mmMounting

REFERENCES..

WAI / TRANSPO	IN256
AS	ARE6010
CASCO	CRE40121
WOODAUTO	VRG46881




HN257

FEATURES:
Regulation:A-Circuit Voltage Set Point：14.50V
Soft Start 30% LRC 2.5sec
Field Shorted Circuit Protection
SenseOpen Indication
Active lamp function-withoutput
Under/OverVoltageIndication
57.5mmMounting

REFERENCES..

YUNYI	13320700/03-011
WAI / TRANSPO	IN257
AS	ARE6031
MOBILETRON	VR-H2005-32DG




HN302

FEATURES:
Regulation:A-Circuit Voltage Set Point：14.50V
Soft Start 30% LRC 2.5sec
Field Shorted Circuit Protection
Sense Open Indication
Active lamp function-with output
Under/OverVoltage Indication
57.5mm Mounting

REFERENCES..

YUNYI	13325300/03-081
WAI / TRANSPO	IN302
AS	ARE6076
MOBILETRON	VR-H2005-179



HN504

FEATURES:
Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

REFERENCES..	JFZ172
YUNYI	S31-002/13328202
UTM	RQ8312A
ZAUFER	310N10915Z




HN330

FEATURES:
Regulation:A-Circuit
Voltage Set Point ：14.50 V
Soft Start 30 % LRC 2.5 sec
Field Shorted Circuit Protection L Terminal Drives Choke
Under / Over Voltage Indication DFM Function
63.5mm Mounting

REFERENCES..

YUNYI	13323700/03-052
WAI / TRANSPO	IN330
AS	ARE6045
MOBILETRON	VR-H2005-173




HN337

FEATURES:
Regulation:A-Circuit
Voltage Set Point：14.00V
Soft Start 30% LRC 2.5sec
Field,Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFMfunction 63.5mmMounting

REFERENCES..

YUNYI	13325900/03-094
WAI / TRANSPO	IN337
AS	ARE6107
MOBILETRON	VR-H2005-197




HN343

FEATURES:
Voltage Set point: 15.3 V
Regulation:A-Circuit
Terminal Identification: IL-IGN-C-FR
Standard lamp function - no output
63.5mm Mounting

REFERENCES..

WAI / TRANSPO	IN343
AS	ARE6094
WOODAUTO	VRG36225
MOBILETRON	VR-H2005-40A




HN372

FEATURES:
Regulation:A-Circuit
Voltage Set Point： 14.20 V
Features: Ignition activated
Soft start Under-voltage lamp
Field short-circuit protection

REFERENCES..

WAI / TRANSPO	IN372
AS	ARE6103
KRAUF	ARN6372
MOBILETRON	VR-H2005-105




HN431

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.60 V
DFM Function 63.5mm Mounting
Note: Active lamp function - with output.

REFERENCES..

YUNYI	13322200/03-033
WAI / TRANSPO	IN431
AS	ARE6011
MOBILETRON	VR-H2005-10




HN434

FEATURES:
tVoltage Set Point： 14.50 V
Soft Start 30 % LRC 2.5 sec
Field Shorted Circuit Protection
Sense Open Indication
Under / Over Voltage Indication
63.5mm Mounting
Note: Standard lamp function - no output.

REFERENCES..

YUNYI	13321800/03-027
WAI / TRANSPO	IN434
AS	ARE6012
MOBILETRON	VR-H2005-33A




HN435

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.5V
63.5mm Mounting
Note: Active lamp function - with output.

REFERENCES..

YUNYI	13320800/03-012
WAI / TRANSPO	IN435
AS	ARE6004
MOBILETRON	VR-H2005-5




HN437

FEATURES:
Regulation:A-Circuit
Voltage SetPoint14.50V
Soft Start 30% LRC 5sec
Field Shorted Circuit Protection
Sense Open Indication
Under/OverVoltageIndication
63.5mmMounting

REFERENCES..

YUNYI	13321500/03-021
WAI / TRANSPO	IN437
AS	ARE6013
MOBILETRON	VR-H2005-30A




HN439

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.6V
63.5mm Mounting
Note: Standard lamp function - no output.

REFERENCES..

YUNYI	13321100/03-017
WAI / TRANSPO	IN439
ASE	ARE6002
MOBILETRON	VR-H2005-31A




HN440

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.0V
63.5mm Mounting
Note: Standard lamp function - no output.

REFERENCES..

YUNYI	13324100/03-059
WAI / TRANSPO	IN440
AS	ARE6025
MOBILETRON	VR-H2005-35




HN441

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.60 V
Soft Start 30 % LRC 2.5 sec
Field Shorted Circuit Protection
Sense Open Indication
Under / Over Voltage Indication
63.5mm Mounting

REFERENCES..

YUNYI	13321200/03-018
WAI / TRANSPO	IN441
AS	ARE6014
MOBILETRON	VR-H2005-36A




HN442

FEATURES:
Regulation:A-Circuit
Voltage Set point: 14.1 V
Terminal Identification: L Terminal
Active lamp function - with output w/o LRC
63.5mm Mtg. Length

REFERENCES..

WAI / TRANSPO	IN442
AS	ARE6078
WOODAUTO	VRG46898
MOBILETRON	VR-H2005-34




HN443

FEATURES:
Regulation:A-Circuit
Voltage Set Point： 14.40V
Soft Start30% LRC 5sec
Field Shorted Circuit Protection
Under/OverVoltageIndication
63.5mm Mounting

REFERENCES..

YUNYI	13325500/03-083
WAI / TRANSPO	IN443
DENSO	126000-1760
MOBILETRON	VR-H2005-34




HN444

FEATURES:
Regulation:A-Circuit
Voltage Set Point：14.50V
Soft Start 30% LRC 5sec
Field Shorted Circuit Protection
IG/Sense Open Indication
Active lamp function-withoutput
Under/Over Voltage Indication
L Terminal Drives Choke
DFM Function 63.5mmMounting

REFERENCES..

WAI / TRANSPO	IN444
AS	ARE6024
CASCO	CRE40127
MOBILETRON	VR-H2005-9DG




HN445

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50V
63.5mm Mounting
L Terminal Drives Choke
DFM Function

REFERENCES..

YUNYI	13320100/03-001
WAI / TRANSPO	IN445
AS	ARE6015
MOBILETRON	VR-H2005-40




HN447

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50V
Soft Start30% LRC 5sec
Field Shorted Circuit Protection
Under/OverVoltage Indication
L Terminal Drives Choke
DFMFunction 63.5mmMounting

REFERENCES..

YUNYI	13321900/03-028
WAI / TRANSPO	IN447
POWERMAX	81114833
MOBILETRON	VR-H2005-65




HN447A

FEATURES:
Regulation:A-Circuit
Voltage Set Point：14.50V
Field Shorted Circuit Protection
Over Voltage Indication

REFERENCES..

GPD	HN447A




HN449

FEATURES:
Regulation:A-Circuit
Voltage Set point: 14.5 V
Terminal Identification: P-IG-L
Standard lamp function - no output 63.5mm Mtg. Length

REFERENCES..

YUNYI	13323200/03-045
WAI / TRANSPO	IN449
AS	ARE6032
MOBILETRON	VR-H2005-59




HN450

FEATURES:
Regulation: A -Circuit
Voltage Set Point 14.5 V
P-IG-L Terminals
57.5mm Mounting

REFERENCES..

WAI / TRANSPO	IN450
YUNYI	03-025/13321600
AS	ARE6030
MOBILETRON	VR-H2005-60




HN453

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Sense Open Indication
Under / Over Voltage Indication

REFERENCES..

YUNYI	13320500/03-008
WAI / TRANSPO	IN453
AS	ARE6033
MOBILETRON	VR-H2005-46A




HN454

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.5 V
Soft Start 30 %
Field, Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFM function 63.5mm Mounting

REFERENCES..

WAI / TRANSPO	IN454
AS	ARE6043
WOODAUTO	VRG47493
MOBILETRON	VR-H2005-92




HN455

FEATURES:

Regulation:A-Circuit
Voltage Set Point： 14.50 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Sense Open Indication
Active lamp function - with output
Under/ Over Voltage Indication
DFM Function 63.5mm Mounting

REFERENCES..

YUNYI	13322400/03-035
WAI / TRANSPO	IN455
AS	ARE6027
MOBILETRON	VR-H2005-64A




HN460

FEATURES:

Regulation:A-Circuit
Voltage Set point: 28.0 V
Terminal Identification: S-IG-L
Standard lamp function - no output 63.5mm Mounting

REFERENCES..

YUNYI	13322000/03-030
WAI / TRANSPO	IN460
AS	ARE6059
MOBILETRON	VR-H2005-66




HN461

FEATURES:

Regulation:A-Circuit
Voltage Set point: 28.0 V
Terminal Identification: S-IG-L
Standard lamp function - no output 63.5mm Mounting

REFERENCES..

YUNYI	13326500/03-101
WAI / TRANSPO	IN461
AS	ARE6021
MOBILETRON	VR-H2005-58




HN462

FEATURES:

Regulation:A-Circuit
Voltage Set Point 28.50 V
Soft Start 30 %
Field Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
63.5mm Mounting

REFERENCES..

YUNYI	13323600/03-051
WAI / TRANSPO	IN462
AS	ARE6044
MOBILETRON	VR-H2005-151B




HN463

FEATURES:

Regulation:A-Circuit
Voltage SetPoint14.50V
Soft Start 30%
LRC 5sec
Field Shorted Circuit Protection
Under/Over Voltage Indication
L Terminal Drives Choke
DFM Function 63.5mmMounting

REFERENCES..

MOBILETRON	VR-H2005-100
DENSO	126600-0520
DENSO	126600-0540
TOYOTA	27700-21050




HN920

FEATURES:

Regulation:A-Circuit
Voltage Set Point:14.3V
Active lamp function-with output

REFERENCES..

YUNYI	13350100/03-009
WAI / TRANSPO	IN920
AS	ARE6017
MOBILETRON	VR-H2005-2




HN921

FEATURES:

Regulation:A-Circuit
Voltage Set Point:14.0V

REFERENCES..

YUNYI	13350600/03-053
WAI / TRANSPO	IN921
AS	ARE6061
MOBILETRON	VR-H2005-2W




HN3054

FEATURES:

Regulation:B-Circuit
Voltage Se tPoint： 14.15V
Soft Start 30%
LRC 5sec
Field Shorted Circuit Protection
Under/OverVoltageIndication
DFMFunction 63.5mmMounting

REFERENCES..

YUNYI	13326200/03-096
WAI / TRANSPO	IN3054
AS	ARE6133S
MOBILETRON	VR-H2005-100




HN3570

FEATURES:

Regulation: B -Circuit
Voltage Set Point 13.7 V
LIN-1
COM02:LIN1-M-2 B
9600 Baud Rate(4 Byte)
Requires COM01 test adaptor for testing
ID Code:28

REFERENCES..

WAI / TRANSPO	IN3570
AS	ARE6110
MOBILETRON	VR-H2005-194
POWERMAX	81120779



HN6372

FEATURES: Regulation:A-Circuit
Voltage Set Point:13.8V

REFERENCES..

MOBILETRON	VRH2005171
YUNYI	S03-099/13310400
DENSO	1266007120
DENSO	1266007120




HN6342

FEATURES: Regulation:B-Circuit
Voltage Set Point:13.7V

REFERENCES..

DENSO	1042103690
YUNYI	13304000
MOBILETRON	VRH2005142
KRAUF	ARN5142

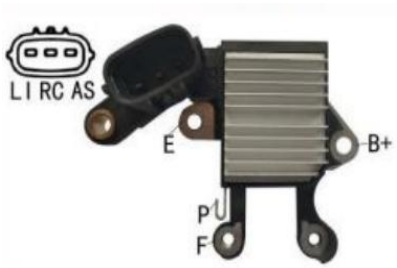

HN3770

FEATURES: Regulation:A-Circuit
Voltage Set Point:28.1V

REFERENCES..

DENSO	1042101810
HINO	270402442A
KRAUF:	ALN4810AN
YUNYI	2706078120




HN4180

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.3V

REFERENCES..

WAI / TRANSPO	IN4180




HN6011

FEATURES: Regulation:B-Circuit
5sec. LRC
Short Circuit Protection
Voltage Set Point: 14.4V

REFERENCES..

WAI / TRANSPO	IN6011
MOBILETRON	VR-H2005-164A




HRR2029

FEATURES: Regulation:B-Circuit
Voltage Set Point： 14.50V
Soft Start 30% LRC 2.5sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13301100/03-088
AS	ARE6081
WOODAUTO	VRG47525
MOBILETRON	VR-H2005-166




L-6103

FEATURES: Regulation:B-Circuit
Voltage Set Point 14.30 V
LIN 1.3
COM01:LIN 1-1
COM02:LIN 1-H-8 B
19200 Baud Rate (4 Byte)
ID Code： 116

REFERENCES..

YUNYI	13361600
MOBILETRON	VR-H2005-255
DENSO	GC84550
DENSO	1042112210




L-6180

FEATURES: Regulation:B-Circuit
Voltage Set Point 13.70 V
LIN 1.3
COM01:LIN 1-1
COM02:LIN 1-A-3 E
9600 & 19200 Baud Rate (4 Byte)

REFERENCES..

YUNYI	13361700
AS	ARE6158P
DENSO	126600-7850
KRAUF	ARN5225




HN3910

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.6V

REFERENCES..

DENSO	0204113059GL
KRAUF	ARN1070DD
MOBILETRON	VRH2005191
AS	ARE6201SUD45701



HN3680

FEATURES: FR-L-C-lG Terminals
Soft Start
Short Circuit Protection*
Voltage Set Point: 14.1V

REFERENCES..

MOBILETRON	VR-H2005-188
DENSO	1266003680
DENSO	1042106191




HN6324

FEATURES: Regulation:B-Circuit
Voltage Set Point:13.8V

REFERENCES..

DENSO	1266003060/1266003240
WAI / TRANSPO	IN6324
YUNYI	S03-084/13310200
MOBILETRON	VR-H2005-101




HN6370

FEATURES: Regulation:B-Circuit
Voltage Set Point:13.7V

REFERENCES..

DENSO	1266004110/1042102330
YUNYI	13360500
WAI / TRANSPO	IN6370
MOBILETRON	VR-H2005-209



HN3300

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.3V

REFERENCES..

DENSO	1266003300
MOBILETRON	VR-H2005-189
WAI / TRANSPO	IN3300
YUNYI	13362700




HN6399

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.4V

REFERENCES..

GPD	HN6399




HN6440

FEATURES: Regulation:B-Circuit
Voltage Set Point:13.7V

REFERENCES..

DENSO	1266004400
NUMBERS	11769
FORD	CX2310300AB
TRANSPO	IN4400



HN4490

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.1V

REFERENCES..

TOYOTA	449023R08/270600M100
DENSO	1266004490/1042109680
YUNYI	13370100
MOBILETRON	VRH2005107




HN6449-L

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.5V

REFERENCES..

GPD	HN6449-L




HN6325

FEATURES: Regulation:B-Circuit
Voltage Set Point:13.7V

REFERENCES..

DENSO	L06/7420/1042106021
MOBILETRON	VRH2005184
ZAUFER	310N10216Z
WAI / TRANSPO	IN6325




HN6302

FEATURES:
Regulation:B-Circuit
Voltage Set Point ： 14.10 V
IG-RLO-L-M Terminals
Soft Start 31 %
Field Shorted Circuit Protection
Under / Over Voltage Indication
DFM Function

REFERENCES..

YUNYI	13304600
WAI / TRANSPO	IN6302
AS	ARE6068
MOBILETRON	VR-H2005-95




HN6315

FEATURES:
Regulation:B-Circuit
Voltage Set Point：14.35 V
IG-C-L-FR Terminals Soft Start 31 %
Field, Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFM Function

REFERENCES..


WAI / TRANSPO	IN6315
AS	ARE6042
CQ	CQ1011399
MOBILETRON	VR-H2005-99



HN6323

FEATURES:
Regulation：B-Circuit
Voltage Set Point：14.20V
Soft Start 31% LRC 5sec
Field,LampShorted Circuit Protection
Sense Open Indication
Under Voltage Indication
Over Voltage Indication
DFM Function

REFERENCES..




HN6329

FEATURES:
Regulation：B-Circuit
Voltage Set Point 13.80 V
F-L Terminals
Features: Field Short-Circuit Protection RVC Regulator

REFERENCES..

YUNYI	13311800/03-085
WAI / TRANSPO	IN6329
AS	ARE6080
MOBILETRON	VR-H2005-163




HN6335

FEATURES:
Regulation:B-Circuit
Voltage Set Point：14.50 V
Soft Start 321%
Field, Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFM Function

REFERENCES..

YUNYI	13300200 / 03-031
WAI / TRANSPO	IN6335
AS	ARE6047
MOBILETRON	VR-H2005-90




HN6343

FEATURES:
Regulation: B -Circuit
Voltage Set Point 14.2 V
AS-RC-LI Terminals
W/Capacitor Inside
Regulated Voltage Control(RVC)
Used on 2nd Generation Ford Focus C-Max
Requires RVC01 tester box for testing

REFERENCES..

WAI / TRANSPO	IN6343
YUNYI	13301700
AS	ARE6038
MOBILETRON	VR-H2005-96




HN6349

FEATURES:
Regulation: B -Circuit
Voltage Set Point 13.5 V
LI-RC-AS Terminals

REFERENCES..

WAI / TRANSPO	IN6349HD
YUNYI	13308200
AS	ARE6109
MOBILETRON	VR-H2005-150




HN6363

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.40 V
Soft Start 12.5%
Self Exciting Function
LIN Regulator ID 244 Class 30

REFERENCES..

YUNYI	13360200
WAI/TRANSPO	IN6363
AS	ARE6112
MOBILETRON	VRH2005-190




HN6365

FEATURES:
Regulation:B-Circuit
Voltage Set Point：14.35 V
Soft Start 32 %
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFM function

REFERENCES..

YUNYI	13300500 / 03-064
WAI / TRANSPO	IN6365
AS	ARE6050
MOBILETRON	VR-H2005-149




HN5176

FEATURES: Voltage Set Point:14.4V
FR-L Terminals
Soft Start 2.5 sec. LRC
Short Circuit Protection

REFERENCES..

AS	ARE6205S
MOBILETRON	VR-H2005-176
AS-PL	UD46861ARE
FORD	3M5T10300UA




HN6001

FEATURES: Regulation:B-Circuit
Voltage Set Point 14.30 V
Soft Start 31 % LRC2. 5 Sec
Field Shorted Circuit Protection
Under /Over Voltage Indication

REFERENCES..

YUNYI	13301600
AS	ARE6089
WOODAUTO	VRG47497
WAI / TRANSPO	IN6001




HN6002

FEATURES: Regulation:B-Circuit
Voltage Set Point： 14.30 V
Soft Start 32 % LRC 2.5 sec
Field Shorted Circuit Protection
Sense open indication
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13300800/03-073
WAI / TRANSPO	IN6002
AS	ARE6087
MOBILETRON	VR-H2005-93




HN6003

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.80V
Soft Start 32% LRC 5sec
Field,LampShorted Circuit Protection
Sense Open Indication
Under Voltage Indication
Over Voltage Indication DFMfunction

REFERENCES..

YUNYI	13301200/03-089
WAI / TRANSPO	IN6003
MOBILETRON	VR-H2005-94
DENSO	104210-3300




HN6004

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.50 V
Soft Start 31 %
Field, Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFM Function

REFERENCES..

YUNYI	13300100 / 03-014
WAI / TRANSPO	IN6004
AS	ARE6048
MOBILETRON	VR-H2005-99




HN6009

FEATURES: Regulation:B-Circuit
Voltage Set Point： 14.80V
Soft Start 32% LRC 5sec
Field,Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFMF Function

REFERENCES..

YUNYI	13301300/03-090
WAI / TRANSPO	IN6009
AS	ARE6137S
MOBILETRON	VR-H2005-104




HN6015

FEATURES: Regulation:B-Circuit
Voltage Set Point： 14.20V
Soft Start 32% LRC 5sec
Field,Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication DFMfunction

REFERENCES..

YUNYI	13300700/03-069
WAI / TRANSPO	IN6015
AS	ARE6075
MOBILETRON	VR-H2005-91




HN6300

FEATURES: Regulation:B-Circuit
Voltage SetPoint 14.20V
Soft Start 32% LRC 5sec
Field,Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication DFM Function

REFERENCES..

YUNYI	13301500/03-092
WAI / TRANSPO	IN6300
AS	ARE6171S
MOBILETRON	VR-H2005-146




HN6301

FEATURES: Regulation:B-Circuit
Voltage Set Point： 14.30 V
LRC 5 sec
Field, Lamp Shorted Circuit Protection
Sense open indication
Under Voltage Indication
Over Voltage Indication DFM function

REFERENCES..

YUNYI	13300900/03-074
WAI / TRANSPO	IN6301
AS	ARE6039
MOBILETRON	VR-H2005-85




HN6366

FEATURES:
Regulation:B-Circuit
Voltage Set Point :14.50 V
Soft Start 32 %
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFM function

REFERENCES..

YUNYI	13300600 / 03-065
WAI / TRANSPO	IN6366
AS	ARE6049
MOBILETRON	VR-H2005-148




HN6368

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 13.80 V
LI-RC-AS TERMINALS
PCM Regulator

REFERENCES..

YUNYI	13306400
WAI / TRANSPO	IN6368
AS	ARE6173S
MOBILETRON	VR-H2005-177




HN6601

FEATURES:
Regulation:A-Circuit
RC=0 Vs=13.50V
RC=55% Vs=14.25V
AS-RC-LI Terminals PCM Regulator

REFERENCES..

YUNYI	13300300 / 03-042
WAI / TRANSPO	IN6601
AS	ARE6040
MOBILETRON	VR-H2005-88




HN7521

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.30 V
Soft Start 12.5%
Self Exciting Function
LIN Regulator
ID 50 Class 6

REFERENCES..

YUNYI	13360800
WAI/TRANSPO	IN7521




HN9252

FEATURES:
Regulation:A-Circuit
Voltage Setpoint: 14.5 V
Terminal Identification:
B+-FLD-TRIO-B- Terminals

REFERENCES..

YUNYI	13332100
WAI / TRANSPO	IN9252
AS	ARE6106
DENSO	126000-2520




HN9254

FEATURES:
Regulation:A-Circuit
Voltage Setpoint: 28.0 V
Terminal Identification:
NF-IG-L

REFERENCES..

YUNYI	1332DH00
WAI / TRANSPO	IN9254
AS	ARE6105
WOODAUTO	VRG36228




HN317

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.50 V
L Terminal Drives Choke
DFM Function

REFERENCES..

WAI / TRANSPO	IN317
YUNYI	03-062/13300400
AS	ARE6037
MOBILETRON	VR-H2005-83




HN6308

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.50V
SoftStart32% LRC5sec
Field,Lamp Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFM Function

REFERENCES..

YUNYI	13301400/03-091
WAI / TRANSPO	IN6308
AS	ARE6102
MOBILETRON	VR-H2005-152



HN6373

FEATURES:
Regulation:B-Circuit
Voltage Set Point:14V

REFERENCES..

DENSO	1266004060
MOBILETRON	VRH2005198
YUNYI	13360400
WAI / TRANSPO	IN6373




HN5370

FEATURES: Regulation:B-Circuit
Voltage Set Point:13.7V

REFERENCES..

WAI / TRANSPO	IN4960
YUNYI	2706031410
MOBILETRON	VRH2005229
DENSO	MX1042110971




HN7860

FEATURES: Regulation:B-Circuit
Voltage Set Point:13.7V

REFERENCES..

MOBILETRON	VRH2005156
YUNYI	273600T320/336150
KRAUF	ARN5156AN
KRAUF	1042000000




HN7980

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.3V

REFERENCES..

MOBILETRON	VRH2005239
TRANSPO	IN7980
BMW	12318645326
DENSO	1042110600/DAN1466




HN7970

FEATURES: Regulation:B-Circuit
Voltage Set Point:13.6V

REFERENCES..

MOBILETRON	VRH2005241
DENSO	7970/270600L110
OEM NO	1042107043
OEM NO	1042107060




HN8150

FEATURES: Regulation:B-Circuit
Voltage Set Point:13.7V

REFERENCES..

TOYOTA	270600V180
MOBILETRON	VRH2005214
TRANSPO	IN815
DENSO	IFX 8150/IFX1




HN7870

FEATURES: Regulation:B-Circuit
Voltage Set Point:13.7V

REFERENCES..

MOBILETRON	VRH2005266
OEM NO	1042113650
OEM NO	27060F0010
OEM NO	1042113620




HN5233

FEATURES: Regulation:B-Circuit
Voltage Set Point:13.7V

REFERENCES..

MOBILETRON	VRH2005233
ZAUFER	310N10825Z
DENSO	1042118860
LEXUS	2706036100




HN6477

FEATURES: Regulation:B-Circuit
Voltage Set Point:13.7V

REFERENCES..

MOBILETRON	VRH2005252
DENSO	4470/1042112410
TOYOTA	270600Y290
TOYOTA	270600Y320




HN7730

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.3V

REFERENCES..

MOBILETRON	VRH2005237
BMW	12317640131
UTM	RN0215A
YUNYI	13363100




HN7740

FEATURES: Regulation:B-Circuit
Voltage Set Point:13.7V

REFERENCES..

DENSO	IFX17740/1042106720
MOBILETRON	VRH2005215
WAI / TRANSPO	IN7740
LESTER NUMBEI	20854



HN9052

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.2V

REFERENCES..

MOBILETRON	VRH2005221
DENSO	1042118210
AS	ARE6179P




HM020

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.70 V

REFERENCES..

YUNYI	13830400/08-027
CARGO	235079
VALEO	593434
VALEO	YM1658



HM024

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.70 V

REFERENCES.. VAR201

YUNYI	13830400/08-024
VALEO	SG9B091
MOBILETRON	VR-V016



HM024-1

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.50 V

REFERENCES..

YUNYI	08-024
VALEO	SG9B091
MOBILETRON	VR-V014




HM032

FEATURES: Regulation:B-Circuit
Voltage Set Point： 14.50 V
Soft Start 30% LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
Self exciting function

REFERENCES..

YUNYI	13802600
WAI / TRANSPO	M542/M617
AS	ARE3063
MOBILETRON	VR-V5120




HM036

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.70 V

REFERENCES..


YUNYI	13830600 / 08-036
WAI / TRANSPO	M569
AS	ARE3060
MOBILETRON	VR-V6131



HM037

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.5V

REFERENCES..




HM113

FEATURES: Regulation:B-Circuit
Voltage Set Point 14.50 V
Soft Start 30% LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication
DFM function Self exciting function

REFERENCES..

YUNYI	13801000 / 08-016
CARGO	234533
VALEO	593362
VALEO	YM1610F




HM114

FEATURES: Regulation:B-Circuit
Voltage Set Point： 14.50 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13803600 / 08-057
WAI / TRANSPO	M535
AS	ARE3085
MOBILETRON	VR-PR5023




HM116

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.50V

REFERENCES..

YUNYI	13830700 / 08-038
FIT UNITS	CA2023
VALEO	2650571
VALEO	702151




HM118

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.60 V
L-FR Terminals
Soft Start 5 sec.LRC
Short Circuit Protection

REFERENCES..

WAI/TRANSPO	M549
AS	ARE3028
MOBILETRON	VR-V3689




HM120

FEATURES:
Regulation:A-Circuit
Voltage Set Point ： 14.5 V
L-IG Terminals

REFERENCES..

AS	ARE3105
KRAUF	ARV5633
MOBILETRON	VR-V5633
HYUNDAI / KIA	37370-03100




HM233

FEATURES:
Regulation: A - Circuit
Voltage Set Point 14.3 V
LIN(COM) Terminals
COM ID Code:25

REFERENCES..

WAI / TRANSPO	M233
AS	ARE3067(VALEO)
MOBILETRON	VR-V8052
WOODAUTO	VAL599233



HM511

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..

YUNYI	13800800 / 08-010
WAI / TRANSPO	M511



HM512

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.60V
L-IG Terminals

REFERENCES..

WAI / TRANSPO	M512
AS	ARE3009
CQ	CQ1010591
MOBILETRON	VR-PR1668



HM514

FEATURES:
Regulation:A-Circuit
Voltage Set Point:14.6V

REFERENCES..

YUNYI	13800500 / 08-007
WAI / TRANSPO	M514
AS	ARE3006
MOBILETRON	VR-PR1669



HM515

FEATURES:
Regulation: B -Circuit
Voltage Set Point 14.8 V
D-D-L-D Terminals
4-Pin connector,but only L used
Active Lamp Function - with output
Without FR Resistor
Without External Sense

REFERENCES..

WAI / TRANSPO	M515
YUNYI	08-045/13810300
MOBILETRON	VR-PR6366
VALEO	2546366C




HM516

FEATURES:
Regulation:B-Circuit
Voltage Set Point： 14.50 V
Soft Start 30 % LRC 5 sec
Field, Lamp Shorted Circuit Protection
Under / Over Voltage Indication
DFM Function

REFERENCES..

YUNYI	13800900 / 08-012
WAI / TRANSPO	M516
AS	ARE3016
MOBILETRON	VR-PR1424H



HM517

FEATURES:
Regulation:B-Circuit
Voltage Set Point： 14.50 V
Soft Start 30 % LRC 5 sec
Field, Lamp Shorted Circuit Protection
Under / Over Voltage Indication
Long screw

REFERENCES..

YUNYI	13800300 / 08-004
WAI / TRANSPO	M517
AS	ARE3007
MOBILETRON	VR-PR002H



HM519

FEATURES:
Regulation:B-Circuit
Voltage Set Point： 14.50 V
Soft Start 30 % LRC 5 sec
Field, Lamp Shorted Circuit Protection
Under / Over Voltage Indication
short screw

REFERENCES..

YUNYI	13800700 / 08-009
WAI / TRANSPO	M519
AS	ARE3019
MOBILETRON	VR-PR6603H



HM520

FEATURES:
Voltage Set Point 14.45 V
Regulation:B-Circuit
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Sense Open Indication
Under / Over Voltage Indication
DFM function

REFERENCES..

YUNYI	13802000 / 08-039
WAI / TRANSPO	M520
AS	ARE3043
MOBILETRON	VR-V2499



HM521

FEATURES:
Voltage Set Point 14.45 V
Regulation:B-Circuit
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Sense Open Indication
Under Voltage Indication
Over Voltage Indication DFM function

REFERENCES..

YUNYI	13800400 / 08-006
WAI / TRANSPO	M521
AS	ARE3010
MOBILETRON	VR-PR2292H




HM523

FEATURES:
Regulation: B -Circuit
Voltage Set Point 14.8 V
Soft Start 32 %
LRC 5 sec
Field, Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

WAI / TRANSPO	M523
YUNYI	08-033/13801700
AS	ARE3038
MOBILETRON	VR-PR2206




HM525

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.4V
Soft Start 30 %
LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication Self exciting function

REFERENCES..

WAI/TRANSPO	M525
YUNYI	13804900/08-070
MOBILETRON	VR-PR3389
VALEO	2542213 2548923 593389




HM529

FEATURES:
Regulation:B-Circuit
Voltage Set Point： 14.50 V
Soft Start 32 % LRC 5 sec
Field Shorted Circuit Protection
Under/Over Voltage Indication
Self exciting function

REFERENCES..

YUNYI	13801500 / 08-031
MOBILETRON	VR-PR9466
WAI/TRANSPO	M529
VALEO	493811 2542521B




HM531

FEATURES:
Regulation:B-Circuit
Voltage Set Point ： 14.50 V
Soft Start 30 %
LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication Self exciting function

REFERENCES..

YUNYI	13803100 / 08-052
WAI / TRANSPO	M531
AS	ARE3059
MOBILETRON	VR-V5001




HM532

FEATURES:
Regulation:B-Circuit
Voltage Set Point： 14.50 V
Soft Start 30 %
LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication Self exciting function

REFERENCES..

VALEO	A0002655023
HYNDAI	37300-22650
MOBILETRON	VR-V024




HM534

FEATURES:
Regulation:B-Circuit
Voltage Set Point :14.50 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Sense Open Indication
Under/Over Voltage Indication
DFM function Self exciting function

REFERENCES..

YUNYI	13803200 / 08-053
WAI / TRANSPO	M534
MOBILETRON	VR-V0030




HM535

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.50 V
Soft Start 30 %
LRC 5 sec
Field Shorted Circuit Protection
Under Voltage Indication
Over Voltage Indication

REFERENCES..

YUNYI	13803600 / 08-057
WAI / TRANSPO	M535
AS	ARE3085
MOBILETRON	VR-PR5023




HM536

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.50 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under/ Over Voltage Indication
DFM Function

REFERENCES..

YUNYI	13804300 / 08-064
WAI / TRANSPO	M536
AS	ARE3090
VALEO	20030410




HM540

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 12 V
F-L Terminals
13.8 Default Vset RVC

REFERENCES..

YUNYI	13803300 / 08-054
WAI / TRANSPO	M540
AS	ARE3083
MOBILETRON	VR-V0441



HM542

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.50 V
Soft Start 30 %
LRC 5 sec
Field Shorted Circuit Protection
Under/ Over Voltage Indication

REFERENCES..

YUNYI	13800100 / 08-001
WAI / TRANSPO	M542
AS	ARE3063
WOODAUTO	VAL595354




HM544

FEATURES:
Regulation:B-Circuit
Voltage Set Point :14.50 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under/Over Voltage Indication
Self exciting function

REFERENCES..

YUNYI	13806400 / 08-085
WAI / TRANSPO	M544/M550
AS	ARE3195
MOBILETRON	VR-V5745




HM546

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.40 V
L-NC Terminals
Active Lamp - With Output Soft Start
Stator or Lamp Activated

REFERENCES..

WAI/TRANSPO	M546
AS	ARE3028
MOBILETRON	VR-PR2299
VALEO	2542299



HM578

FEATURES:
Regulation:B-Circuit
Voltage Set Point :14.50 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under/Over Voltage Indication
Self exciting function

YUNYI	13801800 / 08-035
WAI / TRANSPO	M578
VALEO	593793




HM549

FEATURES:
Regulation: B - Circuit
Voltage Set Point 14.6 V
L- FR Terminals
Soft Start
8.5 sec.LRC
Short Circuit Protection

REFERENCES..

WAI / TRANSPO	M549
AS	ARE3028
MOBILETRON	VR-V3689
VALEO	2542711 2603741 593689



HM524

FEATURES:
Voltage Set Point 14.45 V
Regulation:B-Circuit
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Sense Open Indication
Under / Over Voltage Indication
DFM function

REFERENCES..

YUNYI	13803000 / 08-051
WAI / TRANSPO	M524
MOBILETRON	VR-PR2765
VALEO	2542765 2548154E



HM551

FEATURES:
Regulation:B-Circuit
Voltage Set Point :14.50 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under/Over Voltage Indication
Self exciting function

REFERENCES..

YUNYI	13801300 / 08-020
WAI / TRANSPO	M551
AS	ARE3027
GHIBAUDI	RTR9723




HM556

FEATURES:
Regulation: B -Circuit
Voltage Set Point 14.20 V
C-S-L Terminals
Soft Start 30 % LRC 5 Sec
C Terminal Regulator
Field Shorted Circuit Protection
Self Exciting Function

REFERENCES..

WAI / TRANSPO	M556
YUNYI	1380BG00
MOBILETRON	VR-V0447
ELECTROLOG	REG0101



HM558

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.60 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under/Over Voltage Indication
DFM function Self exciting function

REFERENCES..

YUNYI	13803400 / 08-055
WAI/TRANSPO	M558
AS	ARE3084
MOBILETRON	VR-V0219



HM561

FEATURES:
Regulation:B-Circuit
Voltage Set Point :14.50 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under/Over Voltage Indication
Self exciting function DFM Function

REFERENCES..

YUNYI	13804400 / 08-065
WAI / TRANSPO	M561
AS	ARE3054
WOODAUTO	VRG47354




HM562

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.50 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under/ Over Voltage Indication
DFM function with duty cycle limitation
Self exciting function

REFERENCES..

YUNYI	13801600 / 08-032
WAI / TRANSPO	M562
AS	ARE3030S
GHIBAUDI	RTR9748OE




HM563

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.50 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under/ Over Voltage Indication
DFM Function

REFERENCES..

YUNYI	13804200 / 08-063
WAI / TRANSPO	M563
AS	ARE3089
MOBILETRON	VR-PR5011




HM564

FEATURES:
Regulation:B-Circuit
Voltage Set Point： 14.50 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under/ Over Voltage Indication
Self exciting

REFERENCES..

YUNYI	13801100 / 08-018
WAI / TRANSPO	M564
AS	ARE3020
MOBILETRON	VR-V3419




HM593

FEATURES:
Regulation:B-Circuit
Voltage Set Point ： 14.50 V
Soft Start 30 % LRC 5 Sec
C Terminal Regulator
Field Shorted Circuit Protection
Self Exciting Function

REFERENCES..

YUNYI	1380B200
WAI / TRANSPO	M593
AS	ARE3098
MOBILETRON	VR-V3530




HM608

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 13.8V
Soft Start
LRC 2.5 sec
DFM function RVC Regulator

REFERENCES..

YUNYI	13804800 / 08-069
WAI / TRANSPO	M608
MOBILETRON	VR-V5460
VALEO	2605460.2616783.702152




HM611

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.50 V
Soft Start 30 % LRC 5 sec
Field Shorted Circuit Protection
Under/ Over Voltage Indication
DFM Function

REFERENCES..

WAI / TRANSPO	M611
AS	ARE3224S
VALEO	2608326B
HYUNDAI / KIA	37370-2B250




HM612

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.50 V
Soft Start 30 % LRC 5 Sec
C Terminal Regulator
Field Shorted Circuit Protection
Self Exciting Function DFM Function

REFERENCES..

YUNYI	1380B200
WAI / TRANSPO	M612
AS	ARE3098
MOBILETRON	VR-V3530




HM612-1

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.50 V
Soft Start 30 % LRC 5 Sec
C Terminal Regulator
Field Shorted Circuit Protection
Self Exciting Function DFM Function

REFERENCES..

GPD	HM612-1




HM613

FEATURES:
Regulation: B -Circuit
Voltage Set Point 14.5 V
C-L-FR Terminals
Soft Start
Short Circuit Protection
Regulated Voltage Control(RVC)

REFERENCES..

WAI / TRANSPO	M613
YUNYI	1380C400
AS	ARE9139S
MOBILETRON	VR-V7052



HM614

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.50 V
Soft Start 30 %
C Terminal Regulator
Field Shorted Circuit Protection
Self Exciting Function DFM Function

REFERENCES..

YUNYI	1380BF00
WAI / TRANSPO	M614
MOBILETRON	VR-V9938
VALEO	2609938




HM618

FEATURES:
Regulation: B -Circuit
Voltage Set Point 14.1 V
LI -RC -AS Terminals
Stator Activated

REFERENCES..

WAI / TRANSPO	M618
YUNYI	1380BL00
VALEO	599121
OEM NO :	IA7040




HM680

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.2V
L-FR Terminals
Stator or Light Activated
Soft Start LRC Function
Under Voltage/ Over Voltage Lamp
Active Lamp - With Output

REFERENCES..

WAI / TRANSPO	M680
YUNYI	1380BV00
MOBILETRON	VR-V7131



HM633

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.50 V
Soft Start 30 % LRC 3 Sec
C Terminal Regulator
Field Shorted Circuit Protection
Self Exciting Function DFM Function

REFERENCES..

YUNYI	1380BF00
WAI / TRANSPO	M633
MOBILETRON	VR-V9938
VALEO	2609938



HM526

FEATURES:
Regulation:B-Circuit
Voltage Set Point 14.50 V
Soft Start 30 % LRC 3 Sec
Field Shorted Circuit Protection
Self Exciting Function DFM Function

REFERENCES..

YUNYI	
WAI / TRANSPO	M526
MOBILETRON	VR-PR1935
VALEO	2541935B 593342



HM601

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.3V LIN 1.3
COM01: LIN 1-1
COM02: LIN1-A-4 B
9600 & 19200 Baud Rate (4 Byte)
ID Code:41

REFERENCES..

WAI / TRANSPO	M601
VALEO	2617078B 2618056
MOBILETRON	VR-V8056



HM609

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.3V LIN 2.0
COM01: LIN 2-1
COM02: LIN2-H-2F
9600 & 19200 Baud Rate (4 Byte)
ID Code: 9

REFERENCES..

YUNYI	1380BK00
WAI / TRANSPO	M609
VALEO	2618689 599260
MOBILETRON	VR-V8689



HM236

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.3V LIN 1.3
COM01: LIN 1-1
COM02: LIN1-A-4 B
9600 & 19200 Baud Rate (4 Byte)
ID Code:73

REFERENCES..

WAI / TRANSPO	M236
VALEO	2618058M 599236
MOBILETRON	VR-V8058



HM8869

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.3V LIN 1.3
COM01: LIN 1-1
COM02: LIN1-A-4 B
9600 & 19200 Baud Rate (4 Byte)
ID Code: 57

REFERENCES..

VALEO	2618349B/2618869
MOBILETRON	VR-V8869



HM571

FEATURES:
Regulation:B-Circuit
Voltage Set Point: 14.3V
ID Code: 44

REFERENCES..

YUNYI	13802830
WAI / TRANSPO	M571
MOBILETRON	VR-V8237
VALEO	2608237 595253




HM6120

FEATURES:
A-Circuit
Voltage Set Point 14.50 V

REFERENCES..

WAI / TRANSPO	M6120
VALEO	493820
MOTOROIA	9RC6120



HM506

FEATURES:
A-Circuit
Voltage Set Point 14.10 V

REFERENCES..

YUNYI	13820800/08-028
WAI / TRANSPO	M506
MOBILETRON	VR-VW005N
VALEO	2521760 2521766



HM507

FEATURES:
A-Circuit
Voltage Set Point 14.50 V

REFERENCES..

YUNYI	13820800/08-028
WAI / TRANSPO	M507
MOBILETRON	VR-VW005N
VALEO	2521760 2521766



HM508

FEATURES:
A-Circuit
Voltage Set Point 15.0 V

REFERENCES..

YUNYI	13820800/08-028
WAI / TRANSPO	M508
MOBILETRON	VR-VW005N
VALEO	2519124




HP125

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.6V

REFERENCES..

YUNYI	13820400 / 08-014
WAI / TRANSPO	IP125
AS	ARE3003
MOBILETRON	VR-PR1925H




HP126

FEATURES: Regulation:A-Circuit
Voltage Set Point:28.4V

REFERENCES..

YUNYI	13820700 / 08-021
WAI / TRANSPO	IP126
AS	ARE3048
MOBILETRON	VR-PR128B



HP129B

FEATURES: Regulation:A-Circuit
Voltage Set Point:27.5V

REFERENCES..

WAI / TRANSPO	IP129B
AS	ARE3013
MOBILETRON	VR-PR135B
GAUSS	GA929




HP729B

FEATURES: Regulation:A-Circuit
Voltage Setpoint: 27.5 V

REFERENCES..

WAI / TRANSPO	IP729B
AS	ARE3334S
GAUSS	GA929
MOBILETRON	VR-PR3729A




HP736

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.50V

REFERENCES..

YUNYI	13821100
TRANSPO	IP736
ASE	ARE3109
MOBILETRON	VR-PR7736




HP1639

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.4V

REFERENCES..

WAI / TRANSPO	IP1639
AS	ARE3011
CARGO	131146
MOBILETRON	VR-PR126




HP1652

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.4V

REFERENCES..

YUNYI	13820500 / 08-015
WAI / TRANSPO	IP1652
AS	ARE3004
WOODAUTO	VRG4655




HW700

FEATURES: Regulation:A-Circuit
Voltage Set Point:28.6V

REFERENCES..

YUNYI	13350800/03-061
WAI / TRANSPO	IW700
AS	ARE6058
MOBILETRON	VR-H2002-1




HW700A

FEATURES: Regulation:A-Circuit
Voltage Set Point:28.6V

REFERENCES..


YUNYI	13350800/03-061
AS	ARE6058
DENSO	126000-3270
MOBILETRON	VR-H2002-1



HRR141

FEATURES: Regulation:B-Circuit
Voltage Set Point:14.3V


REFERENCES..
ELVAC E-141-UT



HR251

FEATURES: Regulation:A-Circuit
Voltage Set Point 28.4 V


REFERENCES..
GPD H-FTD251



HR001

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V

REFERENCES..
GPD HR001



HR002

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V


REFERENCES..
GPD HR002



HRR144

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.30V


REFERENCES..
GPD HRR144
GPD HR2512C1



HRR1506

FEATURES: Regulation:A-Circuit
Voltage SetPoint 14.50V


REFERENCES..
GPD HRR1506



HRR1929C

FEATURES: Regulation:A-Circuit
Voltage Set Point:14.5V


REFERENCES..
JHECO JFZ1929C
MOBILETRON VR-V024



JFZ172AE

FEATURES: Regulation:A-Circuit
Voltage Setpoint: 14.4 V


REFERENCES..
GPD HXK172AE



H-XT019

FEATURES: Regulation:A-Circuit
Voltage Set Point 29.30 V

REFERENCES..
YUNYI 13530400 / 12-003



H-XT030

FEATURES: Regulation:A-Circuit
Voltage Set Point 28.00V
Field, Lamp Shorted Circuit Protection
Over Voltage Indication
With Battery Operation


REFERENCES..
CTA 2522B



H-XT032

FEATURES: Regulation:A-Circuit
Voltage Set Point 28.5V


REFERENCES..
OEM NO : 8LHA3013



JFZ173AE

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.50 V


REFERENCES..
GPD JFZ173AE



JFZ231

FEATURES: Regulation:A-Circuit
Voltage Set Point:28.2V


REFERENCES..
GPD JFZ231



JFZ1221

FEATURES: Regulation: A—Circuit
Voltage Set Point 14 V

REFERENCES..
OEM NO S11-1RD3701111



JFZ1711

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.5V


REFERENCES..
OEM NO JFZ1711
OEM NO IK5042
OEM NO JA500C03801



JFZ1712

FEATURES: Regulation:A-circuit
Voltage Set Point 14.50V


REFERENCES..
OEM NO JFZ1712-700
OEM NO JFZ1712B



JFZ1826

FEATURES: Regulation:A-Circuit
Voltage Set Point：14.50 V


REFERENCES..
YUNYI 131Y9300
AS ARE9095
CARGO 333318



JFZ1826G

FEATURES: Regulation:A-Circuit
Voltage Set Point 14.5 V


REFERENCES..
JHECO JFZ1826G



JFZ1927

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.40 V
Soft Start 30 %
Field Shorted Circuit Protection
Under/ Over Voltage Indication


REFERENCES..
GPD JFZ1927



JFZ1929AB

FEATURES:
Regulation: B -Circuit
Voltage Set Point 14.5 V
Soft Start 30% LRC 2.5 Sec
Field Lamp Shorted Circuit Protection
DFM Function
L Terminal DriVe Choke
Self Exciting Function


REFERENCES..
YUNYI 1313DX00



JFZ1929AC

FEATURES:
Regulation:A-Circuit
Voltage Set Point：14.50 V


REFERENCES..
OEM NO :



JFZ1929E

FEATURES:
Regulation:A-Circuit
Voltage Set Point 14.5 V


REFERENCES..
JHECO JFZ1929E



JFZ1945

FEATURES:
Regulation: A - Circuit
Voltage Set Point 14.5 V


REFERENCES..
OEM NO : JFZ1945



JFZ2720

FEATURES:
Regulation: A - Circuit
Voltage Set Point 28.4 V

REFERENCES..
GPD JFZ2720



M5-237A

FEATURES:
Regulation:B-Circuit
Voltage Setpoint: 14.4 V
Terminal Identification: Red-Positive(+),
Black-Ground, Green-Field,Yellow-Stator Adjustable voltage


REFERENCES..
DEIEO 10459555
kMACK TRUCK 2472110255A
CUMMINS 3675200RX



HRR146

FEATURES:
A-Circuit
Voltage Set Point 28.40 V


REFERENCES.. 21Q6-42001
YUNYI 1380DF00



HRR2404

FEATURES:
Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
OEM NO S34-025
OEM NO 1340AA02
UTM RQ8345A
ZAUFER 310N10471Z



HRR2405

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..
GPD HRR2405



HRR2406

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.5V

REFERENCES..
GPD HRR2406



JFZ1935

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
GPD JFZ1935



HRR2407

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
OEM NO JFZ177A-600



HRR2408

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
OEM NO JFZ156
OEM NO JFZ719-700
YUNYI S31-044/1332AE02
UTM RQ9644A



HRR2507

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.3V


REFERENCES..
GPD HRR2507



HRR2425

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14V

REFERENCES..
GPD HRR2425

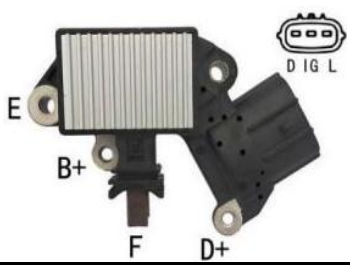

HRR2426

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14V

REFERENCES..
OEM NO JFZ179E
ZAUFER: 310N11052



HRR2428

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.3V

REFERENCES..
GPD HRR2428



HRR2430

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.5V

REFERENCES..

KRAUF	ARQ9517AD
UTM	RQ9517A
ZAUFER	310N10388Z
ZAUFER	ALQ2706UW



HMP291

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

MAGNETON	134291/134541
MOBILETRON	VRMP134
OEM NO	443930136111
OEM NO	443930134291




HMP293

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.2V

REFERENCES..

CARGO	137357
KRAUF	ARG7357AD
WAI / TRANSPO	MP293
MOBILETRON	0134731/0143491



HRR2416

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HRR2416



HRR2417

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28V

REFERENCES..

GPD	HRR2417



HRR2418

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28V

REFERENCES..

GPD	HRR2418



HRR2419

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HRR2419



HRR2422

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HRR2422




HRR2421

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

GPD	HRR2421

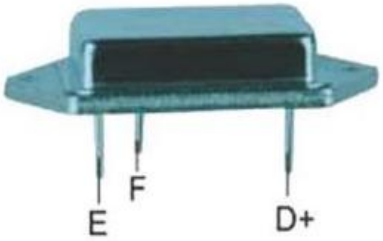

HRR2431

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
OEM NO 奥博 JFZ1999B/BN1/BN2（90/120A）发电机



HRR2432

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.5V

REFERENCES..
奥博(55/70A)发电机



HRR2433

FEATURES: Voltage Set Point:14V

REFERENCES..
GPD HRR2433



HRR2440

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..
GPD JFZ172H-600



HRR2441

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14V

REFERENCES..
OEM NO JFZ171H-600



HRR2442

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.3V

REFERENCES..
GPD HRR2442



HRR2449

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.4V

REFERENCES..
KRAUF ARQ1313
OEM NO ALQ2759RN
OEM NO /E4T15B3701010CA



HRR2450

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.4V

REFERENCES..
KRAUF :ALQ3663RN
OEM NO ARQ1200RN



HRR2451

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.4V


REFERENCES..
KRAUF ARQ1419RN
OEM NO 1658913/ALQ8452RN



HRR2452

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.3V


REFERENCES..
OEM NO ARQ1284
OEM NO ALQ3594RN



HRR2454

FEATURES: Regulation:B-Circuit
Voltage Set Point: 13.7V

REFERENCES..
GPD HRR2454



HRR2455

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.3V

REFERENCES..
GPD HRR2455



HRR2456

FEATURES: Regulation:B-Circuit
Voltage Set Point: 14.4V

REFERENCES..
GPD HRR2456



HRR2504

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28V
外 端子功能:P-L

REFERENCES..
OEM NO ARQ5094AD
OEM NO ARQ5094LP
OEM NO ALQ5094WA



HRR2461

FEATURES: Voltage Set Point: 28V

REFERENCES..
GPD HRR2461



HRR2462

FEATURES: Voltage Set Point: 28V

REFERENCES..
OEM NO AC172R(120/140A)
YUNYI S32-025/13902102



HRR2466

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V


REFERENCES..
GPD HRR2466



HRR2467

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.5V

REFERENCES..
OEM NO RQ9549A



HRR2460

FEATURES: Voltage Set Point: 14V

REFERENCES..

OEM NO	HRR2460




HRR2468

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.5V

REFERENCES..

GPD	HRR2468



HRR2505

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.3V

REFERENCES..

GPD	HRR2505



HRR2506

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.4V

REFERENCES..

OEM NO :	JFZ280-0203/3002




HRR2471

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.5V

REFERENCES..

GPD	HRR2471



HRR2472

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.5V

REFERENCES..



HRR2474

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.5V

REFERENCES..

YUNYI	S36-005/13406002
UTM	AVI1365000TP
UTM	AVI1441F11
UTM	AVI144S3001



HRR2475

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V

REFERENCES..

YUNYI	S36-004/13405902
UTM	RP9504A/5272634
UTM	ALP0247/ALP0247ZL
UTM	ALP0589UW/AVIC2002



HRR2476

FEATURES: Regulation:B-Circuit
Voltage Set Point: 28.5V

REFERENCES..


YUNYI	S36-027/13406702



HRR2481

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.5V

REFERENCES..
GPD HRR2481



HRR2484

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.5V

REFERENCES..
OEM NO JFZ2972YA
OEM NO JFZ2972YA1



HRR2502

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.2V


REFERENCES..
OEM NO 8RE34B1-B 24V



HRR2488

FEATURES: Regulation:B-Circuit
Voltage Set Point: 28.5V


REFERENCES..
YUNYI 1342G000
OEM NO 8RL3016C-2A
OEM NO AVi168A3011
OEM NO HEH324J02



HRR2489

FEATURES: Regulation:B-Circuit
Voltage Set Point: 28.5V

REFERENCES..
OEM NO 8RL3018C
OEM NO 310N10339Z
OEM NO ARP4169LP
OEM NO ALP6168LP



HRR2490

FEATURES: Regulation:B-Circuit
Voltage Set Point: 28.3V

REFERENCES..
OEM NO 0272221002
OEM NO ALB8102AN
OEM NO ARB1002LP
YUNYI 1342AC00



HRR2493

FEATURES: Regulation:A-Circuit
Voltage Set Point: 14.5V


REFERENCES..
OEM NO JFZ1120-112



HRR2495

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.5V

REFERENCES..
OEM NO JFZ-255-303



HRR2498

FEATURES: Regulation:A-Circuit
Voltage Set Point: 28.4V
外搭铁 螺栓：M4*8.2 (带衬套）

REFERENCES..
GPD HRR2498



HVR811

FEATURES:
Regulation:B-Circuit
Voltage Set Point:14.3V

REFERENCES..

AS	ARE2101S
NISSAN	23500-16504
NISSAN	23500-16514



HVR551

FEATURES:
Regulation:B-Circuit
Voltage Set Point:14.3V
Activation: Ignition
SYSTEM VOLTAGE: 12

REFERENCES..

WAI/TRANSPO	IN551
WOODAUTO	WOOVRG47225
WOODAUTO	VRG3652
CASCO	CRE40167AS



HVR589

FEATURES:
Voltage Set Point:14V

REFERENCES..

WAI/TRANSPO	IN589
WOODAUTO	VRG3700
CASCO	CRE40177AS




HM5-396

FEATURES:
A-Circuit
Voltage Set Point 27.50V
Field Shorted Circuit
Protection

REFERENCES..

MOBILETRON	VR-VW006
YUNUI	13900500
WAI / TRANSPO	M5-396




HBM340

REFERENCES.. 227100140
BOSCH 1137101025
MOBILETRON IG-D1910H
WAI / TRANSPO BM340




HDM1961

REFERENCES..
MOBILETRON IG-D1961HV
DELCO D1958 D1961
WAI / TRANSPO DM1961




HDM1980

REFERENCES..
MOBILETRON IG-D1980HV
DELCO D1978 D1979 D1980
WAI / TRANSPO DM1980XHD




HMM170

REFERENCES..
MOBILETRON IG-M007
MAZDA B54118V20
WAI / TRANSPO MM170



HMM817

REFERENCES..
MOBILETRON IG-M005
WAI / TRANSPO MM817
MAZDA F82918V20
FORD E8BZ12A297A



HR6001

REFERENCES..

MOBILETRON	BH-ND11
WAI / TRANSPO	39-8203



HR6004

REFERENCES..

YUNYI	14B01000/YD-T029
CARGO	130703 130702 133547



HR6005

REFERENCES..

YUNYI	14B00700/YD-T022
CARGO	135640



HR6006

REFERENCES..

OEM NO	A04CSC29D
DENSO	104210-3512
MOBILETRON	BH-ND06



HR6007

REFERENCES..

YUNYI	14B01900/B-010
WAI / TRANSPO	39-8200



HR6008

REFERENCES..

YUNYI	14B01800/B-009
MOBILETRON	BH-ND03



HR6009

REFERENCES..

MOBILETRON	BH-ND08
YUNYI	14B08900



HR6010

REFERENCES..

OEM NO	021630-0650
YUNYI	14B00100/YD-T004



HR6011

REFERENCES..

OEM NO	021630-0602
YUNYI	14B00500/YD-T014



HR6012	HR6014	
FEATURES: **REFERENCES..** **MOBILETRON** BH-M03 **FIT UNITS** A5TZ0091 	**FEATURES:** **REFERENCES..** **GPD** HR6014 	

HIM39-8304

FEATURES: Terminal Block

OEM NO :
YUNYI
WAI / TRANSPO 39-8304
MOBILETRON TB-M146



HIM39-8305

FEATURES: Terminal Block


OEM NO :
YUNYI
WAI / TRANSPO 39-8305
MOBILETRON TB-M001



HIM39-8306

FEATURES: Terminal Block

OEM NO :
YUNYI
WAI / TRANSPO 39-8306
MOBILETRON



HN82200

FEATURES: Terminal Block


OEM NO :
YUNYI
WAI / TRANSPO 46-82200
MOBILETRON



HN82207

FEATURES: Terminal Block

OEM NO :
YUNYI 14T04200/T-019
WAI / TRANSPO 46-82207
MOBILETRON TB-ND163



HN82208

FEATURES: Terminal Block

OEM NO :
YUNYI
WAI / TRANSPO 46-82208
MOBILETRON



HP421

FEATURES:

REFERENCES..
YUNYI 14T00400/YD-T006
WAI / TRANSPO INP421
AS ARE6086
MOBILETRON TB-ND097



HBR200

FEATURES: Diodes:6-50A Avalanche
Diameter OD:120 mm
With M8*22 Battery post L
With M8*32 Battery post R

REFERENCES

YUNYI	12431500
WAI / TRANSPO	IBR200
AS	ARC0104
WOODAUTO	RTF39805



HBR201

FEATURES: Diodes:6-50A Avalanche
Diameter OD:120 mm
With M8*22 Battery post L
With M8*32 Battery post R

REFERENCES

YUNYI	12431400 / BHP12025-1
WAI / TRANSPO	IBR201
AS	ARC0043
WOODAUTO	RTF39810



HBR202

FEATURES: Diodes:6-50A Avalanche
Diameter OD:120 mm
With M8*32 Batt. Term.L
With M8*22 Auxiliary Term. R

REFERENCES

YUNYI	12432200 / BHP12032
WAI / TRANSPO	IBR202
AS	ARC0044
MOBILETRON	RB-115H



HBR207

FEATURES: Diodes:6-50A diodes
Diameter OD:120mm
With M8*22 Batt. Term L
With M8*32 Batt Term R
With W-terminal

REFERENCES

YUNYI	12432000 / BHP12030
WAI / TRANSPO	IBR207
AS	ARC0110
BOSCH	F00M133207



HBR208

FEATURES: Diodes: 6-50A Avalanche
Diameter OD: 120mm
With M8 Battery Pos

REFERENCES



HBR215

FEATURES: Diodes:6-60A Avalanche
Diameter OD:129 mm
With M8*22 Battery post L
With M8*32 Battery post R

REFERENCES

YUNYI	12436200 / BHP12073
WAI / TRANSPO	IBR215
AS	ARC0065
MOBILETRON	RB-929H



HBR216

FEATURES: Diodes:6-80A press-fit avalanche diodes,20-24V,

REFERENCES

MOBILETRON	RB-166H
BOSCH	F00M133276
BOSCH	F00M133330



HBR222

FEATURES: Diodes: 6-50A Avalanche
Diameter OD: 120mm
With M6*M6* 38 Battery Post
With M8*1.25 Battery Post

REFERENCES

WAI/TRANSPO	IBR222
BOSCH	F00M133222
LESTER	13860



HBR223

FEATURES: Diodes:6-50A Avalanche
Diameter OD:120 mm
With M8*32 Battery post L
With M8*32 Battery post R

REFERENCES

YUNYI	12432900 / BHP12039B
WAI / TRANSPO	IBR223
AS	ARC0048
MOBILETRON	RB-115H



HBR224

FEATURES:
Diodes: 6-50A Avalanche
Diameter OD: 120mm
With M8*32 Battery Post(L)
With M8*22 Battery Post(R)
For 24V Alternators

REFERENCES

YUNYI	12435700/BHP12069B
WAI/TRANSPO	IBR224
AS	ARC0068
MOBILETRON	RB-117H



HBR230

FEATURES:
Diodes: 8-50A Avalanche
Diameter OD: 120mm
With M8*32 Battery Post

REFERENCES

YUNYI	12435000/BHP12062(Y)
WAI/TRANSPO	IBR230
BOSCH	F00M123313
LESTER	21504



HBR233

FEATURES:
Diodes: 6-50A Avalanche
Diameter OD: 120mm
With M6 * 1.0 Battery Post
With M8 * 1.25 Battery Post

REFERENCES

YUNYI	12430400/BHP12017（Y）
WAI/TRANSPO	IBR233
AS	ARC0095
BOSCH	0124315019



HBR237

FEATURES:
Diodes: 6-50A Avalanche
Diameter OD: 130mm
With M8*38 Battery Post

REFERENCES

YUNYI	12432700/BHP12037(△)
WAI/TRANSPO	IBR237
AS	ARC0253S
BOSCH	F00M133237



HBR2237

FEATURES:
SPECS:12 Volt
SPECS FOR:Bosch 125A
IR/IF Alternators

REFERENCES

WAI/TRANSPO	IBR2237
BOSCH	F 00M 123 202
BOSCH	F 00M 123 203



HBR244

FEATURES:
Diodes:6-50A Avalanche
Diameter OD:120 mm
With M8*22 Battery post L
With M8*32 Battery post R

REFERENCES

YUNYI	12435800 / BHP12070
WAI / TRANSPO	IBR201
AS	ARC0090
MOBILETRON	RB-116H



HBR251

FEATURES:
Diodes: 6-60A dioes
Diameter OD: 130mm
With M8*38 Battery Post

REFERENCES

WAI/TRANSPO	IBR251
LESTER	23254
LESTER	23257



HBR257

FEATURES:
Diodes: 6-60A Avalanche
Diameter OD: 130mm
With M8*38 Battery Post
With M8*22 Battery Post

REFERENCES

YUNYI	12431740/BHP12056
WAI/TRANSPO	IBR257
AS	ARC0152
VW	038903359F



HBR266

FEATURES:
Diodes: 6-50A Avalanche
Diameter OD: 130mm
With M8*22 Battery Post(L)

REFERENCES

WAI/TRANSPO	IBR266
AS	ARC0052
WOODAUTO	RTF39806
AS-PL	UD10854ARC



HBR301

FEATURES: Diodes:6-40A Diodes
Diameter OD: 114mm
With M6*33 Batt. Term.
With W-Terminal.
With diode trio.

REFERENCES

YUNYI	12421300 / BHP11412
WAI / TRANSPO	IBR301
AS	ARC0001
CQ	CQ1080255



HBR302

FEATURES: Diodes: 6-35A Diodes
Diameter OD: 114mm
With Trio

REFERENCES

YUNYI	12421200 / BHP11411
WAI / TRANSPO	IBR302
AS	ARC0002
WOODAUTO	RTF3978



HBR303

FEATURES: Diodes: 6-40A Diodes
Diameter OD: 114mm
Without “W”Terminal
With Trio

REFERENCES

YUNYI	12420600 / BHP11404
WAI / TRANSPO	IBR303
AS	ARC0003
CQ	CQ1080554



HBR304

FEATURES: Diodes: 6-40A Diodes
Diameter OD: 114mm
With M6*33 Battery Post
With Trio

REFERENCES

YUNYI	12421500 / BHP11413
WAI / TRANSPO	IBR304
AS	ARC0004
MOBILETRON	RB-02H



HBR307

FEATURES: Diodes:6-35A diodes
Diameter OD: 90mm
With M6*33 Batt. Term.
With trio.

REFERENCES

YUNYI	1242B400 / BHP9003
WAI / TRANSPO	IBR307
AS	ARC0061
MOBILETRON	RB-13H



HBR311

FEATURES: Diodes: 6-35A diodes
Diameter OD: 114mm
With M8*30 Batt. Term
With M5*20 D+ Term
With Trio

REFERENCES

YUNYI	12420800 / BHP11406
WAI / TRANSPO	IBR311
AS	ARC0005
WOODAUTO	RTF3971A



HBR313

FEATURES: Diodes: 6-35A diodes
Diameter OD: 114mm
With M4*19 D+ Terminal (Trio)
With M5*19 W- Terminal
With M6*33 Battery Terminal
With Trio

REFERENCES

YUNYI	12420100 / BHP11401
WAI / TRANSPO	IBR313
AS	ARC0006
MOBILETRON	RB-08H



HBR314

FEATURES: Diodes: 6-35A Diodes
Diameter OD: 114mm
With M6*33 Battery Post
With M4*19 Trio Post
With M5*19 W-Post
With Trio

REFERENCES

YUNYI	12420200 / BHP11402
WAI / TRANSPO	IBR314
AS	ARC0007
CQ	CQ1080428



HBR315

FEATURES: Diodes: 6-35A Avalanche
Diameter OD: 114mm
With M8*33 Battery Post
With M4*19 Trio Post
With M5*19 W-Post
With Trio

REFERENCES

YUNYI	12420400/BHP11403
WAI/TRANSPO	IBR315
AS	ARC0008
CQ	CQ1080623



HBR316

FEATURES:
Diodes:6-40A Diodes
Diameter OD:114mm
With M8*30mm Battery Post
With M5*20mm Trio Post
With Trio

REFERENCES

YUNYI	12421600 / BHP11414
WAI / TRANSPO	IBR311
AS	ARC0009
WOODAUTO	RTF39717



HBR317

FEATURES:
Diodes:6-35A Diodes
Diameter OD:114mm
With Aux-Post
With M5*20"W"-Post
With Trio

REFERENCES

YUNYI	12421700 / BHP11415
WAI / TRANSPO	IBR317
AS	ARC0037
WOODAUTO	RTF39718



HBR318

FEATURES:
Diodes: 6-35A Diodes
Diameter OD:90 mm
With Trio
With B+ Spade Terminal

REFERENCES

YUNYI	1242B200 / BHP9001
WAI / TRANSPO	IBR318
AS	ARC0045
MOBILETRON	RB-10H



HBR320

FEATURES:
Diodes:6-40A Diodes
Diameter OD:114mm
With M6*33mm Battery Post
With M5*19 Trio-Post
With W-Post
With Trio

REFERENCES

YUNYI	12421800 / BHP11416
WAI / TRANSPO	IBR320
ASE	ARC0011
CQ	CQ1080659



HBR321

FEATURES:
Diodes:6-40A Diodes
Diameter OD:114mm
With M6*19,M8*22 Battery Post
With M5*19 Trio-Post
With Trio

REFERENCES

WAI / TRANSPO	IBR321
AS	ARC0201S
CQ	90350013
MOBILETRON	RB-19H



HBR324

FEATURES:
Diodes:8-35A Avalanche
Diameter OD:114mm
With M8*33 Battery Post
With M5*19 Trio-Post
With W-Terminal
With Trio

REFERENCES

YUNYI	12423510/BHP11427A
WAI / TRANSPO	IBR324
AS	ARC0093
MOBILETRON	RB-80H



HBR340

FEATURES:
Diodes:14-35A Diodes
Diameter OD:125mm
With M8*33 Battery Terminal
With M4*22 Trio Post
With M6*33 Ground Post
With diode trio

REFERENCES

YUNYI	1242A700 / BHP12510
WAI / TRANSPO	IBR340
AS	ARC0016
MOBILETRON	RB-72H



HBR341

FEATURES:
Diodes:14-35A Diodes
Diameter OD:125mm
With M8*33 Battery Terminal
With M4*22 Trio Post
With M6*33 Ground Post
With M5 W-Post With diode trio

REFERENCES

YUNYI	1242A400 / BHP12509
WAI / TRANSPO	IBR341
AS	ARC0017
MOBILETRON	RB-72H



HBR350

FEATURES:
Diodes:8-50A Diodes
Diameter OD:120mm
With M8*33 Battery Post
With W-Terminal
With Trio

REFERENCES

YUNYI	12426200 / BHP121001
WAI / TRANSPO	IBR350
AS	ARC0018
MOBILETRON	RB-76H



HBR351

FEATURES: Diodes:8-5A Diodes
Diameter OD:120mm
With M8*33 Battery Post
With Trio

REFERENCES

YUNYI	12426300 / BHP121002
WAI / TRANSPO	IBR351
AS	ARC0019
MOBILETRON	RB-51H



HBR353

FEATURES: Diodes:8-50A Diodes
Diameter OD:120mm
With M8*33 Battery Post
With M5*20 Trio-Post
With M5*20 W-Post

REFERENCES

YUNYI	12426500 / BHP121004
WAI / TRANSPO	IBR353
AS	ARC0020
MOBILETRON	RB-53H



HBR354

FEATURES: Diodes:8-50A Diodes
Diameter OD:120mm
With M8*33 Battery Post
With M5*20 Trio Post

REFERENCES

YUNYI	12426600 / BHP121005
WAI / TRANSPO	IBR354
AS	ARC0021
MOBILETRON	RB-54H



HBR355

FEATURES: Diodes:6-50A Diodes
Diameter OD:120mm
With M8*33 Battery Post
With M5*20 Trio Post

REFERENCES

YUNYI	12427200/BHP121011
WAI / TRANSPO	IBR355
AS	ARC0022
MOBILETRON	RB-55H



HBR517

FEATURES: Diodes:8-50 Ampere
Diameter OD:125mm
With (M8+M6) ×54.6mm Battery Post
With M4×32.5mm Trio Post
With M6×52mm Ground Post
With Trio

REFERENCES

WAI / TRANSPO	IBR517
BOSCH	1127320517
YUNYI	1242AH00/BHP12519



HBR547

FEATURES: Diodes:14-40A Diodes
Diameter OD:145mm
With M8*33 Battery Post
With M8*33 Ground Post
With M5*25“W”Post

REFERENCES

YUNYI	1242AM00/BHP14502
WAI / TRANSPO	IBR547
AS	ARC0038
MOBILETRON	RB-78H



HBR550

FEATURES: Diodes:12-40A Diodes
Diameter OD:145mm
With M8*33 Battery Post
With M5*25 Trio Post
With M8*33 Ground Post
With 3-35A Diode Trio

REFERENCES

YUNYI	1242AL00
WAI / TRANSPO	IBR550
AS	ARC0078
MOBILETRON	RB-78HA



HBR590

FEATURES: Diodes:8-50A Diodes
Diameter OD:125mm
With M8*22/M6*19 Battery Post
With M4*22 Trio Post
With M6*33 Groud Post
With M5*29 W-post

REFERENCES

YUNYI	12429500 / BHP12501
WAI / TRANSPO	IBR590
AS	ARC0024
MOBILETRON	RB-63H



HBR667

FEATURES: Diodes:6-40A Diodes
Diameter OD:114mm
With M6*33 Battery Post
With M5*20“W”Post
With M4*20 Trio Post
With Trio

REFERENCES

YUNYI	12422100 / BHP11419
WAI / TRANSPO	IBR667
AS	ARC0062
MOBILETRON	RB-38H



HBR668

FEATURES:
Diodes:8-40A Diodes
Diameter OD: 114mm
With M6*33 Battery Post
With M5*25 Auxiliary Post
With Trio

REFERENCES

WAI / TRANSPO	IBR668
BOSCH	9128040953J
BOSCH	9128040953
MOBILETRON	RB-85H



HBR713

FEATURES:
Diodes: 6-50A Diodes
Diameter OD: 120mm
With M8/M6 Battery Post
With M5 Trio Post
With Trio

REFERENCES

YUNYI	12427100/BHP121010
WAI/TRANSPO	IBR713
AS	ARC0027
MOBILETRON	RB-59H



HBR753

FEATURES:
Diodes:8-50A Diodes
Diameter OD:120mm
With M8*33 Battery Post
With M4*20 Trio Post
With M5*20 W-Post

REFERENCES

YUNYI	12427400 / BHP121013
WAI / TRANSPO	IBR753
AS	ARC0050
MOBILETRON	RB-93H



HBR824

FEATURES:
Diodes:12-35A Avalanche
Diameter OD:122mm
With M8*20 Battery Post
With M5*8 Trio Post
With “W” Terminal

REFERENCES

YUNYI	12403000/BHP12201-1(Y)
WAI / TRANSPO	IBR824
BOSCH	1127319029
LESTER	13359



HBR834

FEATURES:
Diodes:14-35A Avalanche
Diameter OD:122mm
With M8*20 Battery Post
With M5*8 Trio Post
With W-Terminal

REFERENCES

YUNYI	12402900/BHP12201 (Y)
WAI / TRANSPO	IBR834
AS	ARC0041
BOSCH	1127319552



HBR844

FEATURES:
Diodes:6-50A Avalanche
Diameter OD:112mm
With M8*33mm Battery Post
With M5*20mm Trio Post

REFERENCES

YUNYI	12400700/BHP11204 (Y)
WAI / TRANSPO	IBR844
AS	ARC0029
BOSCH	1127320807



HBR850

FEATURES:
Diodes:8-50A Avalanche
Diameter OD:112mm
With M8*33 Battery Post
For >90A Alternators

REFERENCES

YUNYI	12400600/BHP11203 (Y)
WAI / TRANSPO	IBR850
AS	ARC0030
MOBILETRON	RB-24H



HBR852

FEATURES:
Diodes:6-50A Avalanche
Diameter OD:112mm
With M8*33 Battery Post

REFERENCES

YUNYI	12400100/BHP11201 (Y)
WAI / TRANSPO	IBR852
AS	ARC0185
MOBILETRON	RB-122H



HBR854

FEATURES:
Diodes:8-50A Avalanche
Diameter OD:122mm
With M8×30mm Battery Post
With Trio
For use on:VW Corado, Golf,Passat,Jetta,Eurovan

REFERENCES

WAI / TRANSPO	IBR854
YUNYI	BHP12202
BOSCH	1127319575



HBR860

FEATURES: Diodes:12-50A Avalanche
Diameter OD:124mm
With M8 Battery Post
With M6 Trio Post

REFERENCES

YUNYI	12403300/BHP12204(Y)
WAI / TRANSPO	IBR860
AS	ARC0054
BOSCH	1127319690



HBR882

FEATURES: Diodes:6-50A Avalanche
Diameter OD:112mm
With M8*33 Battery Post
With M6*33 Trio Post

REFERENCES

YUNYI	12401600/BHP11209(Y)
WAI / TRANSPO	IBR882
BOSCH	1127319623
MOBILETRON	RB-101H



HBR903

FEATURES: Diodes:6-40A Avalanche
Diameter OD:114mm
With Trio

REFERENCES

YUNYI	12422200 / BHP11420
WAI / TRANSPO	IBR903
AS	ARC0080
MOBILETRON	RB-86H



HBR904

FEATURES: Diodes:8-50A diodes
Diameter OD: 125mm
With M8*33 BATTERY POST
With M4*22 TRIO POST
With M6*33 GROUND POST
With M5*29 W-POST

REFERENCES

WAI / TRANSPO	IBR904
AS	ARC0032
LESTER	23502
MOBILETRON	RB-64H



HBR954

FEATURES: Diodes: 14-40 A Avalanche
Diameter OD: 125 mm
With M10*44 Battery Post
With M4*22 Trio-Post
With M6*33 Ground Post
With M5*22 W-Post

REFERENCES

YUNYI	12429800 / BHP12504
WAI / TRANSPO	IBR954
AS	ARC0034
MOBILETRON	RB-67H



HBR955

FEATURES: Diodes: 8-40A Avalanche
Diameter OD: 125 mm
With M8*33 Battery Post
With M6*33 Ground post
With M5*29 W-Post
With M4*29 Trio Post

REFERENCES

YUNYI	1242A800 / BHP12511
WAI / TRANSPO	IBR955
AS	ARC0035
MOBILETRON	RB-66H



HBR989

FEATURES: Diodes:8-50A Avalanche
Diameter: 125mm
With M4*22 D+ Term. (Trio)
With M5*29 W–Term.
With M6*33 Grd. Term.
With M8*33 Batt. Term.

REFERENCES

YUNYI	1242A800 / BHP12511
WAI / TRANSPO	IBR989
AS	ARC0036
MOBILETRON	RB-71H



HR1259

FEATURES: Diodes: 6-35A diodes
Diameter OD: 88mm
With Trio

REFERENCES..

YUNYI	
MOBILETRON	



HR1260

FEATURES: Diodes: 6-35A diodes
Diameter OD: 114mm

REFERENCES..



HR1264

FEATURES: Diodes: 6-35A diodes
Diameter OD: 114mm
With Trio

REFERENCES..



HR1326

FEATURES: Diodes: 6-35A diodes
Diameter OD: 114mm

REFERENCES..



HR1328

FEATURES: Diodes: 6-35A diodes
Diameter OD: 114mm

REFERENCES..



HR1362

FEATURES: Diodes: 8-50A diodes
Diameter OD: 112mm
With M8 Battery Post

REFERENCES..



HR1372

FEATURES: Diodes:8-50A Avalanche
Diameter OD:114mm
With M8*50 Battery Post

REFERENCES..

AS	ARC0156
OEM	233519-W
BOSCH	F002G10573
BOSCH	F002G90172



HR2114

FEATURES: Diodes: 3-80A diodes
Diameter OD: 127mm
With M8 Battery Post

REFERENCES..



HBR90321

FEATURES: Diodes: 3-60A Avalanche
Diameter OD: 115.3mm
With M8 * 1.25 Battery Post

REFERENCES

WAI / TRANSPO	IBR90321
MOBILETRON	RB189H
BOSCH	F000BL9028
BOSCH	F000BL9188



HR2123-PY

FEATURES: Diodes: 3-50A Avalanche
With M8*1.25 Battery Post
.

REFERENCES..




HBR40051

FEATURES: 3-60A Avalanche Press Fit
Diodes (20-24V)
Dimensions: M8 B+ Terminal

REFERENCES

WAI / TRANSPO	IBR40051
BOSCH	F-00M-314-005
BOSCH	0-121-615-006
BOSCH	0-121-615-007



HBR40081

FEATURES:
Bosch 180A IR/IF Alternators
Dimensions:
M8 x 1.25 Batt. Term.
Delta Wound Stator Applications
IBR4008 Full Rectifier Assembly
IB6056 Companion Regulator

REFERENCES

BOSCH	F 00M 324 051
BOSCH	F 00M 349 931



HBR40221

FEATURES:
For :
Bosch 150A IR/IF Alternators
Dimensions:
M8 X 1.25 Batt. Term.
Notes:
Used in IBR4022 rectifier assy.
3-60A Avalanche Press Fit Diodes, 20-24V

REFERENCES

WAI / TRANSPO	IBR40221
FIT UNIT	F00M314015



HBR4051

FEATURES:
For :
Bosch IR/IF Alternators
Dimensions:
M8 x 1.25 Batt. Term. x 24.8mm

REFERENCES

WAI / TRANSPO	IBR4051
MOBILETRON	RB-195H
BOSCH	F 00M 599 451



HBR4413

FEATURES:
SPECS:12 Volt, 6-60A Avalanche Press Fit Diodes, 20-24V
SPECS FOR:Bosch IR/IF Alternators

REFERENCES

WAI / TRANSPO	IBR4413



HBR4009

FEATURES:
For :
Bosch IR/IF Alternator
Features:
80A Diodes

REFERENCES

WAI / TRANSPO	IBR4009
BOSCH	F00M349933



HBR4011

FEATURES:
M8 Battery Post
3-50A Avalanche Diodes

REFERENCES

WAI / TRANSPO	IBR4011
MOBILETRON	RB-176HV




HBR40011

FEATURES:
Diodes:6-60A Avalanche
Diameter OD:145mm
With M8×32mm Battery Post
With “W” Terminal
Customer provide Negative heat sink

REFERENCES

WAI / TRANSPO	IBR40011
BOSCH	F00M314001



HR2124-PY

FEATURES:
Diodes: 6-50 A Avalanche

With M8 * 27mm Battery Post

REFERENCES



HR2126-PY

FEATURES:
Diodes:6-50A Avalanche

With M8 * 1.25 * 59mm Battery Post

REFERENCES




HDER1000

FEATURES: Diodes: 6-25A diodes
High Temp Leadframe

REFERENCES..

YUNYI	12122000 /DC5186
WAI / TRANSPO	DER1000
AS	ARC1052S
MOBILETRON	RD-10




HDER1003

FEATURES: Diodes:6-25A diodes

REFERENCES..

YUNYI	12122800 / DCE1003
WAI / TRANSPO	DER1003
AS	ARC1025
MOBILETRON	RD-18




HDER1004

FEATURES: Diodes: 6-35 Ampere Button

REFERENCES..

WAI / TRANSPO	DER1004
MOBILETRON	RD-20H
YUNYI	DCE1004



HDER2000

FEATURES: Diodes: 6-50 A Avalanche
3.0 Amp Trio Assembly
With M8*1.25mm Battery post installed
With Aluminum Heat sinks
Copper Negative Heatsink

REFERENCES..

YUNYI	12103020 / DCE5173
WAI / TRANSPO	DER2000
AS	ARC1002
MOBILETRON	RD-04B




HDR162

FEATURES: Diodes:6-25A diodes
Dimension:17.5mm Thick

REFERENCES..

WAI / TRANSPO	IDR162
LUCAS	21220368
INTRRMOTOR	62342
JA·ELECTRO OY	17·28035




HDR197

FEATURES: Diodes:6-25A diodes
Dimension:17.5mm Thick
For Trio Installed Use IDR560
Like IDR162 except Reverse Polarity

REFERENCES..

YUNYI	12700500 / MG6906
WAI / TRANSPO	IDR197
AS	ARC4029
DELCO	606625




HDR560

FEATURES: Diodes:6-25A diodes
Dimension:17.5mm Thick
With Trio

REFERENCES..

YUNYI	12700800 / MG6908
CARGO	130633
AS	ARC4031
DELCO	21220366



HDR1200

FEATURES: 40A press-fit avalanche diodes
Welded diode terminations
Hi-temperature lead frame

REFERENCES..

MOBILETRON	RD-25A
WAI / TRANSPO	DR1200



HDR4000

FEATURES: Diodes: 6-50A Avalanche
Diodes (GPP) Glass Passivated
Patent Pending, Vacuum Oven, Void-Free Welded Connections
High Temperature Leadframe
Patented "Ram-Air" tm Aluminium Heat Sink

REFERENCES..

YUNYI	12105600 / DC5302-1
WAI / TRANSPO	DR4000
AS	ARC1005
MOBILETRON	RD-95A



HDR4001

FEATURES: Diodes: 6-50A diodes
Diameter OD: 102mm

REFERENCES..



HDR4003

FEATURES: Diodes: 6-50A diodes
Diameter OD: 102mm

REFERENCES..

OEM NO	10456401
MOBILETRON	RD-96



HDR4200

FEATURES: Diodes:6-50A Avalanche
With M8*1.25mm Batt. Term.
OE validated Welded diode

REFERENCES..

YUNYI	12101500 / DC5300
WAI / TRANSPO	DR4200
AS	ARC1006
MOBILETRON	RD-97A



HDR4204

FEATURES: Diodes: 6-50A diodes
Diameter OD: 102mm
With M8 * 1.25 Batt. Term.

REFERENCES..

WAI/TRANSPO	DR4204
YUNYI	DC5302D-1/12105300
DELCO	10475757
DELCO	10475758



HDR4205

FEATURES: Diodes: 6-50A diodes
Diameter OD: 102mm
With M6 * 1.0 Batt. Term.

REFERENCES..

WAI/TRANSPO	DR4205
DELCO	10491097
DELCO	10492837
DELCO	10492838



HDR4220

FEATURES: Diodes: 6-50A diodes
Diameter OD: 102mm
With M6 * 1.0 Batt.Term.

REFERENCES..

WAI/TRANSPO	DR4205
LESTER	8220
DELCO	10491097
DELCO	10492837



HDR4400D

FEATURES: Diodes: 6-50A Avalanche
Diameter OD:117.5mm
With M6 Battery Post

REFERENCES..

YUNYI	12110110/DC6100HD
WAI/TRANSPO	DR4400HD
FIT UNIT	25744165
MOBILETRON	RD-26HD




HDR5000

FEATURES: Diodes: 6-25A diodes

REFERENCES..

WAGNER	D0603
DELCO	1875627
MOBILETRON	RD-09
DELCO	1891055




HDR5040

FEATURES: Diodes: 6-25A Button
Heat sink tunnel for additional air flow to cool diode trio

REFERENCES..

YUNYI	12121700 / DC5185
WAI / TRANSPO	DR5040
AS	ARC1007
MOBILETRON	RD-09




HDR5042

FEATURES: Diodes: 6-50 Ampere Button
Aluminum heatsinks

REFERENCES..

WAI / TRANSPO	DR5042
YUNYI	DC5185HD/12121710
AS	ARC1007
MOBILETRON	RD-09H




HDR5054

FEATURES: Diodes:6-50A Button Diodes
WIth Bidirectional Fins
Note: For heavy duty version w/
70 amp diodes, USE DR5056

REFERENCES..

WAI / TRANSPO	DR5054
MOBILETRON	RD-13HV
YUNYI	12122500/DC5192




HDR5070

FEATURES: Diodes:6-25A Button

REFERENCES..

YUNYI	12120100 / DC5070
WAI / TRANSPO	DR5070
AS	ARC1031
MOBILETRON	RD-14




HDR5080

FEATURES: Diodes: 6-25A Button

REFERENCES..

YUNYI	12121500/DC5184
WAI / TRANSPO	DR5080
AS	ARC1012
MOBILETRON	RD-17



HDR5162

FEATURES: 40A press-fit avalanche diodes, OE validated
Welded diode terminations
Hi-temperature lead frame
Patented "Ram-Air" aluminum heat sink

REFERENCES..

WAI / TRANSPO	DR5162



HDR5166

FEATURES: Diodes:35A diodes
With Trio
Extra Mounting Hole

REFERENCES..

WAI / TRANSPO	DR5166
AS	ARC1020
CQ	CQ1080224
DELCO	262100




HDR5170

FEATURES: Diodes: 6-25A Button
For 17SI 97-108A Alternators

REFERENCES..

YUNYI	12120600/DC5170
WAI/TRANSPO	DR5170
AS	ARC1035
MOBILETRON	RD-15




HDR5172

FEATURES: Diodes: 9-50A Button
6-positive & 3-negative
17SI Series 97-108A IR/EF
Alternators

REFERENCES..

WAI / TRANSPO	DR5172
AS	ARC1035
MOBILETRON	RD-15
DELCO	1985801




HDR5173PF

FEATURES: Diodes:6-70A Jumbo
Non Avalanche,for12v&24V
Systems

REFERENCES..

YUNYI	12122200 / DC5187
WAI / TRANSPO	DR5173PF
MOBILETRON	RD-05




HDR5174

FEATURES: Diodes: 6-50A Avanlanche

REFERENCES..

WAI / TRANSPO	DR5174
YUNYI	12122210/DC5188
MOBILETRON	DR-06
DELCO	10469265




HDR5176PF

FEATURES:
3-60A positive press-fit diodes
3-60A negative press-fit avalanche diodes
Crimp-weld diode connections
Heavy copper conductors
Saw-fin heat sinks

REFERENCES..

WAI / TRANSPO	DR5176PF
DELCO	10456319
DELCO	10456332
DELCO	104670542




HDR5177PF

FEATURES: Diodes: 6-60A Avalanche
Wide Fin Gull Wing Style
Heat Sinks

REFERENCES..

WAI / TRANSPO	DR5177PF
YUNYI	DC5181/12120900
MOBILETRON	RD-06A




HDR5178PF

FEATURES: Diodes:6-60A Avalanche
Wide Fin Gull Wing Style
Heat Sinks
CS144 Alternators

REFERENCES..

YUNYI	12121200/DC5182
WAI / TRANSPO	DR5178PF
MOBILETRON	RD-07




HDR5179PF

FEATURES: Diodes:6-60A Avalanche
Unique Transpo Design
For CS144 Late Style

REFERENCES..

WAI / TRANSPO	DR5179PF
AS	ARC1029
MAGNETI MARE	940038193
DELCO	10472095




HDR5180

FEATURES: SPECS:12 Volt
SPECS FOR:Delco CS144 Series 140A IR/EF Alternators

REFERENCES..

WAI / TRANSPO	DR5180PF
DELCO	10472095
MOBILETRON	RD-08
DELCO	10475800



HDR6871

FEATURES: Diodes: 6-50A Avalanche
With M8 Battery Post
With HD Diode Trio

REFERENCES..

YUNYI	12141500 / DC4100
WAI / TRANSPO	DR6871
AS	ARC9016
DELCO	IAT08790



HDR9410

FEATURES: Diodes: 6-40A diodes
Diameter OD: 100mm
With M6 Battery Post

REFERENCES..

WAI/TRANSPO	DR9410
YUNYI	DC9410/12142000
AS	ARC1034
MOBILETRON	RD-32



HDR9411

FEATURES: Diodes: 6-40A Avalanche
With M6*38 Battery Post
With Trio
With P-Terminal

REFERENCES..

YUNYI	12142100 / DC9411
WAI / TRANSPO	DR9411
AS	ARC1023
CARGO	235028



HR1253

FEATURES: Diodes:3-50A diodes
With M8 * 1.25 Battery Post
With Trio

REFERENCES..

AS	ARC3064
KRAUF	AEV0201



HR1265

FEATURES: Diodes: 6-35A diodes
Diameter OD: 114.5mm
With M6*1.0 Battery Post

REFERENCES..



HR1265C

FEATURES: Diodes: 3-35A diodes
Diameter OD: 100mm
With M8*1.25 Battery Post


REFERENCES..



HR1275

FEATURES: Diodes: 6-50A diodes
Diameter OD: 137mm

REFERENCES..



HR1301

FEATURES: Diodes: 6-50A diodes
Diameter: 102mm
With Trio

REFERENCES..



HR1320

FEATURES: Diodes:6-50A Avalanche
Diameter OD: 113mm
With M8*47.5 Battery Post
Without Trio

REFERENCES..

YUNYI	12140800 / DC1101
WAI/TRANSPO	DR2910
AS	ARC1036
MOBILETRON	RD-37



HR1322A

FEATURES: Diodes: 6-35A Avalanche
Diameter OD: 113mm
With M8*47.5 Battery Post
With M6*21 Battery Post
With Trio

REFERENCES..

YUNYI	12141000 / DC1103
WAI / TRANSPO	DR2206
AS	ARC1038
CARGO	333815




HR1476

FEATURES: Diodes:3-50A Avalanche
Without Trio
With M8*1.25 Battery Post
Without negative heat sink

REFERENCES

YUNYI	12803200 / VAL206H
AS	ARC3055
CARGO	332114
VALEO	2650035



HR1513

FEATURES: Diodes: 3-50A Avalanche
With M8*1.25 Battery Post
Without Trio

REFERENCES..

YUNYI	1280AT00 / VAL9018H
WAI / TRANSPO	MER523
AS	ARC3075
MOBILETRON	RP43



HR1515

FEATURES: Diodes: 3-50A Avalanche
Without Trio
With M8*1.25 Battery Post
Without negative heat sink

REFERENCES..

YUNYI	12802300 / VAL205H
WAI / TRANSPO	MER528
AS	ARC3039
MOBILETRON	RP-62



HR1602

FEATURES: Diodes:6-50A Avalanche
With M8*1.25 Battery Post

REFERENCES..




HFR192HD

FEATURES:
Diodes: 6-50A diodes
Diameter OD: 66mm
Ford 2G Series 40-80A IR/EF Alternators

REFERENCES..

WAI/TRANSPO	FR192HD
FORD	E6DZ10304
MOTORCRAFT	GY1360
MOBILETRON	RF-02




HFR192PF

FEATURES:
Diodes:50 Ampere Press-Fit
Custom Transpo Design
Improved Heat Dissipation
Hi-Temp BBS Receptacle
Crimp&Welded Diode Terminatyion
Exceptional Endurance & Quality

REFERENCES..

WAI / TRANSPO	FR192PF
AMSCO	AMSCO
AMSCO	FD40H
ACE·ELECTRIC	S1201



HFR201

FEATURES:
Diodes:8-50A diodes
Diameter OD: 133mm
With M6*1.0 Battery Post
Crimp-weld diode terminations
Heavy duty copper connections reduce high-amp heat generation
Pre-tinned terminals improves solder-ability

REFERENCES..

YUNYI	12200100 / FD3001DW
WAI / TRANSPO	FR201
AS	ARC9010
MOBILETRON	RF-04A



HFR202

FEATURES:
Diodes:8-50A diodes
Diameter OD: 147mm
With M6*1.0 Battery Post
With capacitor
With Aluminum heat sink

REFERENCES..

YUNYI	12200200 / FD3002DW
WAI / TRANSPO	FR202
AS	ARC9011
MOBILETRON	RF-05A



HFR300

FEATURES:
Diodes:8-50A diodes
Diameter OD:133mm
With M6 * 1.0 Battery Post
OE-Style Leadframe
For 130A Applications

REFERENCES..

YUNYI	12210700 / FD4001DW
WAI / TRANSPO	FR300
AS	ARC9012
MOBILETRON	RF-063



HFR600

FEATURES:
Diodes: 8-50A diodes
Diameter OD:136mm
With M6*1.0 Battery Post
Drop-down Stator Terminals

REFERENCES..

YUNYI	12220200 / FD6000DW(Y)
WAI / TRANSPO	FR600
AS	ARC9013
MOBILETRON	RF-10



HFR601

FEATURES:
Diodes: 8-50A diodes
Diameter OD: 136mm
With M6*1.0 Battery Post
Drop-down Stator Terminals

REFERENCES..

WAI / TRANSPO	FR601
AS	ARC9014
AS-PL	UD12847ARC
POWERMAX	81110964



HFR602

FEATURES:
Diodes: 8-50A diodes
Diameter OD: 149mm
With M6*1.0 Battery Post
Drop-down Stator Terminals For Improved Stator-Wire Attachment

REFERENCES..

YUNYI	12220700 / FD6002DW(Y)
WAI / TRANSPO	FR602
AS	ARC9015
MOBILETRON	RF-12



HFR603

FEATURES:
Diodes: 8-50A diodes
Diameter OD: 136 mm
W/Drop Down Leads
Ford 6G Series 105 Amp IR/IF Alternators

REFERENCES..

WAI / TRANSPO	FR603
AS	ARC9013
MOBILETRON	RF-103
LESTER	8305



HFR606

FEATURES:
Diodes: 6-50A diodes
Diameter OD: 136mm

REFERENCES..

MOBILETRON	RF-133



HFR1040

FEATURES:
Diodes: 6-35A diodes
Diameter OD: 119mm
With Aluminum Heat Sinks

REFERENCES..

YUNYI	12240200 / FD1002
WAI / TRANSPO	FR1040
AS	ARC9002
MOBILETRON	RF-07



HFR1070

FEATURES:
Diodes:6-35A diodes
For 40-65A Alternators
Aluminum Heat Sinks with Cooling Slots Fine Thread Studs
Unique Copper Insert Design

REFERENCES..

YUNYI	12240100 / FD1001
12240100 / FD1001	FR1070
AS	ARC9002
MOBILETRON	RF-08H



HFR1270

FEATURES:
Diodes: 6-40A diodes
Aluminum heat sinks
OE-type hi-temp circuit board
Ford 1G Series 70A ER/EF Alternators

REFERENCES..

WAI/TRANSPO	FR1270
YUNYI	FD1005/12240500
AS	ARC9005
MOBILETRO	RF-09H



HFR1280

FEATURES:
Diodes:6-50 Ampere in Star Carriers
For 70-100A Alternators
With Aluminum Heat Sinks
OE Type High Temp Circuit BOARD

REFERENCES..

YUNYI	12240600 / FD1007
WAI / TRANSPO	FR1280
AS	ARC9006
MOBILETRON	RF-16HD



HFR2013

FEATURES:
Diodes: 8-50A diodes
Diameter OD: 133mm
Drop-down Stator Terminals

REFERENCES..

WAI / TRANSPO	FR2013
YUNYI	FD3001DW/12200100
AS	ARC9010
MOBILETRON	RF-043



HFR2023

FEATURES:
Diodes: 8-50A diodes
Diameter OD: 147mm
With M6 * 1.0 Batt. Term.
Drop-down Stator Terminals

REFERENCES..

WAI/TRANSPO	FR2023
YUNYI	FD3002DW/12200200
AS	ARC9011
MOBILETRON	RF-053



HFR6003

FEATURES:
Diodes: 8-50A diodes
Diameter OD: 136 mm
With M6 * 1.0 mm Batt. Term

REFERENCES..

WAI / TRANSPO	WAI / TRANSPO
YUNYI	FD6000DW/12220200
AS	ARC9013
MOBILETRON	RF-103



HFR6013

FEATURES:
Diodes: 8-50A diodes
Diameter OD: 136mm
Drop-down Stator Terminals

REFERENCES..

YUNYI	12220400 / FD6001DW(Y)
WAI / TRANSPO	FR6013
AS	ARC9014
CARGO	233208



HFR6023

FEATURES:
Diodes: 8-50A diodes
Diameter OD: 149 mm
With M6 * 1.0 Batt. Term.

REFERENCES..

WAI / TRANSPO	FR6023
YUNYI	FD6002DW/12220700
AS	ARC9015
MOBILETRON	RF-123



HFR6073

FEATURES:
Diodes: 6-50 Ampere press-fit diodes
Diameter OD: 136mm
Drop-down Stator Terminals For Improved Stator-Wire Attachment

REFERENCES..

YUNYI	12221000 / FD6011DW(△
WAI / TRANSPO	FR6073
AS	ARC9033
MOBILETRON	RF-133



HFR6100

FEATURES:
Diodes: 8-50A Avalanche
Diameter OD: 105mm
With M3 * 0.5 Auxiliary Term.
With M6 * 1.0 * 33mm Batt.Term.

REFERENCES..

YUNYI	12230200 / FD61002A
WAI / TRANSPO	FR6100
AS	ARC9030
MOBILETRON	RF-19H



HFR6102

FEATURES:
Diodes：8-50A Avalanche
Diameter OD：114mm
With M6×16.4mm Battery Post

REFERENCES..

WAI / TRANSPO	FR6102
MOBILETRON	RF-18HV



HFR6103

FEATURES:
SPECS:12 Volt
SPECS FOR:Ford / Visteon
RC28 European 110-130A IR/IF Alternators

REFERENCES..

WAI / TRANSPO	FR6103



HFR6104

FEATURES:
Diodes：8-50A Avalanche
Diameter OD：105mm
With M6×39mm Battery Post

REFERENCES..

WAI / TRANSPO	FR6104
MOBILETRON	RF-22HV



HDR2400

FEATURES:
Diodes：6-50A Avalanche
With 5/16”X45mm Battery Post
With insulator

REFERENCES..

WAI / TRANSPO	DR2400
YUNYI	12110500/DC6104
MOBILETRON	RD-38A



HHR603

FEATURES: Diodes：6-35A diodes
Diameter OD:118mm
With M5 * 0.8 * 25 Batt. Term.
With diode trio.

REFERENCES..

YUNYI	12516500 / HI11801F
WAI / TRANSPO	IHR603
AS	ARC2001
MOBILETRON	RH-01



HHR604

FEATURES: Diodes:6-35A diodes
Diameter OD:111mm
With Trio

REFERENCES..

YUNYI	12511900 / HI11101F
WAI / TRANSPO	IHR604
AS	ARC2002
MOBILETRON	RH-02



HHR605

FEATURES: Diodes:6-35A diodes
Diameter OD:118mm
With M5*25 Batt. Term.
With 66mm * 2.5 Offset Strap
With diode trio.

REFERENCES..

YUNYI	12516900 / HI11804F
WAI / TRANSPO	IHR605
AS	ARC2001
MOBILETRON	RH-11



HHR607

FEATURES: Diodes:6-35A diodes
Diameter OD:118mm
With M5*25 Battery Post
With Trio

REFERENCES..

YUNYI	12516600 / HI11802F
WAI / TRANSPO	IHR607
AS	ARC2004
MOBILETRON	RH-14



HHR709

FEATURES: Diodes: 6-35A diodes
Diameter OD: 111mm
With M5 * 0.8 Batt. Term

REFERENCES..

WAI/TRANSPO	IHR709
AS	ARC2005
MOBILETRON	RH-03
HITACHI	L140-93202



HHR710

FEATURES: Diodes:6–35A diodes
Diameter OD:111mm
M5 * 0.8 * 35mm Batt.Term.
With diode trio.

REFERENCES..

YUNYI	12512400 / HI11102F
WAI / TRANSPO	IHR710
AS	ARC2005
MOBILETRON	RH-03



HHR711

FEATURES: Diodes:6-40A diodes
Diameter OD:111mm
With M5*35 Batery Post

REFERENCES..

YUNYI	12512600 / HI11103F
WAI / TRANSPO	IHR711
AS	ARC2006
MOBILETRON	RH-06



HHR712

FEATURES: Diodes:6-40A diodes
Diameter OD:111mm
With M5*25 Battery Post

REFERENCES..

YUNYI	12514000 / HI11108g
WAI / TRANSPO	IHR712
MOBILETRON	RH-07
WOODAUTO	RTF49814



HHR713

FEATURES: Diodes:6-35A diodes
Diameter OD:111mm
With M6*30 Battery Post
With diode trio

REFERENCES..

WAI / TRANSPO	IHR713
AS	ARC2008
CQ	CQ1080018
MOBILETRON	RH-08C



HHR720

FEATURES: 100mm OD
w/Diode Trio
8-35 Amp Diodes
Copper Heat Sinks

REFERENCES..

WAI/TRANSPO	IHR720
MOBILETRON	RH-40C



HHR721

FEATURES: Diodes: 6-35A diodes
Diameter OD: 118mm
With M5*31 Mounting Bolt
With Trio

REFERENCES..

YUNYI	12516800 / HI11803F
WAI / TRANSPO	IHR721
AS	ARC2009
MOBILETRON	RH-15



HHR722

FEATURES: Diodes:6-40A diodes
Diameter OD: 111mm
M5 * 0.8 * 35 Batt. Term
With diode trio. With 8.2mm
offset regulator strap.

REFERENCES..

WAI / TRANSPO	IHR722
AS	ARC2005
WOODAUTO	RTF49811
MOBILETRON	RH-03



HHR723

FEATURES: Diodes:6-35A diodes
Diameter OD: 111mm
M5*25mm Battery Post
With diode trio.

REFERENCES..

YUNYI	12513400/HI11106F
WAI / TRANSPO	IHR723
AS	ARC2011
MOBILETRON	RH-04



HHR727

FEATURES: Diodes:6-35A diodes
Diameter OD:100mm

REFERENCES..

YUNYI	12510700 / HI10003F
WAI / TRANSPO	IHR727
AS	ARC2012
MOBILETRON	RH16C



HHR728

FEATURES: Diodes:6-35A diodes
Diameter OD: 100mm
With M5*31 Mounting Bolt
With Trio

REFERENCES..

YUNYI	12511010 / HI10004Fg
WAI / TRANSPO	IHR728
AS	ARC2013
MOBILETRON	RH-17C



HHR732

FEATURES: Diode:6-35A diodes
Diameter OD: 100mm
With M5*30 Batt. Term.
With diode trio

REFERENCES..

WAI / TRANSPO	IHR732
AS	ARC2015
WOODAUTO	RTF49852
MOBILETRON	RH-20C



HHR733

FEATURES: Diodes: 6-35 Ampere
Diameter OD: 100mm
With M5×31mm Mounting Bolt
With Trio

REFERENCES..

WAI/TRANSPO	IHR733
MOBILETRON	RH-19C



HHR734

FEATURES: Diodes: 6-35 Ampere Dish
Diameter OD: 100mm
With M5×43mm Battery Post
With M5×31mm Mounting
Bolt
With Trio

REFERENCES..

WAI/TRANSPO	IHR734
MOBILETRON	RH-20C



HHR737

FEATURES: Diodes OD:8-35A diodes
Diameter OD: 114mm
With M6*8 Batt. Term.
For Radial B+ Term.
Extension

REFERENCES..

YUNYI	12507700 / HI11408
WAI / TRANSPO	IHR737
AS	ARC2042
MOBILETRON	RH-76



HHR738

FEATURES: Diodes: 8-35A diodes
Diameter OD: 114mm
With M6*8 Battery Post

REFERENCES..

YUNYI	12508100 / HI11410
WAI / TRANSPO	IHR738
MOBILETRON	RH-70
NISSAN	232303S501



HHR739

FEATURES: Diodes: 8-35A diodes
Diameter OD: 114mm
With M6*13 Batt. Term.

REFERENCES..

WAI/TRANSPO	IHR739
YUNYI	HI11410A/12508110
AS	ARC2044
MOBILETRON	RH-69



HHR741

FEATURES: Diodes:6-35A diodes
Diameter OD:114mm
With M6*8 Batt. Term
With Trio

REFERENCES..

YUNYI	12507100 / HI11407-1
WAI / TRANSPO	IHR741
MOBILETRON	RH-78
FIT UNIT	0K24118300



HHR744

FEATURES: Diodes: 8-35A diodes
Diameter OD: 114 mm
With M6*8 Batt. Term.

REFERENCES..

WAI / TRANSPO	IHR744
YUNYI	HI11407A/12507010
MOBILETRON	RH-33
HITACHI	L185G-1320



HHR745

FEATURES: SPECS:12 Volt
SPECS FOR:Hitachi 80A
IR/IF Alternators

REFERENCES..

WAI/TRANSPO	IHR745



HHR746

FEATURES: Diodes:8-35A diodes
Diameter OD :114mm
With M8*45 Battery
Terminal
Without diode trio.

REFERENCES..

YUNYI	12505600 / HI11403
WAI / TRANSPO	IHR746
AS	ARC2021
MOBILETRON	RH-31



HHR749

FEATURES: Diodes:6-35A diodes
Diameter OD :115mm
With M8*38 Batt. Term.

REFERENCES..

YUNYI	12505300 / HI11401
WAI / TRANSPO	IHR749
AS	ARC2016
MOBILETRON	RH-48



HHR750

FEATURES: Diodes: 8-35 Ampere
Diameter OD: 103mm
With M5×31.6mm Mounting
Bolt

REFERENCES..

WAI/TRANSPO	IHR750
MOBILETRON	RH-21
YUNYI	HI10311



HHR751

FEATURES: Diodes:6-35A diodes
Diameter OD :103mm
With M6*35 Battery Terminal
With diode trio.

REFERENCES..

YUNYI	1250AV00 / HI10305
WAI / TRANSPO	IHR751
AS	ARC2017
MOBILETRON	RH-22



HHR752

FEATURES: Diodes: 6-35A diodes
Diameter OD: 103 mm
With M5 Battery Post
With Trio

REFERENCES..

YUNYI	1250AR00/HI10301
WAI/TRANSPO	IHR752
AS	ARC2036
MOBILETRON	RH-23



HHR753

FEATURES: Diodes: 8-35 Ampere
Diameter OD: 103 mm
With M5×16.6mm Battery Post
Without Trio

REFERENCES..

WAI/TRANSPO	IHR753
MOBILETRON	RH-24
YUNYI	HI10303



HHR754

FEATURES: Diodes: 8–35A diodes
Diameter OD: 103 mm
With M6*27 Batt. Term.

REFERENCES..

YUNYI	1250AW00 / HI10306
WAI / TRANSPO	IHR754
AS	ARC2018
MOBILETRON	RH-25



HHR755

FEATURES: Diodes: 8-35A diodes
Diameter OD: 103mm
With M6*27 Battery Post
With Trio

REFERENCES..

YUNYI	1250AX00/HI10307
WAI/TRANSPO	IHR755
AS	ARC2019
MOBILETRON	RH-26



HHR756

FEATURES: SPECS:12 Volt
SPECS FOR:Hitachi 60-80A IR/IF Alternators

REFERENCES..

WAI/TRANSPO	IHR756
MOBILETRON	RH-23



HHR757

FEATURES: Diodes: 6-35A diodes
Diameter OD: 103mm
With M6*27 Batt. Term.
With Trio

REFERENCES..

WAI/TRANSPO	IHR757
AS	ARC2075
MOBILETRON	RH-28
HITACHI	LR150-711



HHR758

FEATURES: Diodes: 6-35A diodes
Diameter OD: 103mm
With M5 * 0.8 Batt. Term.
Without diode trio

REFERENCES..

WAI/TRANSPO	IHR758
YUNYI	HI10304/1250AU00
AS	ARC2037
MOBILETRON	RH-29



HHR762

FEATURES: Diodes : 6-35 Ampere
Diameter OD : 114mm
With M6×20.3mm Battery Post

REFERENCES..

WAI/TRANSPO	IHR762



HHR764

FEATURES: Diodes:8-35A diodes
Diameter OD: 114mm
With M6*35 Batt. Term

REFERENCES..

YUNYI	1250AE00 / HI11424
WAI / TRANSPO	IHR764
MOBILETRON	RH-82
HITACHI	LR190-744



HHR769

FEATURES: Diodes:8-50A diodes
Diameter OD: 127mm
With M8*38 Batt. Term.
Without diode trio.

REFERENCES..

YUNYI	12500110 / HI11301A
WAI / TRANSPO	IHR769
AS	ARC2020
MOBILETRON	RH-68



HHR770

FEATURES: Diodes: 8-50A diodes
Diameter OD: 119mm
With M6*8 Battery Post

REFERENCES..

WAI/TRANSPO	IHR770
YUNYI	HI11304A/12504800
AS	ARC2043
MOBILETRON	RH-77



HHR771

FEATURES: Diodes: 6-50A Avalanche
Diameter OD: 119mm
With M6*8 Stud for Side-Mount B+

REFERENCES..

WAI / TRANSPO	IHR771
AS	ARC2046
ERA	215464
MOBILETRON	RH-71



HHR772

FEATURES: SPECS:12 Volt
SPECS FOR:Hitachi 95A
IR/IF Alternators

REFERENCES..

WAI/TRANSPO	IHR772
MOBILETRON	RH-38



HHR773

FEATURES: Diodes:8-50A Avalanche
Diameter OD: 119mm
With M6*8 Stud for Side-Mount B+

REFERENCES..

YUNYI	12501700 / HI11303A
WAI / TRANSPO	IHR773
AS	ARC2022
MOBILETRON	RH-35



HHR774

FEATURES: SPECS:12 Volt
SPECS FOR:Hitachi 110A
IR/IF Alternators

REFERENCES..

WAI/TRANSPO	IHR774
MOBILETRON	RH-36



HHR775

FEATURES: Diodes: 8-35A diodes
Diameter OD: 114mm
With M6*8 Batt. Term.

REFERENCES..

WAI/TRANSPO	IHR775
YUNYI	HI11407/12507000
MOBILETRON	RH-33
HITACHI	L190-



HHR776

FEATURES: Diodes : 6-35 Ampere
Diameter OD : 114mm
With M6×20.3mm Battery Post

REFERENCES..

WAI/TRANSPO	IHR776
HITACHI	LR170-758
YUNYI	1250AB00/HI11423



HHR778

FEATURES: Diodes:6-35A diodes
Diameter OD: 114mm
With M6*8 Batt. Term.

REFERENCES..

YUNYI	12506100 / HI11405
WAI / TRANSPO	IHR778
AS	ARC2054
MOBILETRON	RH-32



HHR779

FEATURES: Diodes: 8-35A diodes
Diameter OD: 114mm
With M6*35 Batt.Term

REFERENCES..

WAI/TRANSPO	IHR779
MOBILETRON	RH-66
HITACHI	GD109578-E
ISUZU	8971307760



HHR780

FEATURES: Diodes:8-35A diodes
Diameter OD: 114mm
With M6*35 Battery

REFERENCES..

YUNYI	HI11407A-161
WAI / TRANSPO	IHR780
MOBILETRON	RH-66A




HHR781

FEATURES: Diodes: 6-35A diodes
Diameter OD: 114 mm
With M6*1.0 Batt. Term.

REFERENCES..

WAI / TRANSPO	IHR781
YUNYI	HI11418A
AS	ARC2055
MOBILETRON	RH-67A



HHR782

FEATURES: Diodes:6-40A diodes
Diameter OD: 114mm
With M6*35 Battery
Terminal

REFERENCES..

YUNYI	1250A500
WAI / TRANSPO	IHR782
AS	ARC2056
MOBILETRON	RH-79



HHR783

FEATURES: Diodes:8-35A diodes
Diameter OD: 115mm
With M6*8 Batt. Term.

REFERENCES..

WAI / TRANSPO	IHR783
AS	ARC2054
CQ	CQ1080608
MOBILETRON	RH-32



HHR791

FEATURES: 119mm OD
M6 Battery Post
8-50A Avalanche Diodes

REFERENCES..

WAI / TRANSPO	IHR791
MOBILETRON	RH-111
AS	ARE0508



HR1258

FEATURES: Diodes: 8-35A diodes
Diameter OD: 114mm
With Trio

REFERENCES..



HR1519

FEATURES: Diodes:8-35A diodes
Diameter OD:138mm
With M6*1.0 Battery Post
With Aluminum Heat Sinks

REFERENCES..

WAI / TRANSPO	INR9535
AS	ARC6047
DENSO	021580-5350



HR1257

FEATURES: Diodes:6-35A Avalanche
Diameter OD:125.5mm
With Trio

REFERENCES..

AS	ARC2061
CQ	CQ1080184
NIKKO	337302190
CARGO	135681



HR1334PLA

FEATURES: Diodes: 8-50A diodes
Diameter OD: 120mm
With M8 Battery Post

REFERENCES..



HHR1000

FEATURES: Diodes: 6–25A diodes
With M5*13 Mtg. Post

REFERENCES..

WAI / TRANSPO	IHR1000
AS	ARC2079
ERA	215412
MOBILETRON	RH-49




HHR1001

FEATURES: Diodes: 6-25A diodes
With M5*13 Mtg. Post
With diode trio.

REFERENCES..

WAI/TRANSPO	IHR1001
YUNYI	HIF5003/12530400
LUCAS	36511428
MOBILETRON	RH-51




HIYR8510

FEATURES: Diodes: 6-30A diodes
Mounting Length: 85mm
With M5*19 Battery Post
With Trio

REFERENCES..

WAI/TRANSPO	IYR8510
LESTER	13731




HIYR9003

FEATURES: Diodes: 8-30A Avalanche
Mounting Length:90mm
With M8*1.25 Battery Post
Crimp-Weld Diode Terminations
HEAVY DUTY TRIO& CAPACITOR

REFERENCES..

MOBILETRON	1260E500 / MIA9002
YUNYI	IYR9003
WAI / TRANSPO	ARC5079
AS	RM-151
MOBILETRON	



HIYR9016

FEATURES: Diodes: 8-50A Avalanche
Mounting Length:90mm
With M8*1.25 Battery Post
Crimp-Weld Diode Terminations

REFERENCES..

WAI / TRANSPO	IYR9016
AS	ARC9046
MOBILETRON	RM141



HIYR9028

FEATURES: Diodes:6-50A Avalanche
Mounting Length:90mm
With M8 Battery Post
With HD Diode Trio

REFERENCES..

YUNYI	1260E400 / MIA9001
WAI / TRANSPO	IYR9028
AS	ARC5186
MOBILETRON	RM-132



HIYR9058

FEATURES: Diodes:8-50A diodes
Mounting Length:90mm
With M6*22 Battery Post
With Capacitor & Diode Trio

REFERENCES..

WAI / TRANSPO	IYR9058
AS	ARC9018
CQ	CQ1080445
WOODAUTO	RTF49900



HIYR9094

FEATURES: Diodes:6-50A diodes
Mounting Length:90mm
With M6*1.0 Battery Terminal
Crimp-weld diode terminations

REFERENCES..

YUNYI	1260K300
WAI / TRANSPO	IYR9094
AS	ARC5169
MOBILETRON	RM-118



HIYR10038

FEATURES: Diodes:8-30A diodes
Mounting Length:100mm
With M6 Battery Post
With Trio

REFERENCES..

WAI / TRANSPO	IYR10038
WIEGEL	GLRMA450001



HR1346

FEATURES: Diodes:6-35A diodes
Diameter OD:118mm
With M6*35.2 Battery Post
With M5*46.5 Mounting Bolt
With M5*41 Tighting Bolt
With Trio

REFERENCES..

AS	ARC2039
AS-PL	UD03412ARC
CARGO	236466
KRAUF	AEY6466



HR1346C

FEATURES: Diodes: 6-35A diodes
Diameter OD: 121mm
With M6*30 Battery Post

REFERENCES..



HR1386

FEATURES: Diodes: 6-35A diodes
Diameter OD: 111mm

REFERENCES..



HR1457

FEATURES: Diodes:8-35A diodes

REFERENCES



HR1489

FEATURES: Diodes: 12-50A diodes
With M8*1.25 Battery Post

REFERENCES..
OEM 96765212




HLR166

FEATURES: Diodes：9-35A diodes
With M5*50 Mounting Post

REFERENCES

YUNYI	12010100 / LUS1101
WAI / TRANSPO	ILR166
AS	ARC4010
MOBILETRON	RL-08




HR1432

FEATURES: Diodes:6-25A diodes Button
With M5 * 50mm Mounting Post
With Trio

REFERENCES

GPD	HR1432
MOBILETRON	RL-08HV
CARGO	130643



HLR566

FEATURES: Diodes: 6-35A diodes
Diameter OD: 115mm
With M6*1.0 Battery Post
With M5*0.8 Mounting Post
With Lead Wire 110mm;With Trio

REFERENCES

YUNYI	12000200 / LUS133
WAI / TRANSPO	ILR566
AS	ARC4002
MOBILETRON	RL-01



HLR567

FEATURES: Diodes: 6-35A diodes
Diameter OD: 115mm
With M6*1.0 Battery Post
With M5*0.8 Mounting Post
With Lead Wire 110mm； With Trio

REFERENCES

YUNYI	12000500 / LUS136
WAI / TRANSPO	ILR567
AS	ARC4003
MOBILETRON	RL-11H



HLR568

FEATURES: Diodes:6-35A diodes
Diameter OD:115mm
With M6*42 Battery Post
With M5*56 Mounting Post
With M4*19 Trio Post

REFERENCES

YUNYI	12000600 / LUS137
WAI / TRANSPO	ILR568
AS	ARC4004
MOBILETRON	RL-09



HLR569

FEATURES: Diodes:6-35A diodes
Diameter OD:115mm
With M6*28 Battery Post
With M5*32 Mounting Post

REFERENCES

YUNYI	12001400 / LUS149
WAI / TRANSPO	ILR569
AS	ARC4011
CQ	CQ1080251



HLR570

FEATURES: Diodes: 6-35A diodes
Diameter OD: 115 mm
With M6*46.5 Battery Post
With M5*47.5 W-Post

REFERENCES

YUNYI	12000900 / LUS140
WAI / TRANSPO	ILR570
AS	ARC4005
MOBILETRON	RL-06



HLR571

FEATURES: Diodes: 6-35A diodes
Diameter OD: 115mm
With M6*32.5 Battery Post
With M5*53.7 W-Post
With Lead Wire 110mm;With Trio

REFERENCES

YUNYI	12001000 / LUS143
WAI / TRANSPO	ILR571
AS	ARC4002
MOBILETRON	RL-01H



HLR572

FEATURES: Diodes:6-35A diodes
Diameter OD: 115 mm
With M6*43.7 Battery Post
With M5*47.5 W-Post
With M4*28 Trio Post; With trio.

REFERENCES

WAI / TRANSPO	ILR572
TRANSPO	31-9222
MOBILETRON	RL-21H
LUCAS	UBB 145



HLR573

FEATURES:
Diodes: 6–35A diodes
Diameter OD: 115 mm
With M5*56 Mtg. Post
With M6*28 Batt. Term.

REFERENCES

WAI / TRANSPO	ILR573
LUCAS	84855
LESTER	12072
LUCAS	84885



HLR574

FEATURES:
Diodes: 6-35A diodes
Diameter OD: 115 mm
With M5*44 Auxiliary Term.
With M6*46 Batt.Term.

REFERENCES

YUNYI	12001200 / LUS147
WAI / TRANSPO	ILR574
CARGO	133430
MOBILETRON	RL-07H



HLR575

FEATURES:
Diodes:6-35 Ampere
Diameter OD: 115mm
With M6×46.5mm Battery Post
With M5×47.5mm W-Post
With Lead Wire 110mm
With Trio

REFERENCES

WAI / TRANSPO	ILR575HD
MOBILETRON	RL-06H
YUNYI	12000900/LUS140



HLR576

FEATURES:
Diodes:6-35A diodes
Diameter OD:115 mm
With M6*52 Battery Post
With M5*53.7 W-Post
With M5*31.5 Trio Post

REFERENCES

YUNYI	12001300 / LUS148
WAI / TRANSPO	ILR576
AS	ARC4006
MOBILETRON	RL-10H



HLR71180

FEATURES:
Diodes:35 Ampere Press Fit
Positive Assembly
Die-Cast Aluminium Heat Sink(1"T)
High-Temp Leads,Terminals Included

REFERENCES

YUNYI	129Z0300
WAI / TRANSPO	LR71180
LESTER	7602
CARGO	137228



HLR71181

FEATURES:
Diodes:35 Ampere Press Fit
Negative Assembly
Die-Cast Aluminium Heat Sink(1"T)
High-Temp Leads,Terminals Included

REFERENCES

YUNYI	129Z0400
WAI / TRANSPO	LR71181
CARGO	137229
LEECE NEVILLE	71181



HLR97084

FEATURES:
Diodes:Positive Assembly,
3-50 Ampere Press Fit 330 Volt
With Lead Wire 1-125mm
With Lead Wire 2-85mm
For use on:140-160A 2800JB Series,
7800JB Series

REFERENCES

YUNYI	12912100/ZLB-07
WAI / TRANSPO	LR97084
MOBILETRON	RC-07HV
TRANSPO	LR97084



HLR97085

FEATURES:
Diodes:Negative Assembly,
3-50 Ampere Press Fit 330 Volt
With Lead Wire 1-125mm
With Lead Wire 2-85mm
For use on:140-160A 2800JB Series,
7800JB Series

REFERENCES

YUNYI	12912400/ZLB-08
WAI / TRANSPO	LR97085
MOBILETRON	RC-08HV
TRANSPO	LR97085



HR1392

FEATURES:
Diodes: 6-35A diodes
With M6 Battery Post
With Tiro

REFERENCES..



HXR542

FEATURES: Diodes:6–35A diodes
Diameter OD: 104mm
With M6*1.0 Batt. Term.
With diode trio.

REFERENCES

YUNYI	12730100 / MG6303
WAI / TRANSPO	IXR542
AS	ARC4012
MOBILETRON	RI-16H



HXR631

FEATURES: Diodes: 6-50A Avalanche
Diameter OD: 111mm
With M6*1.0 Battery Post

REFERENCES

YUNYI	12721500 / MG6316
WAI / TRANSPO	IXR631
AS	ARC4020
MOBILETRON	RI-32H



HXR633

FEATURES: Diodes: 6-35A Avalanche
Diameter OD: 111mm
With M8*50 Battery Post

REFERENCES

YUNYI	12720700 / MG6307
WAI / TRANSPO	IXR633
CARGO	230119
MOBILETRON	RI-14H



HXR634

FEATURES: Diodes: 8-50A Avalanche
Diameter OD: 111mm
With M8*1.25 Battery Post

REFERENCES


YUNYI	12720200 / MG6302
WAI / TRANSPO	IXR634
AS	ARC4007
WOODAUTO	RTF49551



HXR636

FEATURES: Diodes:6-50A diodes
Dim: 17.5mm Thk. Heat Sink
WIth M6*1.0 Batt. Term.
With diode trio.

REFERENCES



HXR642

FEATURES: Diodes: 6-50A Avalanche
Diameter OD: 121mm
With M8*50 Battery Post
Without trio

REFERENCES

YUNYI	12720100 / MG6301
WAI / TRANSPO	IXR642
AS	ARC4016
MOBILETRON	RI-23H




HXR691

FEATURES: Diodes: 6-35A Button
Thick:17.5mm
With Trio

REFERENCES

YUNYI	12700400 / MG6905
WAI / TRANSPO	IXR691
AS	ARC4023
MOBILETRON	RI-01




HXR692

FEATURES: Diodes: 6-35A Button
Thick: 17.5mm
With M6*45 Battery Post
With Trio

REFERENCES

YUNYI	12700200 / MG6902
WAI / TRANSPO	IXR692
AS	ARC4008
MOBILETRON	RI-02




HXR693

FEATURES: Diodes: 6-35A Button
Thick: 19.5mm
With M6*1.0 Batter Post
With Trio

REFERENCES

YUNYI	12700100 / MG6901
WAI / TRANSPO	IXR693
AS	ARC4009
MOBILETRON	RI-02



HXR704

FEATURES: Diodes：6-25 Ampere Button
With (M8+M5)×50.5mm Battery Post
With Trio Thick：17.5mm

REFERENCES

WAI / TRANSPO	IXR704
CARGO	139218
YUNYI	12700300/MG6903



HXR719

FEATURES: Diodes: 6-50A Avalanche
Diameter OD: 121mm
With M6*1.0 Battery Post

REFERENCES

YUNYI	12720300 / MG6304
WAI / TRANSPO	IXR719
AS	ARC4013
MOBILETRON	RI-24H



HXR725

FEATURES: SPECS:12 Volt
SPECS FOR:Marelli 100A IR/IF Alternators

REFERENCES

MOBILETRON	RI-17H
WAI / TRANSPO	IXR725



HR1251

FEATURES: Diodes:6-50A diodes
Diameter OD: 110mm
With M8*1.25 Battery Post

REFERENCES..

WAI / TRANSPO	IXR640
AS	ARC4018
CARGO	215961
MOBILETRON	RI-35



HR1374

FEATURES: Diodes: 6-50A diodes
Diameter OD: 110mm

REFERENCES..




HMR7111

FEATURES: Diodes:6-35A diodes
Mounting Length: 71mm
With trio
With Copper Heat Sinks

REFERENCES..

YUNYI	12610700 / MIP7103F
WAI / TRANSPO	IMR7111
AS	ARC5205S
MOBILETRON	RM-60




HMR7115

FEATURES: Diodes: 6-30A diodes
Mounting Length: 71mm
With M5*25 Battery Post
With Capacitor;Without Trio

REFERENCES..

OEM	A860T06570
OEM	S501-24-510
OEM	172-48016
OEM	172-48016



HMR7117

FEATURES: Diodes:6-35A diodes
Mounting Length: 71mm
With M5*25 Battery Post
With trio ;
With Copper Heat Sinks

REFERENCES..

YUNYI	12610800 / MIP7104F
WAI / TRANSPO	IMR7117
NEW-ERA	D-016
MOBILETRON	RM-88




HMR7121

FEATURES: Diodes:6-35A diodes
Mounting Length: 71mm
With M5*40 Battery post

REFERENCES..

KRAUF	AEM7121
MITSUBISHI	A860T12870
OEM	MFRX03251
MOBILETRON	RM-84




HMR7139

FEATURES: DIODES:6-25 AMPERE

REFERENCES..

MOBILETRON	RM-78
MITSUBISHI	A860T08570
MAZDA	S20524510



HMR7141

FEATURES: Diodes:6-35A diodes
Mounting Length: 71mm
With trio
With Copper Heat Sinks

REFERENCES..

WAI / TRANSPO	IMR7141
MAZDA	D401-24-510B
KRAUF	AEM0032
MOBILETRON	RM-62




HMR8011

FEATURES: Diodes:6-35A diodes
Mounting Length: 80mm
With trio
With Copper Heat Sinks

REFERENCES..

YUNYI	12612500 / MIP8005
WAI / TRANSPO	IMR8011
AS	ARC5015
MOBILETRON	RM-85




HMR8041

FEATURES: Diodes: 6-35A diodes
Mounting Length: 80mm
With M5*49 Battery Post
With Trio；With
Aluminum/Copper Heat sinks

REFERENCES..

YUNYI	12613000 / MIP8008
WAI / TRANSPO	IMR8041
AS	ARC5016
MOBILETRON	RM-65



HMR8043

FEATURES: Diodes: 6-35A diodes
Mounting Length: 80mm
With Trio
With Copper Heat sinks

REFERENCES..

YUNYI	12612100/MIP8003
WAI/TRANSPO	IMR8043
AS	ARC5017
MOBILETRON	RM-66



HMR8045

FEATURES: Diodes: 6-35A diodes
Mounting Length: 80mm
With M5*49 Battery Post
With Trio

REFERENCES..

YUNYI	12612300/MIP8004
WAI/TRANSPO	IMR8045
AS	ARC5018
MOBILETRON	RM-67




HMR8047

FEATURES: Diodes: 6-35A diodes
Mounting Length: 80mm
With M5*43 Battery Post
With Trio；With
Copper/Aluminum heat sinks

REFERENCES..

YUNYI	12612800 / MIP8007
WAI / TRANSPO	IMR8047
AS	ARC5019
MOBILETRON	RM-86




HMR8511

FEATURES: Diodes:6-35A diodes
Mounting Length: 85mm
With Trio
With Copper Heat sinks

REFERENCES..

YUNYI	12613600 / MIP8501
WAI / TRANSPO	IMR8511
AS	ARC5020
MOBILETRON	RM-68




HMR8541

FEATURES: Diodes: 6-35A diodes
Mounting Length: 85mm
With Trio
With Copper Heat sinks

REFERENCES..

YUNYI	12613800/MIP8502
WAI/TRANSPO	IMR8541
AS	ARC5022
MOBILETRON	RM-83




HMR8545

FEATURES: Diodes: 6-35A diodes
Mounting Length: 85mm
With M5*40 Battery Post
With Trio
With Copper Heat sinks

REFERENCES..

YUNYI	12613900/MIP8503
AS	ARC5025
WOODAUTO	RTF49824
MOBILETRON	RM-73




HMR8571

FEATURES: Diodes: 6-35A diodes
Mounting Length: 85mm
With Trio

REFERENCES..

WAI / TRANSPO	IMR8571
YUNYI	MIP8504/12614000
MOBILETRON	RM-69
MAZDA	8173-24-510A




HMR10011

FEATURES: Diodes:6-50A diodes
Mounting Length:100mm
With Trio
Without Capacitor

REFERENCES..

YUNYI	12610200 / MIP10002
WAI / TRANSPO	IMR10011
MOBILETRON	RM-75
MITSUBISHI	A860T07370



HMR10041

FEATURES: Diodes:6-50A diodes
Mounting Length:100mm
With Trio
With Copper Heat Sinks

REFERENCES..

YUNYI	12610100 / MIP10001
WAI / TRANSPO	IMR10041
CARGO	131547
MOBILETRON	RM-74




HMR10043

FEATURES: SPECS:12 Volt
SPECS FOR:Mitsubishi ER/EF
Alternators

REFERENCES..

WAI / TRANSPO	IMR10043
MITSUBISHI	RM-76
MITSUBISHI	A860T11770




HMR6540

FEATURES: Diodes:6-35A diodes
Mounting Length: 65mm
With M6*50 Battery Post
With Trio

REFERENCES..

YUNYI	12609600 / MIA6504
WAI / TRANSPO	IMR6540
AS	ARC5001
MOBILETRON	RM-03




HMR6542

FEATURES: Diodes: 6-35A diodes
Mounting Length: 65mm
With M5*48 Battery Post
With Trio

REFERENCES..

YUNYI	12609300 / MIA6501
WAI / TRANSPO	IMR6542
AS	ARC5002
MOBILETRON	RM-01




HMR6548

FEATURES: Diodes:6-35A diodes
Mounting Length: 65mm
With trio

REFERENCES..

YUNYI	12609500 / MIA6503
WAI / TRANSPO	IMR6548
AS	ARC5003
MOBILETRON	RM-04




HMR7542

FEATURES: Diodes:6-35A diodes
Mounting Length: 75mm
With diode trio
Com diodo trio

REFERENCES..

YUNYI	1260AK00 / MIA7517
WAI / TRANSPO	IMR7542
AS	ARC5053
MOBILETRON	RM-11




HMR7544

FEATURES: Diodes: 6-35A diodes
Mounting Length: 75 mm
With M5*48 Battery Post
With Trio

REFERENCES..

YUNYI	1260A300 / MIA7501
WAI / TRANSPO	IMR7544
AS	ARC5004
MOBILETRON	RM-08



HMR7546

FEATURES: Diodes: 6-35A diodes
Mounting Length: 75mm
With M5*18 Battery Post
With Trio

REFERENCES..

YUNYI	1260A400 / MIA7502
WAI/TRANSPO	IMR7546
CARGO	132040
MITSUBISHI	A860T17570



HMR7548

FEATURES: Diodes: 6-35A Avalanche
Mounting Length:75mm
With Trio

REFERENCES..

YUNYI	1260AQ00 / MIA7523
AS	ARC5006
CQ	CQ1080642
MOBILETRON	RM-09




HMR7550

FEATURES: Diodes: 6-35A diodes
Mounting Length: 75mm
With Trio

REFERENCES..

YUNYI	1260A500 / MIA7503
WAI / TRANSPO	IMR7550
AS	ARC5007
MOBILETRON	RM-11




HMR7512

FEATURES: Diodes:6-35A diodes
Mounting Length: 75mm
With M6*50 Batt. Term

REFERENCES..

WAI / TRANSPO	IMR7512
WOODAUTO	RTF49826
MITSUBISHI	A2T48176
MITSUBISHI	A2T48195




HMR7552

FEATURES: Diodes: 6-35A diodes
Mounting Length: 75mm
With M5*18 Batt. Term.
With diode trio

REFERENCES..

YUNYI	1260AR00 / MIA7524
WAI / TRANSPO	IMR7552
AS	ARC5054
MOBILETRON	RM-12



HMR7554

FEATURES: Diodes: 6-35A diodes
Mounting Length: 75mm
With M6*49.5 Batt. Term.
With diode trio

REFERENCES..

YUNYI	1260AS00 / MIA7525
WAI / TRANSPO	IMR7554
AS	ARC5056
MOBILETRON	RM-17




HMR7556

FEATURES: Diodes:6-35A diodes
Mounting Length: 75mm
With M6*50 Batt. Term
With diode trio

REFERENCES..

YUNYI	1260A600 / MIA7504
WAI / TRANSPO	IMR7556
AS	ARC5008
MOBILETRON	RM-10




HMR7558

FEATURES: Diodes: 8-35A diodes
Mounting Length: 75mm
With M6*50 Battery Post
With Trio

REFERENCES..

YUNYI	1260A700 / MIA7505
WAI / TRANSPO	IMR7558
AS	ARC5009
MOBILETRON	RM-22



HMR7560

FEATURES: Diodes:8-35 Ampere
Mounting Length:75mm
With M6×49.5mm Battery Post
With Trio
For use on:Nissan Pulsar

REFERENCES..

WAI / TRANSPO	IMR7560
MOBILETRON	RM-14
YUNYI	1260AT00/MIA7526
CARGO	134295



HMR7562

FEATURES: Diodes:8-35 Ampere
Mounting Length:75mm
With M5×44mm Battery Post
With Trio
For use on:Geo Tracker, Suzuki Sidekick

REFERENCES..

WAI / TRANSPO	IMR7562
MOBILETRON	RM-23
YUNYI	1260A900/MIA7506
CARGO	134027



HMR7564

FEATURES: Diodes:6-35 Ampere
Mounting Length:75mm
With M6×47.5mm Battery Post
With Trio
For use on:Mitsubishi Galant, Mirage, Pajero

REFERENCES..

WAI / TRANSPO	IMR7564
MOBILETRON	RM-20HV
YUNYI	1260AA00/MIA7507
CARGO	132468



HMR7568

FEATURES: Diodes:6-35 Ampere
Mounting Length:75mm
With M5×47.5mm Battery Post
With Trio
For use on:Mitsubishi Mirage Diesel

REFERENCES..

WAI / TRANSPO	IMR7568
MOBILETRON	RM-18
YUNYI	1260AB00/MIA7508



HMR7570

FEATURES: Diodes:6-35 Ampere
Mounting Length:75mm
With M5×49mm Battery Post
With Trio
For use on:Dodge Colt, Mitsubishi Mirage 1.5L

REFERENCES..

WAI / TRANSPO	IMR7570
MOBILETRON	RM-19
YUNYI	MIA7590



HMR7572

FEATURES: Diodes:6-35 Ampere
Mounting Length:75mm
With M5×44mm Battery Post
With Trio
For use on:Mazda 323

REFERENCES..

WAI / TRANSPO	IMR7572
MOBILETRON	RM-16
YUNYI	MIA7510
CARGO	135247



HMR7576

FEATURES: Diodes:8-35 Ampere
Mounting Length:75mm
With M5×44mm Battery Post
With Trio
For use on:Honda Civic

REFERENCES..

WAI / TRANSPO	IMR7576
MOBILETRON	RM-28
YUNYI	MIA7522
MITSUBISHI	A866X45281



HMR7580

FEATURES: Diodes:6-35 Ampere
Mounting Length:75mm
With M5×44mm Battery Post
With Trio

REFERENCES..

WAI / TRANSPO	IMR7580
MOBILETRON	RM-23
YUNYI	MIA7532
MITSUBISHI	A860T34170



HMR7581

FEATURES: Diodes:8-35 Ampere
Mounting Length:75mm1
With M5×44mm Battery Post
Without Trio

REFERENCES..

WAI / TRANSPO	IMR7581
MOBILETRON	RM-145
YUNYI	MIA7533
MITSUBISHI	A005TA4291



HMR7582

FEATURES: Diodes:6-35 Ampere
Mounting Length:75mm
With M6×49.5mm Battery Post
With Trio
For use on:Mitsubishi 50-70 Amp IR/IF Alternators

REFERENCES..

WAI / TRANSPO	IMR7582
MOBILETRON	RM-22
YUNYI	MIA7527
MITSUBISHI	A860T39770



HMR7584

FEATURES: Diodes:8-35 Ampere
Mounting Length:75mm
With Trio
For use on:Honda Civic, Del Sol

REFERENCES..

WAI / TRANSPO	IMR7584
MOBILETRON	RM-27
YUNYI	A5T04292
MITSUBISHI	MIA7512



HMR7586

FEATURES: Diodes:6-35 Ampere
Mounting Length:75mm
With M6×49.5mm Battery Post
With Trio
For use:Mazda 929

REFERENCES..

WAI / TRANSPO	IMR7586
MOBILETRON	RM-240
YUNYI	MIA7513
MITSUBISHI	A860T20070



HMR7588

FEATURES: Diodes:6-35 Ampere
Mounting Length:75mm
With M8×59.5mm Battery Post
With Trio
For use on:1993-94 Mazda Mitsubishi

REFERENCES..

WAI/TRANSPO	IMR7588
MOBILETRON	RM-124
YUNYI	1260AI00 / MIA7516
CARGO	235890




HMR7589

FEATURES: Diodes: 6-35A diodes
Mounting Length: 75mm
With M6*50 Battery Post
With Trio

REFERENCES..

WAI/TRANSPO	IMR7589
LESTER	11177
LESTER	23544



HMR7590

FEATURES: Diodes:6-35A diodes
Mounting Length : 75mm
With M5*18 Battery Post
With Trio；With Capacitor

REFERENCES..

YUNYI	1260B800/MIA7542
WAI/TRANSPO	IMR7590
AS	ARC5112
MOBILETRON	RM-129



HMR7596

FEATURES: Diodes: 6-35A diodes
Mounting Length: 75mm
With M6*50 Battery Post
With Trio

REFERENCES..

YUNYI	1260AG00/MIA7514
WAI/TRANSPO	IMR7596
AS	ARC5014
LESTER	20772




HMR8521

FEATURES: Diodes:6-35A diodes
Mounting Length: 85mm
With M5*42 Batt. Term
With Trio

REFERENCES..


AS	ARC5083
CARGO	234647
MAZDA	TF20-18-W60
MITSUBISHI	A860T41070



HMR8530

FEATURES: Diodes: 8-35A diodes
Mounting Length: 85mm
With M8*52 Batt. Term
Without Trio

REFERENCES..




HMR8540

FEATURES: Diodes: 6-35A diodes
Mounting Length: 85mm
With Trio

REFERENCES..

YUNYI	1260BX00/MIA8501
WAI/TRANSPO	IMR8540
AS	ARC5021
WOODAUTO	RTF49861



HMR8542

FEATURES: Diodes:6-35A diodes
Mounting Length: 85mm
With M6*50 Battery Post
With trio

REFERENCES..

YUNYI	1260BY00 / MIA8502
WAI / TRANSPO	IMR8542
AS	ARC5023
MOBILETRON	RM-30




HMR8544

FEATURES: Diodes:6-35A diodes
Mounting Length: 85mm
With M6*50 Battery Post
With trio

REFERENCES..

YUNYI	1260BZ00 / MIA8503
WAI / TRANSPO	IMR8544
AS	ARC5024
MOBILETRON	RM-31

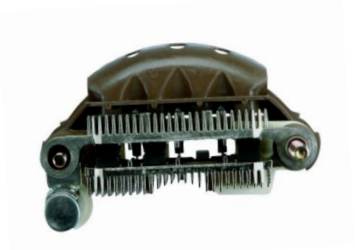


HMR8546

FEATURES: Diodes:6-35A diodes
Mounting Length: 85mm
With M6*50 Battery Post
With trio

REFERENCES..

YUNYI	1260BZ00 / MIA8503
WAI / TRANSPO	IMR8546
AS	ARC5026
MOBILETRON	RM-31




HMR8548

FEATURES: Diodes:6-35A diodes
Mounting Length: 85mm
With M5*42 Battery
Post,knurled
With Trio

REFERENCES..

YUNYI	1260C100 / MIA8505
WAI / TRANSPO	IMR8548
AS	ARC5027
MOBILETRON	RM-38




HMR8566

FEATURES:
Diodes: 6-35A diodes
Mounting Length: 85mm
With M8*52 Batt. Term.
Without diode trio.
Without capacitor.

REFERENCES..

YUNYI	1260CB00 / MIA8514
AS	ARC5109
MOBILETRON	RM-110HV
WAI / TRANSPO	IMR8566



HMR8567

FEATURES:
Diodes: 6-35A diodes
Mounting Length: 85mm
With M5*42 Battery Post
Without Trio/Capacitor

REFERENCES..

YUNYI	1260CS00/MIA8531
WAI/TRANSPO	IMR8567
AS	ARC5073
MOBILETRON	RM-130




HMR8568

FEATURES:
Diodes:6-35A diodes
Mounting Length:85mm
With M6*50 Battery Post
Without Capacitor

REFERENCES..

YUNYI	1260D600 / MIA8545
WAI / TRANSPO	IMR8568
AS	ARC5115




HMR8570

FEATURES:
Diodes:6-35 Ampere
Mounting Length:85mm
With Trio/Capacitor

REFERENCES..

WAI/TRANSPO	IMR8570
LESTER	13230
FIT UNIT	A003T00491




HMR8572

FEATURES:
Diodes: 8-35A diodes
Mounting Length: 85mm
With M5*18 Battery Post
With Trio

REFERENCES..

YUNYI	1260C700/MIA8510
WAI/TRANSPO	IMR8572
AS	ARC5030
MOBILETRON	RM-38



HMR8574

FEATURES:
Diodes:8-35A diodes
Mounting Length: 85mm
With M6*50 Batt. Term.
With Trio

REFERENCES..

YUNYI	1260C800 / MIA8511
WAI / TRANSPO	IMR8574
AS	ARC5031
MOBILETRON	RM-34



HMR8575

FEATURES:
Diodes:8-35 Ampere
Mounting Length:85mm
With M6×43.5mm Battery Post
Without Trio
Without Capacitor

REFERENCES..

WAI/TRANSPO	IMR8575
MITSUBISHI	A860X45170
YUNYI	1260D410/MIA8565



HMR8576

FEATURES:
Diodes：8-35A diodes
Diameter OD：85mm
With M5*18 Battery Post
With Capacitor/Trio

REFERENCES..

YUNYI	1260JC00
WAI/TRANSPO	IMR8576
OEM	A860X29999
OEM	A860X35099




HMR8578

FEATURES:
Diodes: 6-35A diodes
Mounting Length: 85 mm
With M5*48 Battery Post
With Trio

REFERENCES..

YUNYI	1260CW00 / MIA8535
WAI / TRANSPO	IMR8578
MITSUBISHI	A860T29370




HMR8579

FEATURES: Diodes: 8-35A Avalanche
Mounting Length: 85mm
With M5*42 Battery Post
Without Trio/Capacitor

REFERENCES..

YUNYI	1260JR00
WAI/TRANSPO	IMR8579
AS	ARC5158
MOBILETRON	RM-181




HMR8580

FEATURES: Diodes: 6-35A diodes
Mounting Length: 85mm
With M8*52 Battery Post
With Trio

REFERENCES..

WAI / TRANSPO	IMR8580
YUNYI	1260C400 / MIA8507
CARGO	137861
MOBILETRON	RM-37

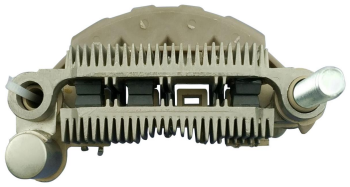


HMR8581

FEATURES: Diodes: 8-35A diodes
Mounting Length: 85mm
With M8*52 Battery Post
With Trio;With “W”

REFERENCES..

WAI/TRANSPO	IMR8581
AS	ARC5258(MITSUBISHI)
MOBILETRON	RM120
MITSUBISHI	A860X91970




HMR8582

FEATURES: Diodes: 8-35A diodes
Mounting Length: 85mm
With M8*52 Battery Post
With Trio

REFERENCES..

YUNYI	1260C500 / MIA8508
WAI / TRANSPO	IMR8582
AS	ARC5032
MOBILETRON	RM-57

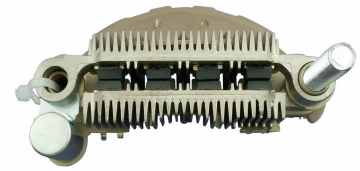


HMR8585

FEATURES: Diodes: 8-35A diodes
Diameter OD: 85mm
With M6*50 Battery Post
Without Trio
Without Capacitor

REFERENCES..

YUNYI	1260DA00/MIA8549
WAI/TRANSPO	IMR8585
AS	ARC5106
MOBILETRON	RM-154HV



HMR8588

FEATURES: Diodes: 6-35A diodes
Mounting Length: 85 mm
With M8*52 Batt. Term
With Trio

REFERENCES..

YUNYI	1260CC00 / MIA8515
WAI / TRANSPO	IMR8588
AS	ARC5171
MOBILETRON	RM-59HV



HMR8590

FEATURES: Diodes: 6-35A diodes
Mounting Length: 85mm
With M6*50 Battery Post
With Trio

REFERENCES..

YUNYI	1260CD00 / MIA8516
WAI / TRANSPO	IMR8590
AS	ARC5035
MOBILETRON	RM-36



HMR8591B

FEATURES: Diodes:6-35A diodes
Mounting Length:85mm
With M5*42 Battery
Post,Knurled
With Trio

REFERENCES..

AS	ARC5108
POWERMAX	81116616
MOBILETRON	RM-94
MITSUBISHI	A860T06870



HMR8592

FEATURES: Diodes: 6-35A diodes
Mounting Length: 85mm
With M5*42 Battery Post
With Trio

REFERENCES..

YUNYI	1260CV00 / MIA8534
WAI / TRANSPO	IMR8592
AS	ARC5076
MOBILETRON	RM-39




HMR8593

FEATURES: Diodes: 8-35A diodes
Mounting Length: 85mm
With M6*42 Batt. Term., Knurled
With Trio

REFERENCES..

WAI / TRANSPO	IMR8593




HMR8594

FEATURES: Diodes: 8-35A diodes
Mounting Length: 85mm
With M8*52 Batt. Term
With Trio

REFERENCES..

YUNYI	1260CJ00 / MIA8521
WAI / TRANSPO	IMR8594
AS	ARC5034
MOBILETRON	RM-152



HMR8595

FEATURES: Diodes: 6-35A diodes
Mounting Length: 85mm
With M6*19 Battery Post
Without Trio/Capacitor

REFERENCES..

YUNYI	1260CX00/MIA8536
WAI/TRANSPO	IMR8595
AS	ARC5078
MOBILETRON	RM-135




HMR8596

FEATURES: Diodes: 6-35A diodes
Mounting Length: 85mm
With M6*50 Batt. Term.
Without Trio.

REFERENCES..

YUNYI	1260CY00 / MIA8537
WAI / TRANSPO	IMR8596
LESTER	13580
LESTER	14206



HMR8597

FEATURES: Diodes: 8-35A diodes
Mounting Length: 85mm
With M6*50 Battery Post
With Trio

REFERENCES..

YUNYI	1260DJ00/MIA8552
WAI/TRANSPO	IMR8597
AS	ARC5151
WOODAUTO	RTF49896



HMR8598

FEATURES: Diodes: 8-35A diodes
Mounting Length: 85mm
With M6*50 Battery Post
With Trio

REFERENCES..

YUNYI	1260CZ00/MIA8538
WAI/TRANSPO	IMR8598
AS	ARC5080
MITSUBISHI	A860T39270



HMR10040

FEATURES: Diodes: 8-35A diodes
Mounting Length: 100mm
With M6*50 Batt. Term.
With Trio

REFERENCES..

YUNYI	12600900 / MIA10001
WAI / TRANSPO	IMR10040
AS	ARC5037
MOBILETRON	RM-41



HMR10042

FEATURES: Diodes: 8-35A diodes
Mounting Length: 100mm
With Trio

REFERENCES..

YUNYI	12601000 / MIA10002
WAI / TRANSPO	IMR10042
AS	ARC5038
MOBILETRON	RM-41



HMR10044

FEATURES: Diodes: 8-35A diodes
Mounting Length: 100mm
With M5*42 Batt. Term
With Trio

REFERENCES..

YUNYI	12601100 / MIA10003
WAI / TRANSPO	IMR10044
AS	ARC5039
MOBILETRON	RM-42




HMR10045

FEATURES:
Diodes: 6-35A diodes
Diameter OD: 100mm
With M8*54 Battery Post
Without Trio

REFERENCES..

YUNYI	12607000/MIA10067
WAI/TRANSPO	IMR10045
AS	ARC5150
MOBILETRON	RM-201




HMR10047

FEATURES:
Diodes : 8-35A diodes
Mounting Length : 100mm
With M5*38 Batt. Term.
Without Trio
Without Capacitor

REFERENCES..

WAI / TRANSPO	IMR10047
YUNYI	MIA10052/12605700
MAZDA	N3H1-18-W60
MITSUBISHI	A860X66270



HMR10048

FEATURES:
Diodes: 6-35A diodes
Mounting Length: 100mm
With M6*50 Battery Post
With Trio/Capacitor

REFERENCES..

YUNYI	12601300/MIA10005
WAI/TRANSPO	IMR10048
AS	ARC5040
MOBILETRON	RM-43



HMR10050

FEATURES:
Diodes: 8-35A diodes
Mounting Length: 100mm
With M6*50 Battery Post
With diode trios

REFERENCES..

WAI / TRANSPO	IMR10050
AS	ARC5041
MANDO	A600C0211
MOBILETRON	RM-43




HMR10057

FEATURES:
Diodes: 8-35A diodes
Mounting Length: 100mm
With M8*52 Battery Post
With Trio;Without Capacitor

REFERENCES..

YUNYI	12602100 / MIA10013
WAI / TRANSPO	IMR10057
AS	ARC5042
MOBILETRON	RM-99HV




HMR10058

FEATURES:
Diodes:8-35A diodes
Mounting Length: 100mm
With M8 * 52 Batt. Term.
Without diode trio.
Without capacitor.

REFERENCES..

YUNYI	12604000 / MIA10035
WAI / TRANSPO	IMR10058



HMR10060

FEATURES:
Diodes:8-35A diodes
Mounting Length: 100mm
With M8*52 Batt. Term.
With diode trio

REFERENCES..

YUNYI	12601500 / MIA10007
WAI / TRANSPO	IMR10060
WOODAUTO	RTF49889
MOBILETRON	RM-48




HMR10062

FEATURES:
Diodes: 8-35A diodes
Mounting Length: 100mm
With M6*49.5 Battery Post
With Trio/Capacitor

REFERENCES..

YUNYI	12601600/MIA10008
WAI/TRANSPO	IMR10062
FIT UNIT	F3LU-10300BC
MOBILETRON	RM-47



HMR10064

FEATURES:
Diodes:8-35A diodes
Mounting Length: 100mm
With M5*42 Batt.Term.,Knurled
With Trio

REFERENCES..

YUNYI	12603400 / MIA10029
WAI / TRANSPO	IMR10064
MITSUBISHI	A860T38670
FORD	F32Z10346B




HMR10066

FEATURES: Diodes: 8-35A diodes
Mounting Length: 100mm
With M8*52 Battery Post
With Trio/Capacitor

REFERENCES..

WAI / TRANSPO	IMR10066
LESTER	12647
LESTER	13473
LESTER	13511




HMR10067

FEATURES: Diodes:6-35A diodes
Mounting Length : 100mm
With M8*54 Battery Post
Without Trio;Without Capacitor

REFERENCES..

YUNYI	12606700/MIA10063
WAI/TRANSPO	IMR10067
AS	ARC5113
MOBILETRON	RM-139




HMR10068

FEATURES: Diodes: 8-35A diodes
Mounting Length: 100mm
With M5*42 Battery Post
With Trio

REFERENCES..

YUNYI	12601800/MIA10010
WAI/TRANSPO	IMR10068
AS	ARC5046
MOBILETRON	RM-46




HMR10070

FEATURES: Diodes: 8-35A diodes
Mounting Length: 100mm
With M5*42 Battery Post
With Trio
With Capacitor

REFERENCES..

YUNYI	12604200/MIA10037
WAI/TRANSPO	IMR10070
MITSUBISHI	A860T41370



HMR10072

FEATURES: Diodes: 8-35A diodes
Mounting Length: 100mm
With M6*50 Battery Post
With Trio

REFERENCES..

WAI / TRANSPO	IMR10072
AS	ARC5058
POWERMAX	81113717
MOBILETRON	RM-44




HMR10074

FEATURES: SPECS:12 Volt
SPECS FOR:Mitsubishi
215A IR/EF Alternators

REFERENCES..

WAI / TRANSPO	IMR10074




HIM10076

FEATURES: SPECS:12 Volt
SPECS FOR:Mitsubishi
215A IR/EF Alternators

REFERENCES..

WAI / TRANSPO	IMR10076




HMR10081

FEATURES: Diodes: 8-35A diodes
Mounting Length: 100mm
With M6*42 Battery Post
Without Trio
Without Capacitor

REFERENCES..

YUNYI	12604800/MIA10043
WAI/TRANSPO	IMR10081
MITSUBISHI	A860X79470
MOBILETRON	RM-127




HMR10088

FEATURES: Diodes:8-35A diodes
Mounting Length: 100mm
With M6*50 Batt. Term.
Without Trio.
With Capacitor.

REFERENCES..

YUNYI	12601900 / MIA10011
WAI / TRANSPO	IMR10088




HMR10090

FEATURES: Diodes:8-35A diodes
Mounting Length: 100mm
With M6*50 Batt. Term
Without diode trio.
Without capacitor.

REFERENCES..

YUNYI	12604900 / MIA10044
WAI/TRANSPO	IMR10090
MOBILETRON	RM-131HV
FIT UNIT	A3T14292




HMR10092

FEATURES: Diodes：8-35A Avalanche
Mounting Length：100mm
With M8 Battery Post
With Capacitor; With Trio

REFERENCES..


WAI / TRANSPO	IMR10092
YUNYI	1260GH00
AS	ARC5179
Marelli	6.3533E+10



HMR10095

FEATURES: Diodes: 8-35A diodes
Mounting Length: 100mm
With Trio

REFERENCES..




HMR10096

FEATURES: Diodes: 6-35A diodes
Mounting Length: 100 mm
With M8*52 Battery Post
Without Trio

REFERENCES..

WAI / TRANSPO	IMR10096
AS	ARC5153
AS-PL	UD01079ARC



HMR75816

FEATURES: Diodes: 6-35A diodes
Mounting Length: 75mm
With M5*18 Battery Post
Without Trio;Without Capacitor

REFERENCES..

YUNYI	1260BB00/MIA7545
WAI/TRANSPO	IMR75816
CARGO	235892
MOBILETRON	RM-129A




HMR85100

FEATURES: Diodes: 8-35A diodes
Mounting Length: 85mm
With M5*42 Battery Post
With Trio

REFERENCES..

YUNYI	1260CF00 / MIA8518
WAI / TRANSPO	IMR85100
AS	ARC5048
MOBILETRON	RM-58




HMR85104

FEATURES: Diodes: 8-35A diodes
Mounting Length: 85mm
With M6*50 Battery Post
With Trio

REFERENCES..

YUNYI	1260C900 / MIA8512
WAI / TRANSPO	IMR85104
AS	ARC5049
MITSUBISHI	A002TA2492




HMR85106

FEATURES: Diodes:6-35A diodes
Mounting Length : 85mm
With M6 Battery Post
With Trio;With Capacitor

REFERENCES..

YUNYI	1260DE00/MIA8553
WAI/TRANSPO	IMR85106
WOODAUTO	RTF40037
MOBILETRON	RM-94




HMR85668

FEATURES: Diodes: 8-35 A diodes
Mounting Length: 85mm
With M8*1.25 Battery Post
Without Capacitor
Without Trio

REFERENCES..

YUNYI	1260CR00/MIA8530
WAI/TRANSPO	IMR85668
AS	ARC5028
MOBILETRON	RM-128



HMR12200

FEATURES: Diodes: 12-50A diodes
Mounting Length: 122mm
With M8*1.25 Battery Post

REFERENCES..

WAI/TRANSPO	IMR12200
AS	ARC5156
CARGO	330307
MOBILETRON	RM-180HV



HMR12204

FEATURES: Diodes: 12-50A diodes
Mounting Length：122mm
With M6*1.0 Battery Post

REFERENCES..

YUNYI	12620210
WAI / TRANSPO	IMR12204
AS	ARC5216S
MOBILETRON	RM-190HV



HMR12800

FEATURES: Diodes: 12-50A diodes
Mounting Length: 128mm
With M6 Battery Post

REFERENCES..

WAI/TRANSPO	IMR12800
YUNYI	12620810
AS	ARC5188
MOBILETRON	RM-208



HMR12808

FEATURES: For : Mitsubishi 140A ER/IF Alternators
Dimensions: • 128mm OD
M6*10 mm Batt. Term.
12-50A Avalanche Press Fit Diodes, 20-24V

REFERENCES..

GPD	HR1527
WAI/TRANSPO	IMR12808
MOBILETRON	RM-199
YUNYI	12621000/MIA12106A



HR1268

FEATURES: Diodes:6-35A diodes
Mounting Length: 65mm
With M6*50 Battery Post
With Trio

REFERENCES..



HR1269

FEATURES: Diodes:8-35A diodes
Mounting Length: 75mm
With M6*50 With Trio
With Trio


REFERENCES..



HR1270

FEATURES: Diodes: 8-35A diodes
Mounting Length: 75mm
With M6 *50 Battery Post
With Trio

REFERENCES..




HR1271

FEATURES: Diodes: 8-35A diodes
Mounting Length: 85mm
With M8*52 Battery Post
With Trio

REFERENCES..

AS	ARC5036
REAL	21137231
KRAUF	AEM8594
MOBILETRON	RM-152



HR1272

FEATURES: Diodes: 6-35A diodes
Mounting Length: 85mm
With M5*48 Battery Post
With Trio

REFERENCES..




HR1273

FEATURES: Diodes: 8-35A diodes
Mounting Length: 100 mm
With M8*52 Battery Post
With Trio

REFERENCES..

AS	ARC5045
GHIBAUDI	PRP731
MOBILETRON	RM-45
MAZDA	JE48-19-



HR1340

FEATURES: Diodes: 6-35A diodes
Mounting Length: 75mm
With M6*35 Battery Post
With Trio

REFERENCES..

WAI / TRANSPO	IMR7549




HR1455

FEATURES: Diodes：8-35A diodes
Mounting Length：76mm
With M5*49 Battery Post
With Trio

REFERENCES..

YUNYI	1260DB00 / MIA7602
WAI / TRANSPO	IVR510
AS	ARC5139
KOMATSU	6008216160




HR1491

FEATURES: Diodes: 8-35A diodes
Mounting Length: 100 mm
With M5*42 Battery Post
With Capacitor

REFERENCES..

WAI / TRANSPO	IMR10094
AS	ARC5084
WOODAUTO	WOODAUTO




HR1491C

FEATURES: Diodes:8-35A diodes
Mounting Length:100mm
With M6 * 50mm Battery Post
With Trio/Capacitor

REFERENCES..

AS	ARC5069
MOBILETRON	RM-125HV




HR1491D

FEATURES: Diodes:8-35A diodes
Mounting Length:100mm
With M8 * 54mm Battery Post

REFERENCES..

WAI / TRANSPO	IMR1000
AS	ARC5102
CQ	CQ1080148
MOBILETRON	RM-146



HR1706

FEATURES: Diodes:8 A diodes
Without Trio

REFERENCES..



HR2111

FEATURES: Diodes:6-35A diodes
Mounting Length: 65mm
With M6*50 Battery Post
With Trio

REFERENCES..




HR2130

FEATURES: Diodes: 16-35A Avalanche
Mounting Length: 65mm
With M5*42 Battery Post
With Trio

REFERENCES..

OEM	REC2480AZ
OEM	A004TU6584
OEM	A004TU6088



HR2132		
FEATURES: Mounting Length:80mm With M8*52 Battery Post With Trio **REFERENCES..** 		

HNR400

FEATURES: Diodes: 6-35A diodes
Diameter OD: 100 mm
With M6*34 Battery Post
With M5 Mounting Bolt

REFERENCES..

YUNYI	12331400 / NPD11408
WAI / TRANSPO	INR400
AS	ARC6033
CARGO	135884A



HN400A

FEATURES: Diodes: 6-35A diodes
Diameter OD: 100 mm
With M6*34 Battery Post
With M5 Mounting Bolt

REFERENCES..




HNR401

FEATURES: Diodes:8-35A diodes
Diameter OD:100mm
With M6*25 Batt.Term
Aluminum Heatsink, Welded Diode

REFERENCES..

YUNYI	12325300 / NPD10002L
WAI / TRANSPO	INR401
ASE	ARC6001
MOBILETRON	RN-12




HNR403

FEATURES: Diodes: 8-50A diodes
Diameter OD: 103 mm
With M6*25 Battery Post

REFERENCES..

YUNYI	12311600 / NPD10302
WAI / TRANSPO	INR403
AS	ARC6003
TOYOTA	2735774140



HNR403PL

FEATURES: Diodes: 8-50A diodes
Diameter OD: 103mm
With M6 * 1.0 Battery Post

REFERENCES..

WAI / TRANSPO	INR403P
YUNYI	NPD10302L/12326010
CARGO	135418
TOYOTA	27357-74140



HNR716

FEATURES: Diodes:8-35A diodes
Diameter OD:83mm
With M6*25 Battery Terminal

REFERENCES..

YUNYI	12315600 / NPD8303G
WAI / TRANSPO	INR716
AS	ARC6026
MOBILETRON	RN-26




HNR719

FEATURES: Diodes: 8-35A diodes
Diameter OD: 90mm
With M6*25 Batt.Post

REFERENCES..

WAI / TRANSPO	INR719
MOBILETRON	RN-24
DENSO UNIT	101211-167
DENSO UNIT	101211-1673



HNR721

FEATURES: SPECS:12 Volt
SPECS FOR:Denso 30A IR/IF Alternators

REFERENCES..

MOBILETRON	RN-24
WAI / TRANSPO	INR721
DENSO	1.002E+09




HNR726

FEATURES: Diodes:8-35A diodes
Diameter OD: 90mm
With M6*25 Batt. Term

REFERENCES..

YUNYI	12315300 / NPD9002
WAI / TRANSPO	INR726
AS	ARC6009
MOBILETRON	RN-17



HNR718

FEATURES: Diodes:8-35A diodes
Diameter OD: 83mm
With M6 * 44 Batt. Term.

REFERENCES..

YUNYI	12314100 / NPD8301
WAI / TRANSPO	INR718
AS	ARC6004
MOBILETRON	RN-18



HNR720

FEATURES: Diodes: 8-35A diodes
Diameter OD: 100 mm
With M6*43 Battery Post

REFERENCES..

YUNYI	12310600 /NPD10001
WAI / TRANSPO	INR720
AS	ARC6005
MOBILETRON	RN-13



HNR722

FEATURES: Diodes:8-50A diodes
Diameter OD:103mm
With M8*48 Batt. Term
Welded diode terminations

REFERENCES..

YUNYI	12311700 / NPD10303
WAI / TRANSPO	INR722
AS	ARC6006
MOBILETRON	RN-05




HNR723

FEATURES: Diodes: 8-35A diodes
Diameter OD: 83mm
With M6*35 Batt. Term.

REFERENCES..

WAI / TRANSPO	INR723
AS	ARC6007
WOODAUTO	RTF40111
MOBILETRON	RN-40



HNR724

FEATURES: Diodes:8-35A diodes
Diameter OD: 90mm
With M6*44 Batt. Term.

REFERENCES..

YUNYI	12314700 / NPD8702
WAI / TRANSPO	INR724
AS	ARC6056
MOBILETRON	RN-15



HNR725

FEATURES: Diodes:8-35A diodes
Diameter OD: 90mm
With M6*43 Batt. Term
.

REFERENCES..

YUNYI	12315200 / NPD9001
WAI / TRANSPO	INR725
AS	ARC6008
MOBILETRON	RN-16



HNR730

FEATURES: Diodes：8-50 Amper
Diameter OD：103mm
With M8 Battery Post（36°）
With Copper Heat sinks

REFERENCES..

MOBILETRON	RN-19
WAI / TRANSPO	INR730
YUNYI	12316600
CARGO	135043



HNR731

FEATURES: Diodes: 8-50 Ampere
Diameter OD: 103mm
With M6 Battery Post(31°)

REFERENCES..

MOBILETRON	RN-03
WAI / TRANSPO	INR731
YUNYI	12311900/N
CARGO	133672



HNR731P

FEATURES: Diodes:8-50A Diodes
Diameter OD:103mm
With M6*43 Battery Post

REFERENCES..

YUNYI	12326200 / NPD10304L
WAI / TRANSPO	INR731P
CARGO	133672
TOYOTA	27357-0A020



HNR422

FEATURES: Diodes:12-50A Avalanche
Diameter OD: 117mm
With M6*28 Battery Post

REFERENCES..

WAI / TRANSPO	INR422
ASE	ARC6024
POWERMAX	81120107
MOBILETRON	RN-34



HNR423

FEATURES: Diodes:6-50A diodes
Diameter OD:117mm
With M8*37 Batt. Term.
With Aluminum Heat sinks

REFERENCES..

YUNYI	12302900 / NPD11720AL
WAI / TRANSPO	INR423
AS-PL	UD01152ARC
MOBILETRON	RN-55



HNR424

FEATURES: Diodes:12-50A diodes
Diameter:117mm
With M8*42 Battery Post

REFERENCES..

YUNYI	12300820 / NPD11729AL
WAI / TRANSPO	INR424
ASE	ARC6049
MOBILETRON	RN-33



HNR425

FEATURES: Diodes: 12-50A Avalanche
Diameter OD: 117mm
With M6*34.5 Battery Post
With Aluminum Heat sinks

REFERENCES..

YUNYI	12303800 / NPD11736AL
WAI / TRANSPO	INR425
ASE	ARC6034
MOBILETRON	RN-44



HNR427

FEATURES: Diodes:12-50A Avalanche
Diameter OD:117mm
With M6×33mm Battery Post
With Aluminum Heat sink

REFERENCES..

MOBILETRON	RN-34
WAI / TRANSPO	INR427
YUNYI	12307100



HNR428

FEATURES: SPECS:12 Volt
SPECS FOR:Denso 100A IR/IF
Alternator

REFERENCES..

MOBILETRON	RN-69
WAI / TRANSPO	INR428



HNR429

FEATURES: Diodes: 6-50 A Avalanche
Diameter OD: 117mm
With M6*34.5 Battery Post
With Aluminum Heat sinks

REFERENCES..

WAI/TRANSPO	INR429
YUNYI	12300900/NPD11705AL
AS	ARC6044
MOBILETRON	RN-48



HNR430

FEATURES: Diodes: 6-50 A Avalanche
Diameter OD: 117mm
With M6*1.0 Battery Post
With Aluminum Heat sink

REFERENCES..

WAI/TRANSPO	INR430
YUNYI	12300600/NPD11701AL
AS	ARC6042
MOBILETRON	RN-46



HNR431

FEATURES: Diodes :6-50A Avalanche
Diameter OD : 117mm
With M8*33 Battery Post
With Aluminum Heat sinks

REFERENCES..

YUNYI	12302200 / NPD11712AL
WAI / TRANSPO	INR431
ASE	ARC6019
MOBILETRON	RN-37



HNR727

FEATURES: Diodes:8-35A diodes
Diameter OD: 100mm
With M6*25 Batt. Term.
Welded diode terminations
Copper heat sinks

REFERENCES..

YUNYI	12311200 / NPD10006
AS	ARC6010
WAI / TRANSPO	INR727
MOBILETRON	RN-02



HNR727PL

FEATURES: Diodes: 8-50A diodes
Diameter OD: 100mm
With M6*1.0 Batt.Term.

REFERENCES..

WAI / TRANSPO	INR727P
AS	ARC6029
MOBILETRON	RN-14
POWERMAX	81113853



HNR728

FEATURES: Diodes:8-50A diodes
Diameter OD: 113mm
With M6*25 Batt. Term.
Welded diode terminations
Without mtg. hole for grd. strap.

REFERENCES..

YUNYI	12313200 / NPD11305
WAI / TRANSPO	INR728
AS	ARC6010
MOBILETRON	RN-02



HNR728PL

FEATURES: Diodes: 8-50A diodes
Diameter OD: 113mm
With M6 * 1.0 Batt.Term.

REFERENCES..

WAI / TRANSPO	INR728P
YUNYI	NPD11305L/12327200
NIPPONDENSO	121000-4000
CARGO	135416



HNR729

FEATURES: Diodes:8-50A diodes
Diameter OD: 103mm
With M6*25 Batt. Term.
Welded diode terminations,
copper heat sinks
Without mtg. hole for ground strap.

REFERENCES..

YUNYI	12311500 / NPD10301
WAI / TRANSPO	INR729
AS	ARC6011
MOBILETRON	RN-01



HNR729P

FEATURES: Diodes:8-50A Diodes
Diameter OD: 103mm
With M6 Battery Post
With Ground Screw Hole
With Aluminum Heat sinks

REFERENCES..

YUNYI	12325900/NPD10301L
WAI/TRANSPO	INR729P
MOBILETRON	RN-01
CARGO	135417



HNR734

FEATURES: Diodes:8-50A Diodes
Diameter OD:113mm
With M6*25 Battery Post

REFERENCES..

YUNYI	12313000 / NPD11303
WAI / TRANSPO	INR734
AS	ARC6010
MOBILETRON	RN-02



HNR734P

FEATURES: Diodes:8-50A Diodes
Diameter OD: 113mm
With M6*25 Battery Post
With Ground Screw Hole
With Aluminum Heat sinks

REFERENCES..

YUNYI	12327100/NPD11303L
WAI/TRANSPO	INR734P
MOBILETRON	RN-02
DENSO	021580-4820



HNR736

FEATURES: Diodes:8-50A diodes
Diameter OD:113mm
With M8*33 Batt. Term.

REFERENCES..

YUNYI	12313500 / NPD11308
WAI / TRANSPO	INR736
AS	ARC6017
MOBILETRON	RN-10



HNR732

FEATURES:
Diodes:8-50A Diodes
Diameter OD: 113mm
With M8*48 Batt. Term.
Without mtg. hole for grd. strap.
Welded diode

REFERENCES..

YUNYI	12312700 / NPD11301
WAI / TRANSPO	INR732
MOBILETRON	RN-08
WOODAUTO	RTF49893



HNR733

FEATURES:
Diodes:8-50A Diodes
Diameter OD：113mm
M8*48 Batt. Term
With GROUND SCREW HOLE

REFERENCES..

YUNYI	12312800 / NPD11302
WAI / TRANSPO	INR733
AS	ARC6013
MOBILETRON	RN-11



HNR733P

FEATURES:
Diodes:8-50 Ampere Press-fit Diodes
Diameter OD: 113mm
With M8 Battery Post(36°)
With Ground Screw Hole
With Aluminum Heat sinks

REFERENCES..

MOBILETRON	RN-11
WAI / TRANSPO	INR733
YUNYI	12327000/N



V

FEATURES:
Diodes:8-50A diodes
Diameter OD: 113mm
With M6*43 Batt. Term.
With mtg. hole for 46–82300 ground strap.

REFERENCES..

YUNYI	12313300 / NPD11306
WAI / TRANSPO	INR735
AS	ARC6016
MOBILETRON	RN-08



HNR735PL

FEATURES:
Diodes: 8-50A diodes
Diameter OD: 113mm
With M6*1.0 Batt. Term.

REFERENCES..



HR1382

FEATURES:
Diodes: 8-50A Diodes
Diameter OD: 100mm

REFERENCES..



HNR5028

FEATURES:
Diodes:8-50A diodes
Diameter OD: 100mm
With M6*43 Batt. Term.

REFERENCES..

YUNYI	12311000 / NPD10004
WAI / TRANSPO	INR5028
ASE	ARC6028
MOBILETRON	RN-38



HR1414

FEATURES:
Diodes: 8-50A diodes
Diameter OD: 113mm
With M8*1.25 Battery Post(9.6°)
With Ground Screw Hole

REFERENCES..

YUNYI	12313600 / NPD11310
AS	ARC6032
MAZDA	KJ0118W60
MOBILETRON	RN49



HNR406PL

FEATURES:
Diodes:6-50A diodes
Diameter OD:103mm
With M6 Battery POST(31*)
Press-Fit Diodes
With Aluminum Heat Sinks

REFERENCES..

WAI / TRANSPO	INR406PL
AS	ARC6089S
WOODAUTO	RTF40182
MOBILETRON	RN-36




HNR739

FEATURES: Diodes: 8-50A diodes
Diameter OD: 103mm
With M8*33 Batt.Term.

REFERENCES..

WAI / TRANSPO	INR739
YUNYI	NPD10306/12312100
AS	ARC6018
MOBILETRON	RN-04




HR1384

FEATURES: Diodes:8-50A Diodes
Diameter OD:100mm
With M6 Battery post
With Copper Plate

REFERENCES..

AS	ARC6027

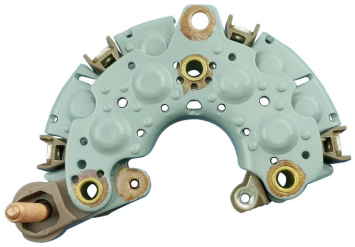

HNR502

FEATURES: Diodes: 6–35A diodes
Diameter OD: 100mm
M6 * 1.0 * 43mm Battery Post

REFERENCES..

YUNYI	12311100 / NPD10005
WAI / TRANSPO	INR502
AS	ARC6020
MOBILETRON	RN-38



HNR402

FEATURES: Diodes:8-50A diodes
Diameter OD: 103mm
With M6*43 Battery Post

REFERENCES..

YUNYI	12312500/NPD10323
WAI / TRANSPO	INR402
CARGO	237663
MOBILETRON	RN-03



HR1376

FEATURES: Diodes :6-50A Avalanche
Diameter OD : 109mm
With M6*33mm Battery Post
With Aluminum Heat sinks

REFERENCES..

YUNYI	12300200 / NPD11501A
WAI / TRANSPO	INR438
AS	ARC6050
MOBILETRON	RN-45H



HR1378

FEATURES: Diodes: 6-50A diodes
Diameter OD: 109mm
With M8*1.25 Battery Post

REFERENCES..

YUNYI	NPD11502A
MOBILETRON	RN-64
DENSO	1042109031
TOYOTA	8973697161



HNR420

FEATURES: Diodes:12-50A diodes
Diameter OD:117mm
With M8*42 Battery Post

REFERENCES..

YUNYI	12303000 / NPD11722AL
WAI / TRANSPO	INR420
AS	ARC6045
MOBILETRON	RN-30



HNR421

FEATURES: Diodes：12-50A Avalanche
Diameter OD：117mm
With M8 Battery Post

REFERENCES..

WAI/TRANSPO	INR421
YUNYI	12302700/NPD11717AL
AS	ARC6021
MOBILETRON	RN-29



HNR437

FEATURES: Diodes: 12-50 A Avalanche
Diameter OD: 117mm
With M8*30 Battery Post
With Aluminum Heat sink

REFERENCES..

WAI/TRANSPO	INR437
YUNYI	12301100/NPD11706AL
AS	ARC6020
MOBILETRON	RN-39



HR1434

FEATURES: Diodes: 6-50A Avalanche
Diameter OD: 117mm
With M6 * 33 Battery Post
With Aluminum Heat sinks

REFERENCES..

YUNYI	12300600 / NPD11701AL
WAI/TRANSPO	INR430
AS	ARC6042S
MOBILETRON	RN-46



HR1435

FEATURES: Diodes: 6-50 A Avalanche
Diameter OD: 117mm
With M6*33 Battery Post
With Aluminum Heat sinks

REFERENCES..



HR1436

FEATURES: Diodes:6-50A diodes
Diameter OD:117mm
With M6*34.5 Battery Post

REFERENCES..



HR1438

FEATURES: Diodes :6-50A Avalanche
Diameter OD : 117mm
With M8*1.25 Battery Post
With Aluminum Heat sinks

REFERENCES..

YUNYI	12302200 / NPD11712AL
WAI / TRANSPO	INR431
AS	ARC6019
MOBILETRON	RN-37



HR1439

FEATURES: Diodes: 12-50A diodes
Diameter OD: 117mm
With M8 Battery Post

REFERENCES..



HR1725

FEATURES: Diodes:12-50A Avalanche
Diameter OD: 134mm
With M8*1.25 Battery Post

REFERENCES..

AS	ARC6075
AS-PL	UD12743ARC



HR1499

FEATURES: Diodes:12-60A diodes
Diameter OD:134mm
With M8 * 1.25 Battery Post

REFERENCES..



HR1497

FEATURES: Diodes:12-50A Avalanche
Diameter OD:134mm
With M8*1.25 Battery Post

REFERENCES..

YUNYI	12304100 / NPD13401A
WAI / TRANSPO	INR435
AS	ARC6048
MOBILETRON	RN63



HR1726

FEATURES: Diodes: 12-50A Avalanche
Mounting Length: 112mm
With M6*43.7 Battery Post

REFERENCES..

YUNYI	12650110
FIT UNIT	AHGA92
FIT UNIT	A5TZ0091ZC
FIT UNIT	A5TZ0291ZC



HR2138

FEATURES:
Diodes: 8-50A diodes
Diameter OD: 100mm
With M6 Battery Post


REFERENCES..



HR2144

FEATURES:
Diodes: 12-50A diodes
Diameter OD: 134mm
With M8 Battery Post

REFERENCES..



HR1412F

FEATURES:
Diodes: 8-35A diodes
Diameter OD: 114mm 铁板
With M6*48.5 Battery Post
With M5*35 Ground Post
With M5*41.5 Mounting Bolt

REFERENCES..

AS	ARC6041



HR1412FB

FEATURES:
Diodes: 8-35A diodes
Diameter OD: 115mm
With M6/M5 Battery Post

REFERENCES..



HR1412FC

FEATURES:
Diodes: 8-35A diodes
Diameter OD: 115mm
With M6/M5 Battery Post

REFERENCES..



HR1420

FEATURES:
Diodes:6-35A diodes
Diameter OD:111mm

REFERENCES..

AS	ARC9045
NIKKO	0-33730-1800
CARGO	132491
AS-PL	UD01072ARC



HR1447

FEATURES:
Diodes:6-35A diodes
With Capacitor

REFERENCES




HR1709

FEATURES:
Diodes：6-50A Avalanche
Diameter OD：115mm
With M6×33mm Battery Postt
With Aluminum Heat Sink

REFERENCES..

YUNYI	12308100



HR1710

FEATURES:
Diodes: 3-35A Avalanche
Diameter OD: 114 mm
With M8*45 Battery Post.
With Aluminum heat skin

REFERENCES..



HPR103

FEATURES: Diodes: 6-50 Ampere
Diameter OD: 115mm
With Trio
Without Capacitor

REFERENCES

YUNYI	VAL103/12820100
VALEO	21224163
AS	ARC3027
CARGO	131569



HPR135

FEATURES: Diodes:6-50 Ampere
Diameter OD:115mm
Without Trio
With Capacitor

REFERENCES

YUNYI	12820200 / VAL135
WAI / TRANSPO	IPR135
AS	ARC3001
MOBILETRON	RP-01



HPR157

FEATURES: Diodes: 6-50 Ampere
Diameter OD: 115mm
Without Capacitor
Without Trio
For use on: Renault Alliance, 18I Fuego

REFERENCES

WAI / TRANSPO	IPR157
MOBILETRON	RP-03
YUNYI	12820300/VAL157



HPR203

FEATURES: Diodes:6-50 Ampere
Diameter OD:115mm
With Capacitor
With Trio

REFERENCES

YUNYI	12821600 / VAL688
WAI / TRANSPO	IPR203
AS	ARC3003
MOBILETRON	RP-04



HPR252

FEATURES: Diodes:6-50Ampere
Diameter OD:115mm
Without Trio
With Capacitor
Live “W”Circutit

REFERENCES

YUNYI	12820600 / VAL252
WAI / TRANSPO	IPR252
AS	ARC3004
MOBILETRON	RP-07



HPR539

FEATURES: Diodes: 6-50 Ampere
Diameter OD: 115mm
With Capacitor
Without Trio

REFERENCES

YUNYI	12820710 / VAL539
WAI / TRANSPO	IPR539
AS	ARC3006
MOBILETRON	RP-03



HPR551

FEATURES: Diodes:6-50 Ampere
Diameter OD:115mm
With Trio
With Capacitor
Live"W" Circuit

REFERENCES

YUNYI	12821300 / VAL551
WAI / TRANSPO	IPR551
AS	ARC3007
MOBILETRON	RP-02



HPR554

FEATURES: Diodes:6-50A Ampere
Diameter OD: 115mm
With Capacitor ; With Trio
With 82ohm Resistor
Live"W" Circuit

REFERENCES

WAI / TRANSPO	IPR554
AS	ARC3027
LESTER	14566
MOBILETRON	RP-04RH



HPR615

FEATURES: Diodes: 6-50 Ampere
Diameter OD: 115mm
With Capacitor
Without Trio

REFERENCES

YUNYI	12821100 / VAL615
WAI / TRANSPO	IPR615
AS	ARC3017
MOBILETRON	RP-08



HPR713

FEATURES: Diodes: 6-50 Ampere
Diameter OD: 115mm
With Capacitor
With Trio

REFERENCES

YUNYI	12821700 / VAL713
WAI / TRANSPO	IPR713
AS	ARC3008
MOBILETRON	RP-05H



HPR813

FEATURES: Diodes:6-50 Ampere
Diameter OD:115mm
With Trio
With Capacitor
With 82 Ohm Resistor

REFERENCES

YUNYI	12820900/VAL813
CARGO	133741
VALEO	A521404A
MOBILETRON	RP-09R




HPR844

FEATURES: Diodes: 8-50A Avalanche
Diameter OD: 107mm
With M8 * 50 Battery Post
With Trio ; With “W” Terminal

REFERENCES

YUNYI	12811000 / VAL845
MOBILETRON	RP-14
WAI / TRANSPO	IPR844



HPR846

FEATURES: Diodes: 8-50 A Avalanche
Diameter OD: 107mm
With M6/M8 Battery Post
With Trio ; With “W” Terminal

REFERENCES

YUNYI	12811100 / VAL846
WAI / TRANSPO	IPR846
AS	ARC3012
MOBILETRON	RP-17



HPR847

FEATURES: Diodes: 6-50A Avalanche
Diameter OD:107mm
With(M8/M6)*60.8 Battery Post
Without Trio
With "W" Terminal

REFERENCES

YUNYI	12811300 / VAL847
WAI / TRANSPO	IPR847
AS	ARC3013
MOBILETRON	RP-18



HR1203

FEATURES: Diodes:6-35A
Diameter OD:110mm

REFERENCES..

AS	ARC9083S
LADA	566502E
KRAUF	AER5665
AS-PL	UD03470ARC



HR1204

FEATURES: Diodes:6-35A diodes
Diameter OD:110mm
With Trio
With "W" Terminal
With Capacitor

REFERENCES..

AS	ARC9085S
LADA	566502
AS-PL	UD03469AR
MISCELLANEO	LA1114



HR1204D

FEATURES: Diodes:6-35A diodes
Diameter OD:110mm
With Trio
With "W" Terminal
With Capacitor

REFERENCES..



HR1209

FEATURES: Diodes: 6-35A diodes
Diameter OD:80mm

REFERENCES..



HR1213

FEATURES: Diodes: 10-50A diodes
Diameter OD: 143mm

REFERENCES..



HR1215

FEATURES: Diodes: 6-50A diodes
Diameter OD: 112mm

REFERENCES..



HR1215C

FEATURES: Diodes: 8-50A diodes
Diameter OD: 112mm

REFERENCES..



HR1215ED

FEATURES: Diodes: 8-50A diodes
Diameter OD: 112mm

REFERENCES..

HR1215ED



HR1216

FEATURES: Diodes:6-50A diodes
With M6 * 1.0 Battery Post
With Trio
With Capacitor

REFERENCES..

YUNYI	12032100 / LA1128B
AS	ARC9065
LADA	5B03-105-03
AS-PL	UD03075ARC



HR1217B

FEATURES: Diodes: 6-50A diodes
Diameter OD: 112mm

REFERENCES..



HR1217C

FEATURES: Diodes: 6-50A Avalanche
With Trio
With Capacitor
With "W" Terminal

REFERENCES..



HR1217F

FEATURES: Diodes: 6-50A Avalanche
With Trio
With Capacitor
With "W" Terminal

REFERENCES..



HR2148

FEATURES: Diodes:6-50A diodes
Diameter OD: 112mm
With M8 * 1.25 Battery Post

REFERENCES..



HR1211

FEATURES: Diodes:6-50Ampere
With Trio
With w-terminal

REFERENCES..



HR1140

FEATURES:
Diodes: 8-35 Ampere
Diameter OD: 114mm
With M6*48.5 Battery Post
With M5*40 Battery Mounting Bolt
With M5*40 Ground Post
With M5*35 Ground Mounting Bolt
With Trio;With cooper heat sink

REFERENCES..

YUNYI	12330400 / NPD11402
AS	ARC6030
CARGO	132647
FIT UNIT	1002130230



HR1201

FEATURES:
Diodes: 8-35 Ampere
Diameter OD: 114mm
With M5*47.5 Battery Post
With M5*35 Ground Post
With M5*41.5 Mounting Bolt
With Aluminum heat sink

REFERENCES..

YUNYI	NPD11401
AS	ARC6039
CARGO	132649
MOBILETRON	RN41A



HR1202

FEATURES:
Diodes: 8-35 Ampere Diodes
Diameter OD: 114mm
With M6*48.5mm Battery Post
With M5*35mm Ground Post
With M5*41.5mm Mounting Bolt
With Cooper Heat Sink

REFERENCES..

YUNYI	12331100 / NPD11407
AS	ARC6036
MOBILETRON	RN41
CARGO	132655



HR1200

FEATURES:
Diodes:6-35 Ampere
Diameter OD: 88mm
With M6*20 Battery Post
With Trio ;With Capacitor
With Aluminium heat sink

REFERENCES..

OEM	B1-D264
OEM	264000
OEM	P3162A0D00-000
OEM	31621a78b00-000



HR1208

FEATURES:
Diodes:8-35A diodes
Diameter OD:88mm
With M6 Battery Post
With Trio
With Capacitor
With Aluminium heat sink

REFERENCES..

WAI / TRANSPO	IYR751
AS	ARC9020
WOODAUTO	RTF40024
CARGO	233484



HR1536

FEATURES:
Diodes: 6-50A Avalanche
Diameter OD: 103 mm
With M6*1.0 Battery Post.


REFERENCES..



HR1316

FEATURES:
Diodes: 6-50A diodes
Diameter OD: 100mm

REFERENCES..



HR1364

FEATURES:
Diodes: 8-50A diodes
Diameter OD: 131mm

REFERENCES..



HR1308

FEATURES:
Diodes: 6-50A diodes
Diameter: 115mm
With M6*1.0 Battery Post

REFERENCES..




HR1250

FEATURES:
Diodes:8-50A Avalanche
With M8 * 37mm Battery Post
With M5 * 28.5mm Trio Post
With Trio
With Capacitor

REFERENCES..


AS	ARC9023
CARGO	231050
MAHLE	MGX 318
WOODAUTO	RTF40000



HR1252

FEATURES:
Diodes:6-50A Avalanche
With M8*37 Battery Post
With M5*28.5 Trio Post
With Trio
With Capacitor

REFERENCES..



HR1424-8

FEATURES:
Diodes: 8-50 A Avalanche
With M8*54 Battery Post
With M5*32 Trio Post
With M5*32 W Post
With Trio;With Capacitor

REFERENCES..

AS	ARC9024
CQ	CQ1080456
WOODAUTO	RTF39998
AS-PL	UD01576ARC




HR1426

FEATURES:
Diodes: 8-50A Avalanche
With M6*54 Battery Post
With M5*32 Trio Post
With M5*32 W Post
With Trio ; With Capacitor

REFERENCES..

AS	ARC9025



HR1430

FEATURES:
Diodes:6-50A diodes
With M8*54 Battery post
With M5*32 Trio post
With Trio
With Capacitor

REFERENCES



HR1705

FEATURES:
Diodes: 8-50A diodes
Diameter OD: 111mm
With M6*1.0 Battery Post
With M5*0.8 Battery Post

REFERENCES..



HR2142

FEATURES:
Diodes:8-50A Avalanche
With M8*37 Battery Post

REFERENCES..



HR1266

FEATURES:
Diodes: 6-35A diodes
Diameter OD: 108mm

REFERENCES..



HR1267

FEATURES:
Diodes:6-35A Avalanche
Diameter OD:108 mm
With M8*1.25 Battery Post
With M6*1.0 Battery Post

REFERENCES..

AS	ARC0226S
AS-PL	UD18791ARC
KRAUF	AEB1107
CASCO	CRC10116GS



HR1575

FEATURES: Diodes: 8-35A diodes
Diameter OD: 115mm
With M8 Battery Post


REFERENCES..



HR1324

FEATURES: Diodes:6-35A diodes
With M6*36 Battery Post
With M5*30 Mounting Bolt

REFERENCES..



HR2129(WF75-27)

FEATURES: Diodes: 8-35A Avalanche
With Tiro

.

REFERENCES..



HR1483

FEATURES: Diodes:8-35A diodes
Diameter OD: 137mm
With M6*1.0 Battery Post

REFERENCES



HR1485

FEATURES: Diodes: 8-35A diodes
Diameter OD: 137mm
With M6*1.0 Battery Post

REFERENCES..



HR1531

FEATURES: Diodes:8-35A diodes
Diameter OD:137mm

REFERENCES..



HR1487A

FEATURES: Diodes: 8-35A diodes
Diameter OD: 70mm

REFERENCES..



HR1488

FEATURES: Diodes:6-35A diodes
Mounting Length:70mm
Stamped steel heat sink

REFERENCES..
YUNYI 12610500 / MIP7002



UQP40-15

FEATURES: Diodes: 6-25A Avalanche

.

REFERENCES..
OEM 27040-31080



HR1256

FEATURES: Diodes: 8-35A diodes
Diameter OD: 129mm
With M6 Battery Post

REFERENCES..



HR1311

FEATURES: Diodes: 8-35A Avalanche

REFERENCES..



HR1448

FEATURES: Diodes:6-35A diodes

REFERENCES




HMER102

FEATURES: Diodes:6-35A diodes
With Trio

REFERENCES..

YUNYI	12700900 / MG6911
WAI / TRANSPO	MER102
LUCAS	UBB505
MOTOROLA	501-076




HHR737+HH767

FEATURES: 整流器：HHR737
调节器：HH767

REFERENCES

YUNYI	1150A810 / HI11408ZT
WAI/TRANSPO	IHR737+IH767
AS	ARR2009
HITACHI	LR190-737



HHR738+HH738

FEATURES: 整流器：HHR738
调节器：HH738

REFERENCES

YUNYI	1150AC10 / HI11410ZT
WAI/TRANSPO	IHR738+IH738
AS	ARR2018
MOBILETRON	RVH050



HHR738B+HH738

FEATURES: 整流器：HHR738B
调节器：HH738

REFERENCES




HHR744+HH765

FEATURES: 整流器：HHR744
调节器：HH765

REFERENCES


YUNYI	1150A400/HI11407AZT
WAI/TRANSPO	IHR744+IH765
LESTER	13645



HHR744A+HH765

FEATURES: 整流器：HHR744A
调节器：HH765


REFERENCES



HHR745+HH767

FEATURES: 整流器：HHR745
调节器：HH737


REFERENCES



HHR746+HH738

FEATURES: 整流器：HHR746
调节器：HH738

REFERENCES




HHR746+HH767

FEATURES: 整流器：HHR746
调节器：HH767

REFERENCES

YUNYI	11509310 / HI11403ZT
WAI/TRANSPO	IHR746+IH767
OEM	CHZT11403
HITACHI	LR170-748



HHR746B+HH767

FEATURES: 整流器：HHR746B
调节器：HH767

REFERENCES




HHR749+HH776

FEATURES: 整流器：HHR749
调节器：HH776

REFERENCES

YUNYI	11508510 / HI11401ZT
WAI/TRANSPO	IHR749+IH776
AS	ARR2007
MOBILETRON	RVH001



HHR762+HH744

FEATURES: 整流器：HHR762
调节器：HH744

REFERENCES


OEM	CHZT11423



HHR764+HH744

FEATURES: 整流器：HHR764
调节器：HH744

REFERENCES




HHR769+HH769

FEATURES: 整流器：HHR769
调节器：HH769

REFERENCES


YUNYI	11501100 / HI11301AZT
WAI/TRANSPO	IHR769+IH769
AS	ARR2001
MOBILTRON	RV-H002



HHR771+HH744

FEATURES: 整流器：HHR771
调节器：HH744


REFERENCES



HHR773+HH744

FEATURES: 整流器：HHR773
调节器：HH744


REFERENCES



HHR773+HH765

FEATURES: 整流器：HHR773
调节器：HH765

REFERENCES




HHR773+HH766

FEATURES: 整流器：HHR773
调节器：HH766

REFERENCES


YUNYI	11502400 / HI11303AZT
WAI/TRANSPO	IHR773+IH766
AS	ARR2042
OEM	CHZT11303A



HHR773C+HH744

FEATURES: 整流器：HHR73C
调节器：HH744

REFERENCES




HHR773D+HH765

FEATURES: 整流器：HHR773D
调节器：HH765

REFERENCES


YUNYI	11503200 / HI11306ZT
AS	ARR2006
OEM	CHZT11306
HITACHI	LR190734



HHR778+HH767

FEATURES: 整流器：HHR778
调节器：HH767


REFERENCES



HHR783Z+HH767LA-1

FEATURES: 整流器：HHR783
调节器：HH767-1

REFERENCES



HR1302

FEATURES: 整流器：HR1302
调节器：HR1302-R

REFERENCES

YUNYI	11501500 / HI11302A-1ZT
AS	ARR2020
OEM	CHZT11302
NEW ERA	IVR-HIT01



HR1303

FEATURES: 整流器：HHR1303
调节器：HR1303-R

REFERENCES



HR1309

FEATURES: 整流器：HR1309
调节器：HR1309

REFERENCES

OEM	CHZT610-1



HR1334A

FEATURES: 整流器：HR1334
调节器：HH768

REFERENCES




HR1352-LM

FEATURES: 整流器：HHR1352
调节器：HH1352-R

REFERENCES

YUNYI	HI11308BZT




HR1352B-LM

FEATURES: 整流器：HR1352B
调节器：HR1352-R

REFERENCES


YUNYI	HI11308BZT



HR1352C-LA

FEATURES: 整流器：HR1352
调节器：HR1302-R


REFERENCES



HR1352D-LM

FEATURES: 整流器：HR1352A
调节器：HR1352-R

REFERENCES



HR1354Z-L

FEATURES: 整流器：HR1354Z
调节器：HR1354-R

REFERENCES


YUNYI	HI11402ZT
AS	ARR2003
UNIPOINT	REC698
MOBILETRON	RVH003B



HR1553-8-LA

FEATURES: 整流器：HR1553-8
调节器：HH738

REFERENCES




HR1555

FEATURES: 整流器：HHR770
调节器：HH744

REFERENCES

OEM	CHZT11324A-1



HR1711-LM

FEATURES: 整流器：HR1302
调节器：HR1303-R

REFERENCES



HR2223

FEATURES: 整流器：HR1302
调节器：HR2223-R

REFERENCES



HHR723+HH254L

FEATURES: REGULATOR：HHR723
RECTIFIER：HH254

REFERENCES

OEM	CHZT511



HR1304

FEATURES: 整流器：HHR723
调节器：HH253

REFERENCES

YUNYI	11520100 / HI11116ZT
OEM	CHZT512
MOBILETRON	RV-H005BA
HITACHI	LR270-05



HR1306

FEATURES: 整流器：HHR723
调节器：HH252

REFERENCES
YUNYI HI111ZT31135F
MOBILETRON RV-H005A
HITACHI LR150-431
HITACHI L140-53202



HR1446

FEATURES: 整流器：HHR734
调节器：HH203

REFERENCES
OEM E37-R4410001



HR1459

FEATURES: 整流器：HHR728
调节器：HH204

REFERENCES
YUNYI HI111ZTN31135F
HITACHI L150-13204



HR1533

FEATURES: 整流器：HHR709
调节器：HH205A


REFERENCES



HR1550

FEATURES: 整流器：HR1550
调节器：HR1550

REFERENCES
YUNYI HI113ZT12835F
CARGO 135680



HR1552

FEATURES: 整流器：HHR723
调节器：HH020L-FM

REFERENCES



HR1558

FEATURES: 整流器：HHR723
调节器：HH254

REFERENCES
YUNYI HI111ZT41135F
HITACHI L140-53202
HITACHI L150-83201



HR1601

FEATURES: 整流器：HHR723
调节器：HH205

REFERENCES



HR1603

FEATURES: 整流器：HHR723
调节器：HH205-B

REFERENCES
OEM CHZT205-24V



HR1708

FEATURES: 整流器：HR1708
调节器：HH257B-FM

REFERENCES



HMR10096+HIM847

FEATURES: 整流器：HMR10096
调节器：HIM847


REFERENCES



HR1606

FEATURES: 整流器：HNR402
调节器：HN437
碳刷架：HR6001


REFERENCES



HR1376-PR

FEATURES: 整流器：HR1376-P
调节器：HRR2028


REFERENCES



HR1376-PRB

FEATURES: 整流器：HR1376-P
调节器：HH2028
碳刷架：HR6006


REFERENCES



HNR422RB

FEATURES: 整流器：HNR422
调节器：HN6015
碳刷架：HR6006


REFERENCES



HR1706+HIM843TA

FEATURES: 整流器：HR1706
调节器：HIM843

REFERENCES



HR1253A

FEATURES:

Brackets:
Outer Diameter:129mm
Rectifiers:
Diodes:6-50A Avalanche
With M8 Battery Post
With Trio

REFERENCES



HR1253B

FEATURES:

Brackets:
Outer Diameter:129mm
Rectifiers:
Diodes:6-50A
With M8 Battery Post
With Trio

REFERENCES



HR1317A

FEATURES:

Brackets:
Outer Diameter:138mm
Rectifiers:
Diodes:6-60A Avalanche
With M8*34 Battery Post

REFERENCES




HR1319A

FEATURES:

Brackets:
Outer Diameter:133mm
Rectifiers:
Diodes:6-60A Avalanche
With M8*34 Battery Post

REFERENCES



HR1319D

FEATURES:

Brackets:
Outer Diameter:137mm
Rectifiers:
Diodes:6-60A Avalanche
With M8*30 Battery Post

REFERENCES
AS ARC3052




HR1319D-1

FEATURES:

Brackets:
Outer Diameter:137mm
Rectifiers:
Diodes:6-70A Avalanche
With M8*30 Battery Post

REFERENCES




HR1473

FEATURES:

Brackets:
Outer Diameter:114mm
Rectifiers:
Diodes:6-50A Avalanche
With M6*34 Battery Post
With Trio

REFERENCES




HR1476C

FEATURES:

Brackets:
Outer Diameter:129mm
Rectifiers:
Diodes:6-50A Avalanche
With M8*30 Battery Post

REFERENCES
AS ARC3060




HR1476G

FEATURES:

Brackets:
Outer Diameter:119mm
Rectifiers:
Diodes:6-50A Avalanche
With M8*30 Battery Post

REFERENCES




HR1476H

FEATURES:
Brackets:
Outer Diameter:119mm
Rectifiers:
Diodes: 6-50 A Avalanche
With M8*1.25 Battery Post

REFERENCES

AS	ARC3179S
AS-PL	UD18826AR



HR1513A

FEATURES:
Brackets:
Outer Diameter:129mm
Rectifiers:
Diodes:6-50A Avalanche
With M8*30 Battery Post

REFERENCES



HR1513C

FEATURES:
Brackets:
Outer Diameter:129mm
Rectifiers:
Diodes:6-50A Avalanche
With M8*30 Battery Post

REFERENCES



HR1513C-1

FEATURES:
Brackets:
Outer Diameter:129mm
Rectifiers:
Diodes:6-50A Avalanche
With M8*30 Battery Post

REFERENCES




HR1515B

FEATURES:
Brackets:
Outer Diameter:137mm
Rectifiers:
Diodes:6-50A Avalanche
With M8 * 1.25 Battery Post

REFERENCES

AS	ARC3029



HR1515D

FEATURES:
Brackets:
Outer Diameter:137mm
Rectifiers:
Diodes:6-50A Avalanche
With M8 * 1.25mm Battery Post


REFERENCES



HR1559

FEATURES:
Brackets:
Outer Diameter:133mm
Rectifiers:
Diodes:6-60A Avalanche
With M8*43 Battery Post

REFERENCES



HR1573

FEATURES:
Brackets:
Outer Diameter:121mm
Rectifiers:
Diodes:6-50A Avalanche
With M8*1.25 Battery Post


REFERENCES



HR1713

FEATURES:
Brackets:
Outer Diameter:108mm
Rectifiers:
Diodes: 6-35 Ampere
Diameter OD: 114mm

REFERENCES




HR1717

FEATURES:

Brackets:
Outer Diameter:108mm
Rectifiers:
Diodes:6-35A Avalanche
Diameter OD:102mm
With M6 * 1.0 Battery Post

REFERENCES

AS	ARC6097S
AS-PL	UD18920ARC




HR1718

FEATURES:

Brackets:
Outer Diameter:108mm
Rectifiers:
Diodes:6-35A Avalanche
Diameter OD:102mm
With M6*1.0 Battery Post

REFERENCES

AS	ARC6098S
AS-PL	UD18922AR




HR1719

FEATURES:

Brackets:
Outer Diameter:108mm
Rectifiers:
Diodes: 6-35 Ampere
Diameter OD: 116mm

REFERENCES



2025 Version

GPD
AUTOMOTIVE ELECTRONICS

CATALOGUE EDITION

RUIAN HENGHAO AUTOPARTS FACTORY

Add：Add:No.31,Yuanqu South Road.,Shuangqiao Industrial Zone,Tangxia Town,Ruian City

Tel：0086-577-65321918

Fax：0086-577-65321899

E-mail：info@cnhaobo.com

Http：www.GPD.cn.com

Wechat

WhatsApp